

Quick Start Guide: Access CDE 1911 Web GUI

1 Connect the CDE to a PC or local network using Ethernet

If no DHCP server is available (typical in direct connection) the device and PC assign themselves an IP in the 169.254.x.x range using Automatic Private IP Addressing (APIPA).

2 Find out which IP address has been assigned

- Standalone device: connect the CDE to a PC via USB and open YelloGUI or Lynx Centraal.
- Rack Mounted devices: connect the CDE to the Rack Controller via USB and look it up in Lynx Centraal under the "yellow" device list.

The IP address and network parameters will appear on the network panel.

Access the Web User Interface

3 Copy the CDE 1922 IP address into your web browser. Your browser may show a security warning. You can either ignore it or upload an SSL certificate to the device to address the security risk.

On the login page enter the default password:

yellobrik\$admin

Change the password in the system settings.

Note: A factory reset using the physical button located on the device also resets the password.



Technical Specifications

Video Formats	2K 2048x1080p HD 1920x1080p HD 1920x1080PsF HD 1920x1080i HD 1280x720p	23.98, 24, 25, 29.97, 30, 47.95, 48, 50, 59.94, 60 23.98, 24, 25, 29.97, 30, 50, 59.94, 60 23.98, 24, 25, 29.97, 30 50, 59.94, 60 23.98, 24, 25, 29.97, 30, 50, 59.94, 60
Color Precision	YCbCr 4:2:2 10-bit	
SDI I/O	2x 3G-SDI inputs on BNC connector 2x 3G-SDI outputs on BNC connector	
	Electrical Return Loss to 1.5GHz >15dB Automatic cable EQ	to 3GHz >10dB 1.5GbE 200m* Belden 1694A
IP I/O	2x 10GbE Media LAN SFP cages (also usable for in-band control) 2x 1GbE RJ45 Control LAN ports	3GbE 150m* Belden 1694A
	Compatible Media LAN SFPs: OH-TR-10G-LC-MM OH-TR-10G-LC OH-TR-10G-RJ45 OH-TR-10G-XXXX-LC	10GbE Duplex Fiber Transceiver SFP Multi-mode 550m* LC 10GbE Duplex Fiber Transceiver SFP 20km* LC 10GbE Ethernet Transceiver SFP 30m* RJ45 CWDM 1270-1610nm Duplex 10GbE 40km* Transceiver LC
	SMPT E ST 2110-20: SMPT E ST 2022-7: SMPT E ST 2110-30: SMPT E ST 2110-31: SMPT E ST 2110-40: SMPT E ST 2110-10: SMPT E ST 2059:	Uncompressed Active Video Seamless Protection Switching 1-8 Channel PCM Digital Audio Raw AES Audio Ancillary Data acc. SMPT E ST 29-1 RTP System Timing Precision Timing
Power	+12V DC @ 16W nominal (incl. 2xSFP) - (7-24V DC input range)	
Physical	Size (incl. connectors): 140mm x 90mm x 22mm (4.96" x 3.54" x 0.86") Weight (excl. SFP): 200g (7.05oz)	
Ambient	5 - 40°C (41 - 104°F) 90% Humidity (non condensing)	
Includes	Module, AC power supply	

LYNXTechnik | Broadcast Television Equipment


yellobrik®

yellobrik®

Quick Reference

CDE 1922

3G-SDI / ST 2110 Bi-Directional Converter

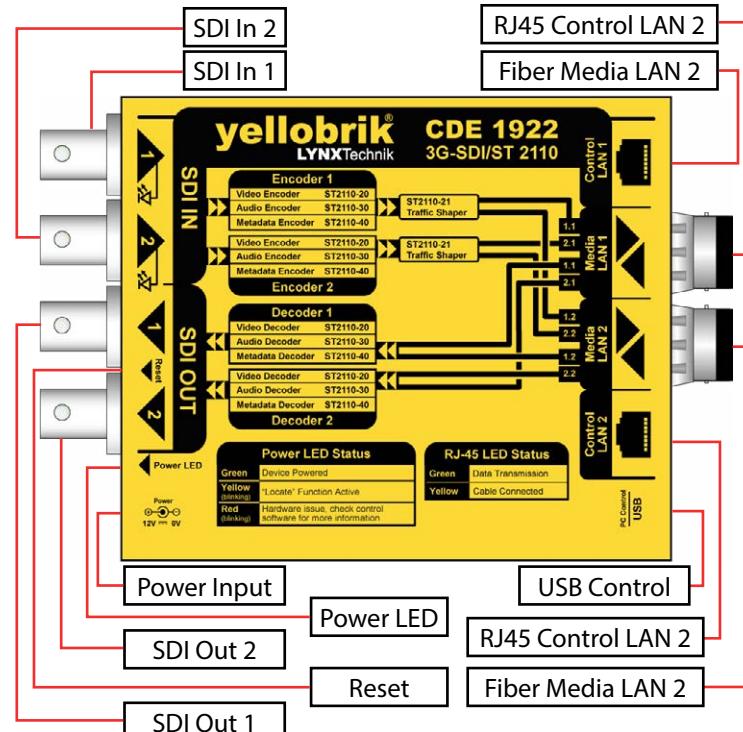

WARNING
CLASS 1M LASER PRODUCT



Laser Radiation
Do not look directly into emitter
with optical instruments

Connections

All connections are clearly labeled on the module.

SDI inputs and outputs use standard 75 Ohm BNC connectors.


LAN controls are done via 1GbE RJ45 port.

Media LAN via 10GbE Transceiver fiber connections


A mini USB port is available for updates, control, and configuration via

LynxCentraal or yelloGUI.

Left Side

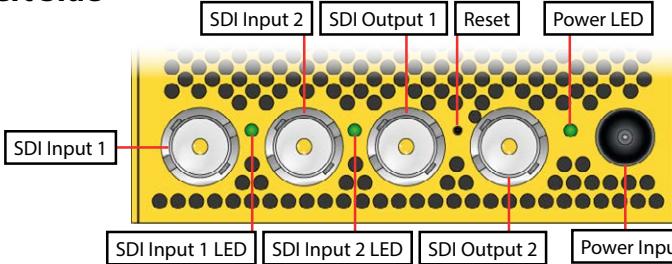

Right Side

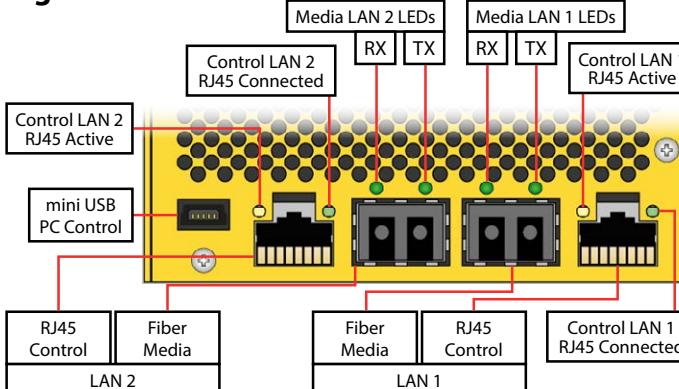

Operation

The CDE 1922 is designed for seamless integration into hybrid SDI and IP workflows, offering automatic signal detection and routing upon power-up. While the default factory configuration covers most standard applications, advanced settings for video, audio and PTP can be accessed using NMOS or through LynxCentraal / yelloGUI.

Module LEDs

Power LED

- Green Power OK - no internal programmed settings are present (factory preset)
- Yellow Power OK - some programmed settings are active*
- Yellow (blinking) "Locate Module" function active
- Red (blinking) Hardware Issues
- Off Power not present

*Internal settings have been made using LynxCentraal or the Web GUI

SDI Input

- Green Valid Signal
- alternating Green/Red Only on SDI-Input: Input recognized, but format not compatible
- Off No Valid Signal Detected

Mounting Solutions

The optional RFR 1001 mounting bracket can be used to permanently mount the module on any surface or on 19" rack rails.



The RFR 1200 rack frame can be used to mount up to four CDE 1922 yellobriks.

Support

If you encounter issues or have questions visit our knowledge base for FAQ on your product.



Can't find the answer to your problem? Contact our support team for individual support

support.lynx-technik.com

Firmware Updates / Control Software

To update a yellobrik, connect it to the latest version of Lynx Centraal or YelloGUI. The application will check for firmware updates. In Lynx Centraal, navigate to the "Update" tab then select the devices to update and click on "Start Update".



www.lynx-technik.com/software-applications/

Firmware updates are always free of charge.