

WyreStorm Product Line Receiver Compatibility Chart




CUSTOM HDBASET MATRICES

MX-1x1x-H2XC



TX-H2X-HDMI

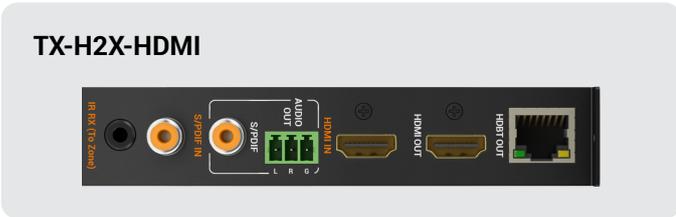

Option 1 - RX-70-4K

PoH (powers from matrix), 1-way IR (TX > RX), Routed RS-232 passthrough (TX > RX), 70M 4K A/V



Option 2 - RX-70-4K-ARC

PoH (powers from matrix), 1-way IR (TX > RX), Routed RS-232, Ethernet passthrough, 70M 4K A/V, Audio Return Channel

1U HDBASET MATRICES

MXV-0808-H2L



Option 1 - RXV-35-4K

PoC, Bidirectional IR, Routable RS-232, 35M 4K 18Gbps A/V



Option 2 - RXV-35-SCL

PoC, Bidirectional IR, Routable RS-232, 35M 4K 18Gbps A/V, HDMI Scaler, Audio De-embed

MXV-0x0x-H2A



Option 1 - RXV-35-4K

PoC, Bidirectional IR, Routable RS-232, 35M 4K 18Gbps A/V



Option 2 - RXV-35-SCL

PoC, Bidirectional IR, Routable RS-232, 35M 4K 18Gbps A/V, HDMI Scaler, Audio De-embed

MXV-0x0x-H2A-70



Option 1 - RXV-70-4K-G2

PoC, Bidirectional IR, Routable RS-232, 70M 4K 18Gbps A/V



Option 2 - RXV-70-G2-SCL

PoC, Bidirectional IR, Routable RS-232, 70M 4K 18Gbps A/V, HDMI Scaler, Audio De-embed

STAND-ALONE TRANSMITTERS

TX-35-IW



Option 1 - RX-35-POH

PoH (power to TX), 1-way IR (TX > RX), RS-232 passthrough (TX > RX), 35M 4K A/V



Option 2 - TX-H2X-HDBT

1-way IR (TX > RX), RS-232 passthrough (TX > RX), 35M 4K A/V



Option 3 - SW-515-RX


1-way IR (TX > RX), RS-232 passthrough (TX > RX), Ethernet passthrough, USB passthrough, 35M 4K A/V

TX-70-4K



Option 1 - RX-70-4K

PoH (powers from matrix), 1-way IR (TX > RX), Routed RS-232 passthrough (TX > RX), 70M 4K A/V



Option 2 - TX-H2X-HDBT

PoH (powers TX), 1-way IR (TX > RX), RS-232 passthrough (TX > RX), 70M 4K A/V



Option 3 - SW-515-RX

1-way IR (TX > RX), RS-232 passthrough (TX > RX), Ethernet passthrough, USB passthrough, 35M 4K A/V

SW-130-TX-Ux



Recommended Receiver - RX-700

PoH, (powers TX), USB passthrough, RS-232 passthrough (TX > RX), 100M 4K 18Gbps A/V



Option 2 - RX-70-4K

PoH (powers TX), RS-232 passthrough (TX > RX), 70M 4K A/V



Option 3 - TX-H2X-HDBT

PoH (powers TX), 70M 4K A/V



Option 4 - SW-515-RX

RS-232 passthrough (TX > RX), USB passthrough, 100M 4K A/V

PRESENTATION SWITCHERS


SW-510-TX



Recommended Receiver - SW-515-RX
 1-way IR (TX > RX), RS-232 passthrough (TX > RX), Ethernet passthrough, USB passthrough, 100M 4K A/V



Option 2 - RX-700
 1-way IR (TX > RX), RS-232 passthrough (TX > RX), USB passthrough, 100M 4K A/V



Option 3 - TX-H2X-HDBT
 1-way IR (TX > RX), RS-232 passthrough (TX > RX), 70M 4K A/V

SW-515-RX



Recommended Transmitter - SW-510-TX
 1-way IR (TX > RX), RS-232 passthrough (TX > RX), Ethernet passthrough, USB passthrough, 100M 4K A/V

Option 2 - SW-130-TX
 PoH (powers from switcher)
 70M 4K A/V



Option 3 - TX-35-IW
 PoH (powers from matrix)
 1-way IR (TX > RX),
 RS-232 passthrough (TX > RX)
 35M 4K A/V



SW-740-TX



Recommended Transmitter - RX-700

1-way IR (TX > RX), RS-232 passthrough (TX > RX),
Ethernet passthrough, USB passthrough, 100M 4K A/V



Option 2 - RX-70-4K

PoH (powers from TX). 1-way IR (TX > RX), RS-232
passthrough (TX > RX), 70M 4K A/V