




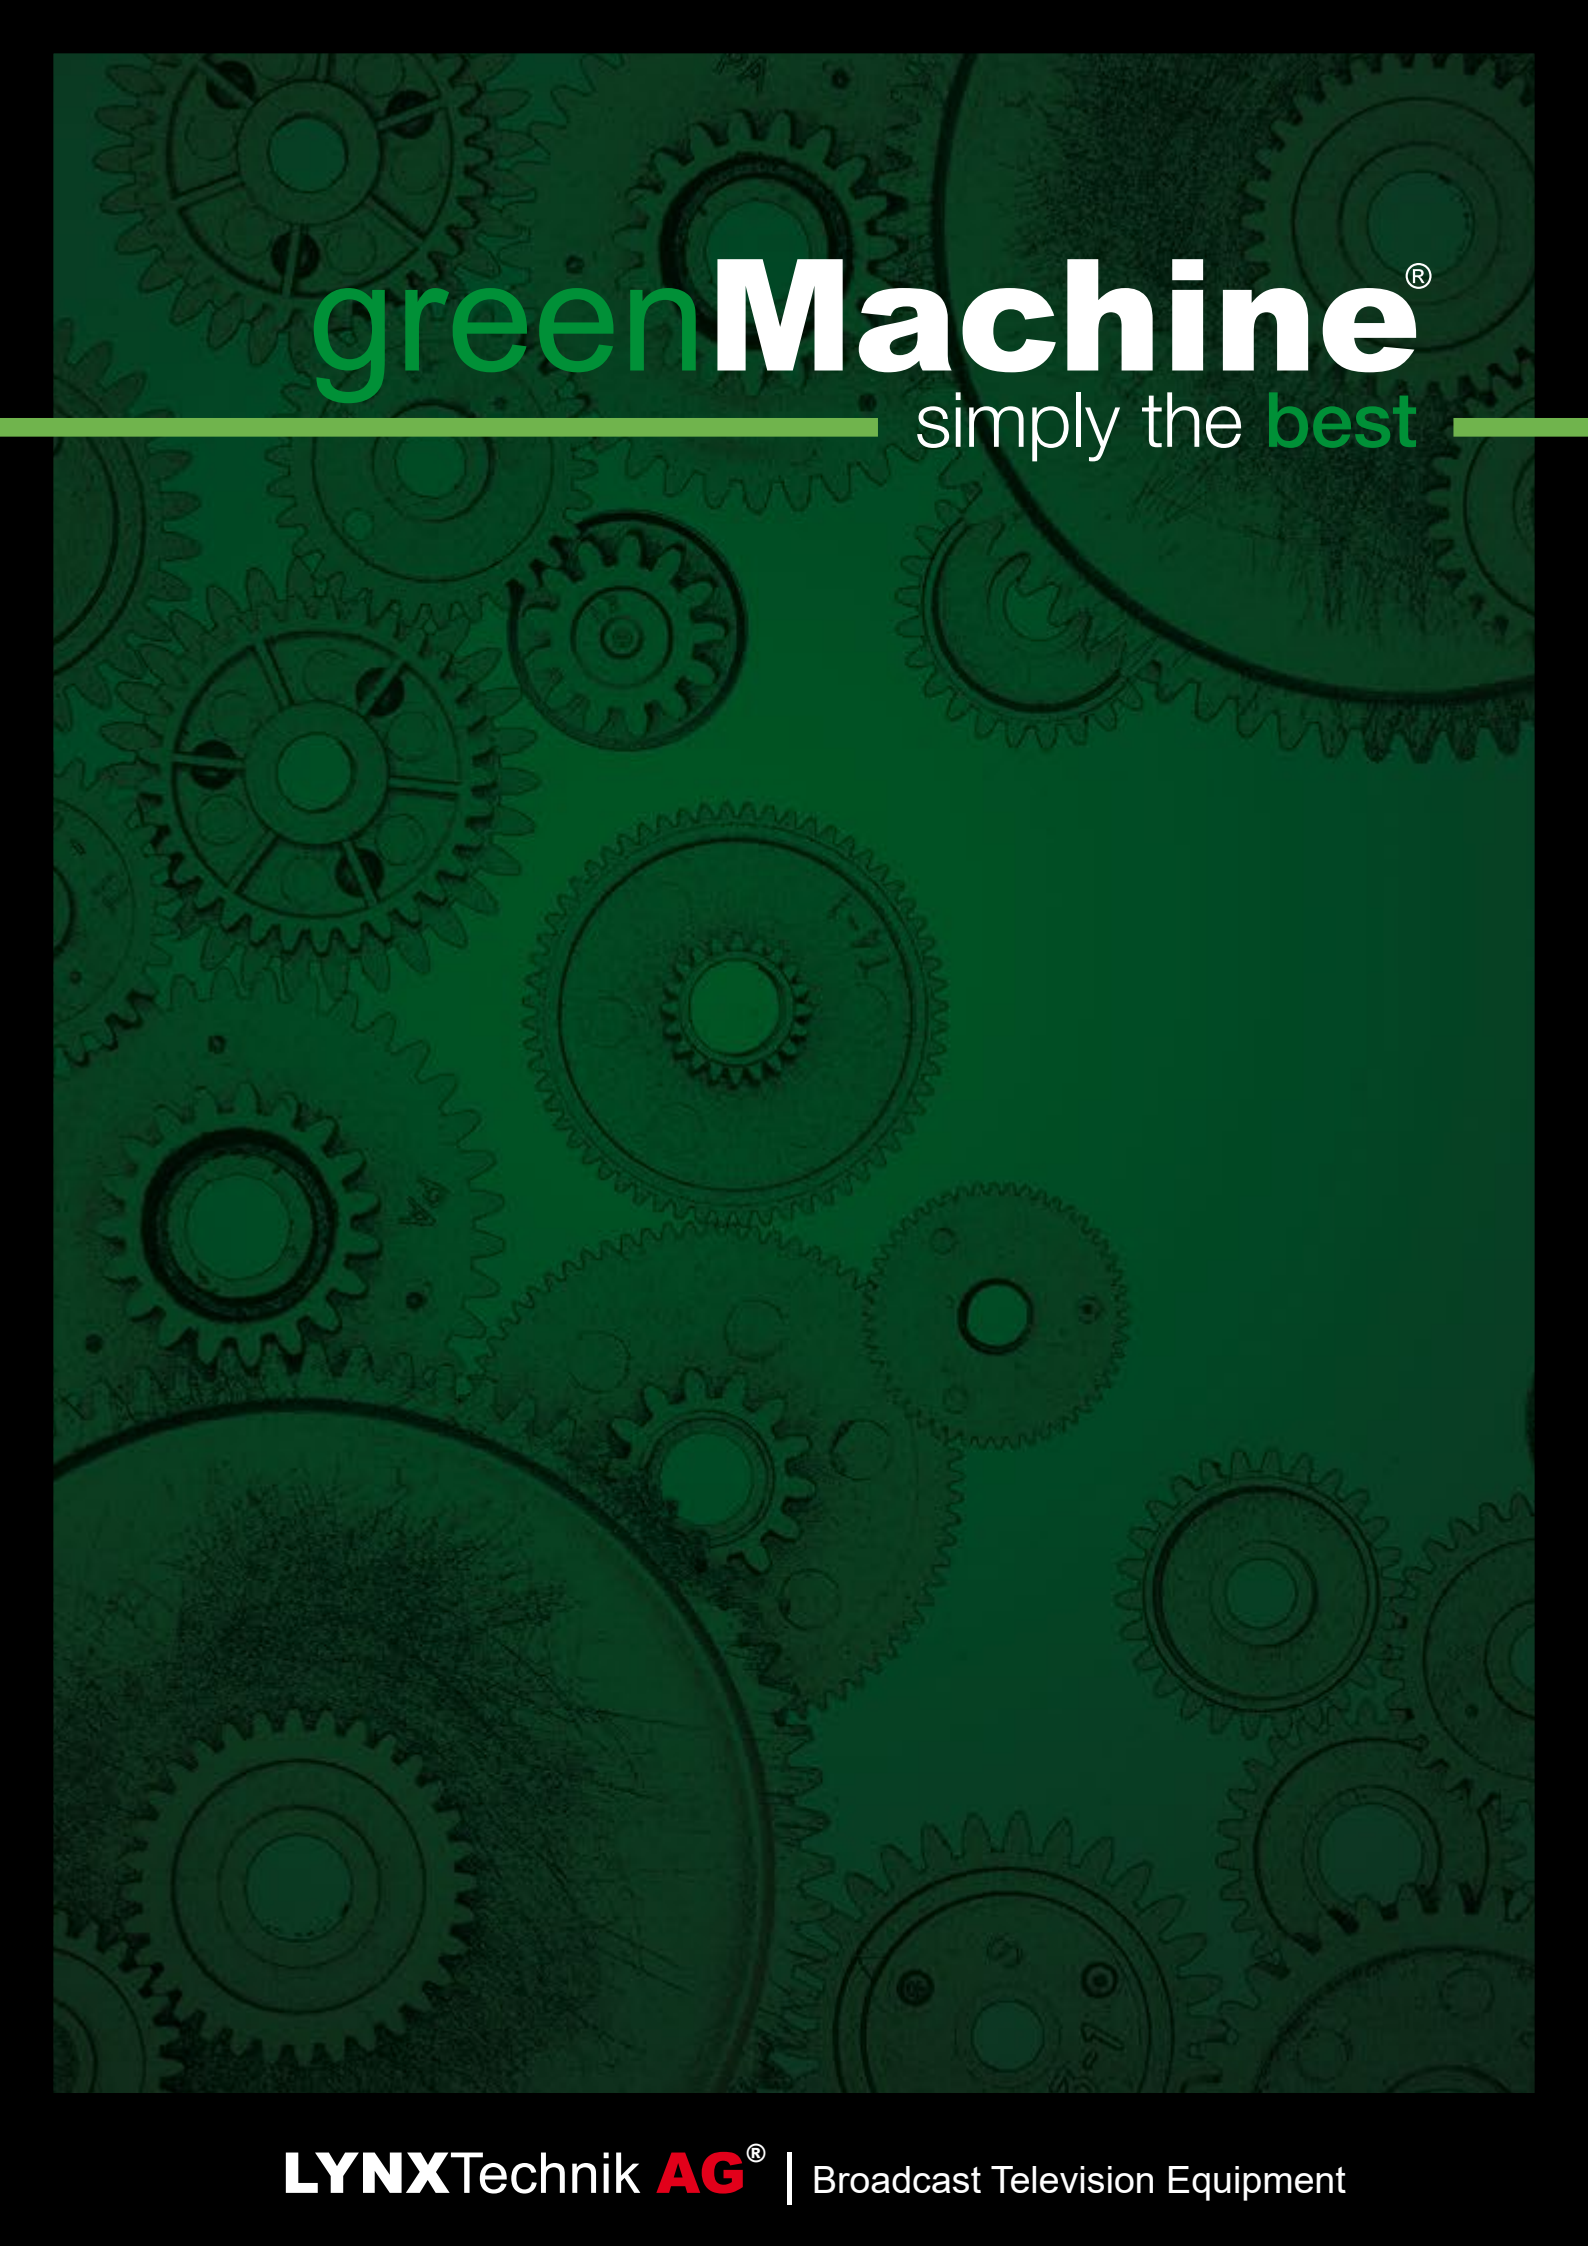

greenMachine[®]
simply the **best**

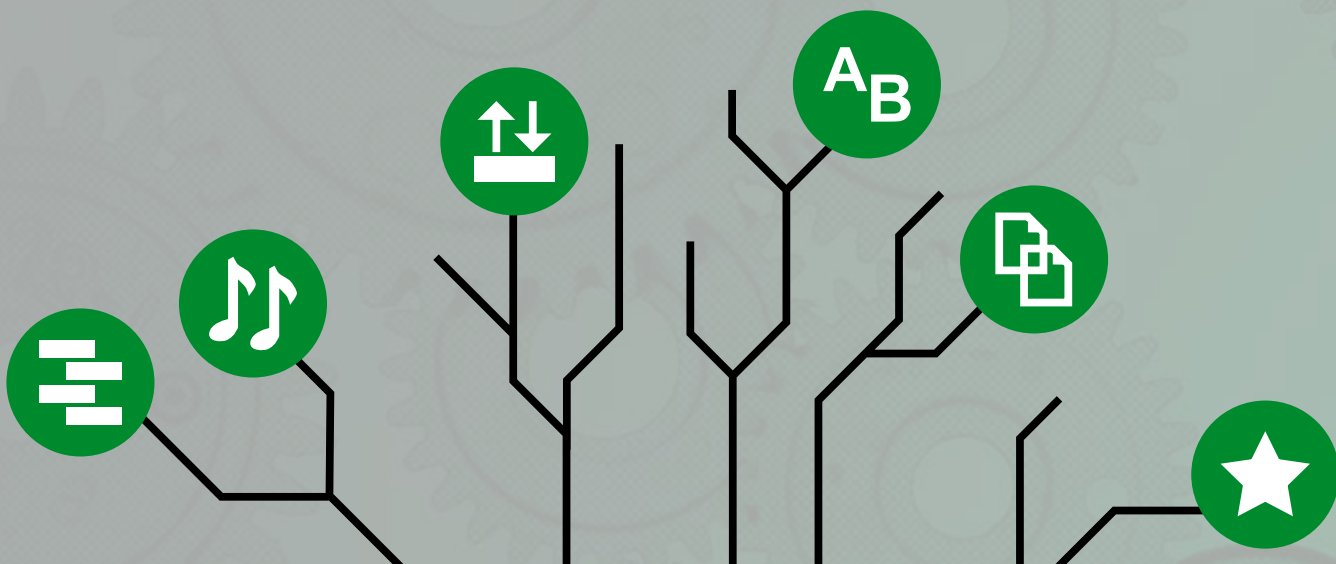

greenMachine[®]
simply the **best**

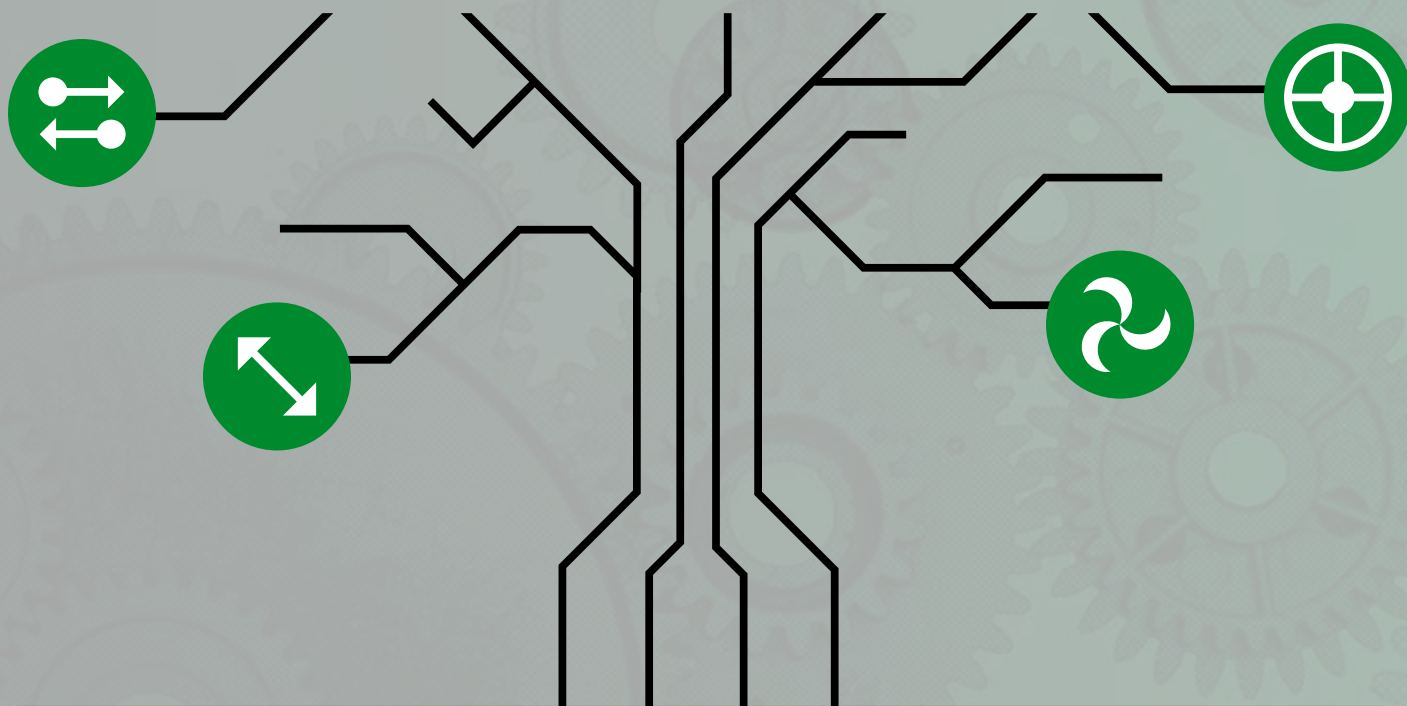

greenMachine Catalog 2022/1
©2022 LYNX Technik AG - Germany
Catalog_greenMachine_2022_Rev4.1_rgb

Introduction

Hardware

GM 6840 2
greenMachine Titan

GM 6825..... 4
greenMachine callisto+

HDR Conversion

HDR Evie+ 6
Real-Time Segmented HDR ► SDR Converter

HDR Static..... 8
Static HDR ◄► SDR Converter

Up/ Down/ Cross Converter

4K UPXD..... 10
12G Up-, Down-, Cross-Converter

3G UPXD 12
Quad 3G Up-, Down-, Cross-Converter

2C UPXD..... 14
Dual Channel 3G Up/ Down/ Cross Converter

Frame Synchronizer

4FS 16
Quad 3G Frame Synchronizer

Bidirectional Transceiver

BiDi 18
Multi Signal Bi-Directional Transport Solution

Test Pattern Generator

Testor..... 20
A/V Test Unit for SDR and HDR

Rack Frames

RFR 6000..... 25
1RU 19" Rack Mount Chassis

RYB 6000 26
yellowbrik mount extension for RFR 6000

RXT 6001..... 27
19" Rack Frame extension for RFR 6000

Accessoires

RPS A100..... 28
Universal AC to DC Power Supply

ABS Case for greenMachine 29

Contact & Service

Knowledge Base
Get in Touch
Warranty Information

Feature Overview

The Concept

With it's standalone, 1RU high /9.5" wide design the greenMachine is fit to be placed and plugged almost anywhere access to a wall plug is given. If you prefer to install it in a rack we offer a wide range of rack building options. Be it:

- RFR 6000: An additional greenMachine in a rack mount tray
- RXT 6001: Holders for power supplies
- RYB 6000: Placement option for up to 6 yellobriks with primary/redundant power, and GPIO

Included Features		HDR Evie+	HDR Evie		HDR Static		4K UPXD	3G UPXD	4FS
			Two modes		Two modes				Quad 3G Channel Mode
			4K UHD Channel Mode	Quad 3G Channel Mode	4K UHD Channel Mode	Quad 3G Channel Mode			
	4K UHD /3G Scaler		—	✓	✓	✓	✓	✓	✓
	Deinterlacer		—	—	✓ Only on Channel 1&2	✓	✓	✓ Only on Channel 1&2	—
	Frame Sync		✓	✓	✓	✓	✓	✓	✓
	3G Level A/B		—	—	✓	✓	✓	✓	✓
	Embedding / Deembedding		✓		✓		✓	✓	✓
	Basic Audio & Video Test Generator		✓	✓	✓	✓	✓	✓	✓
	Audio Processing		✓		✓		✓	✓	✓
	Dolby E® Decoder		—	—	✓		✓	✓	✓
	MADI In/Out		—	—	✓		✓	✓	✓
	MetaData Management		✓		✓		✓	✓	✓
	Video Adjustments		✓	✓	✓	✓	✓	✓	✓
	Color Matching		✓	✓	✓	✓	✓	✓	✓
	Nova Controller		✓		✓		✓	✓	✓
	Timing		✓		✓		✓	✓	✓
	HDR > SDR Conversion		✓	✓	✓	✓	—	—	—
	SDR > HDR Conversion		—	—	✓	✓	—	—	—

Note: Information related to BIDI Transport & Testor can be found later in this document. 2C UPXD is mostly identical to 3G UPXD

greenMachine® | flexibility, done right

The greenMachine design concept

As with all our LYNX-Technik products, we follow a thought-out design philosophy. From our Frame Synchronizer with built-in Metadata management and Image Processing capabilities to our one of a kind, dynamic, segmented HDR to SDR conversion solutions with extensive audio editing and routing capabilities you can expect nothing but the best of German engineering for your AV needs.

The greenMachine itself is incredibly easy to set up. Just install the Lynx Centraal or greenGUI control software on a PC or MAC, connect it via ethernet to the greenMachine, and select your greenMachine from a list of devices in the software. Your greenMachine will automatically detect the input signal formats and display them for you in the input section of the flowchart diagram in the control software.

Physically the greenMachine is designed to have as small a form factor as possible. Clocking in at only 1RU height it just uses half a standard 19" rack in width to process up to four 3G HD signals simultaneously. For its input and output, it has a wide array of SDI in- and outputs, both optical and electrical, supporting formats of up to 12G or 4K UHD SMPTE standards.



What can the greenMachine do for you?

We offer a wide variety of functionalities. From the simple four-channel frame synchronizer, to up/down/cross converter, specialized single fiber transmission solutions, test generators, or the world's first dynamic HDR to SDR down-converter we've left nothing to desire. If, however, you're still missing the right functionality for you, don't hesitate to contact us or our network of dealers to find a solution suitable for you.

We are continuously working on more out of the box solutions to make your work as easy and intuitive as it can be while keeping the professional flexibility we know you need. Reliable, fast, and efficient.

What solutions are available?

The greenMachine packages are toolboxes of core functionalities which, when deployed on a greenMachine, reconfigures that device to have a set processing path of features.

This also allows for the greenmachine to be dynamically switchable.

The following packages are currently available for the greenMachine:

HDR Evie+: Our latest creation, a fully featured, broadcast quality, real-time, segmented, frame by frame HDR to SDR converter, with frame sync and 4K UHD scaler.

HDR Static: A broadcast quality HDR to SDR, SDR to HDR or cross-standard HDR to HDR converter, with a frame sync and up/down/cross converters supporting formats up to 4K UHD (3840x2160).

4K UPXD: A broadcast quality up/down/cross converter with frame sync and 4K UHD scaler supporting formats up to 4K UHD (3840x2160).

3GUPXD: A broadcast quality quad 3G up/down/cross converter and quad scaler with frame sync supporting formats up to 3G-SDI (1920x1080).

2CUPXD: A broadcast quality dual 3G up/down/cross converter and dual Scaler with frame sync supporting formats up to 3G-SDI (1920x1080).

BIDI Transport: A cost-effective bidirectional transport solution that allows transportation of video, audio, Ethernet, and GPI efficiently across two greenMachine Titan hardware devices.

Testor: A video and audio test signal generator supporting 12G (4K UHD), 3G, HD, SD-SDI formats with standard static and dynamic video test patterns with added flexibility that allows users to upload their own user-defined signal patterns.

4FS: A fully featured frame synchronizer for formats up to 3Gbit/s SDI with scaler.

Note: greenMachine comes with extensive audio processing capabilities, but not all packages make use of them. For more information check the individual package page.



GM 6840

greenMachine Titan

titan



Description

greenMachine is an award-winning multi-purpose processing platform that offers many configurations in the form of constellations. Rather than being a fixed application specific box, greenMachine is a combination of general purpose hardware and constellation (pre-defined set of functionalities/features) for reprogrammable functionality and powerful control software. One of the main goals of broadcasters and content providers is to create an immersive experience for the viewers, giving them the feeling of being

part of the viewing content. The 4K standard has now been around for some time providing a high number of pixels on 4K televisions, as well as providing 4K content. Although, watching 4K content on a 4K television may not give the viewer a truly immersive experience. A large number of pixels does not determine the picture quality; color, contrast and brightness are critical too. One key component for an immersive viewing experience is HDR - High Dynamic Range, something quite different from resolution.



Supported SDI Formats


SDTV Formats	525 / 59.94Hz		
	625 / 50Hz		
HDTV Formats	1080i / 50Hz	1080p / 30Hz	720p / 29.97Hz
	1080i / 59.94Hz	1080psf / 23.98Hz	720p / 30Hz
	1080i / 60Hz	1080psf / 24Hz	720p / 50Hz
	1080p / 23.98Hz	1080psf / 25Hz	720p / 59.94Hz
	1080p / 24Hz	720p / 23.98 Hz	720p / 60Hz
	1080p / 25Hz	720p / 24Hz	
	1080p / 29.97Hz	720p / 25Hz	
3G Formats Level A and B	1080p / 50Hz		
	1080p / 59.94Hz		
	1080p / 60Hz		
12G Formats Single Link	3840 x 2160p / 50Hz		
	3840 x 2160p / 59.94Hz		
	3840 x 2160p / 60Hz		
12G Formats Quad Link 2SI Level A and B (4 x 3Gbit/s)	3840 x 2160p / 50Hz		
	3840 x 2160p / 59.94Hz		
	3840 x 2160p / 60Hz		

Technical Specifications

Power	12V DC @ 45W (supports 7 - 24V DC input range)
	2x power connections for redundant power supply
Mechanical	W: 218mm (1/2 19") H: 44mm (1.75") D: 225mm (8.86") - including connectors
	Weight: 1.4kg (3.09lb)
Ambient	Temperature: 5 to 40°C (41 to 104°F)
	Humidity: 90% maximum, non-condensing

Hardware Information


Connections

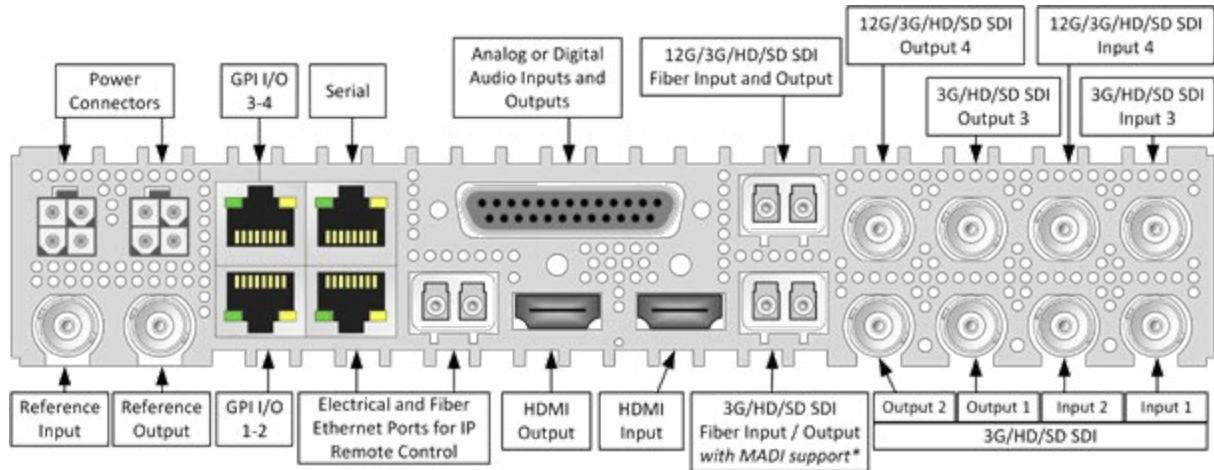

Connection Details

SDI Inputs	3x 3G SDI Video 75 Ohm BNC connector SMPTE 292M, 424M, 259M automatic video format & standard detection	Audio I/O	4x input and 4x output - Sub-D 25 female connector
	Return Loss: >15dB from 5MHz to 1.5GHz >10dB from 1.5GHz to 3GHz Automatic cable EQ (Belden 1694A): 340m@270Mbit/s, 150m@1.5Gbit/s, 110m@2.97Gbit/s		Analog: Input impedance >10k Ohm Output Impedance 150 Ohm Analog I/O full scale level: selectable 12, 15, 18, 20, 22, 24 dBu Digital: AES3 balanced transformer isolated; Digital output level: 4V peak to peak nom
SDI Outputs	1x 12G SDI Video 75 Ohm BNC connector SMPTE 292M, 424M, 259M, 2081, 2082 automatic video format & standard detection	Optical I/O (Optional)	1x 3G SDI SFP Transceiver SMPTE 297M - 2006 1x 12G SDI SFP Transceiver SMPTE 292M, 424M, 2081 2082 no SD SDI (270Mbit)
	Return Loss: same as 3G SDI; >7dB to 6GHz; >4dB to 12GHz		
HDMI I/O	1x input and 1x output - 10 bit HDMI 4K/UHD 1.4b	Ethernet (LAN)	1x 10/100/1000 BaseT RJ45 Connector
		Optical Ethernet (Optional)	IEEE 802.3z 1000Base-X Gbit/s Ethernet over Fiber at 1 Gbit/s (125 Mbit/s)
		Reference Input	1x analog video reference 75 Ohm BNC connector Auto detect: Analog bi-level (SDTV) or tri-level (HDTV)
		Reference Output	1x analog video reference 75 Ohm BNC connector Analog bi-level (SDTV) or ri-level (HDTV) cross lock capability
		GPI I/O	1x RJ45 Connector 4x general purpose inputs 4x general purpose outputs
		Serial Data	EIA/ETA RS232C / RS422 / RS 485 (selectable through greenGUI) RJ45 connector ESD protection for up to 16kV

UART Pinout



RS-232	Uncrossed	Crossed	RS-422	Uncrossed	Crossed
D1	NC	GND	D1	GND	NC
D2	NC	GND	D2	GND	NC
D3	CTS (in)	RTS (out)	D3	TX_B (-)	RX_B (-)
D4	RX (in)	TX (out)	D4	RX_B (-)	TX_B (-)
D5	RTS (out)	CTS (in)	D5	RX_A (+)	TX_A (+)
D6	TX (out)	RX (in)	D6	TX_A (+)	RX_A (+)
D7	GND	NC	D7	NC	GND
D8	NC	GND	D8	GND	NC

Note:

Pinout in table is pinout of RJ-45 greenMachine serial port. Pinout can be changed between Uncrossed and Crossed in the greenGUI.

GM 6825

greenMachine callisto+




Description

The greenMachine callisto+ platform provides for simultaneous processing of up to two individual SD/HD/3G SDI signals. The hardware itself is a powerful general-purpose audio and video processing appliance that can perform many different functions using one of the available greenMachine configurations (constellations), i.e. 2CUPXD.

The user can select and license just the constellation, or multiple constellations required at the point of order and can switch between these licensed constellations at any time. Additionally, they may purchase

licenses for additional constellations in the future. As all constellations are pre-installed, unlicensed constellations can be deployed for testing and proof of system concept but will show watermarks at the outputs.

Fiber SFP options are available for one SD/HD/3G SDI input and output. The Nova controller (full remote control) is included in the basic framework.

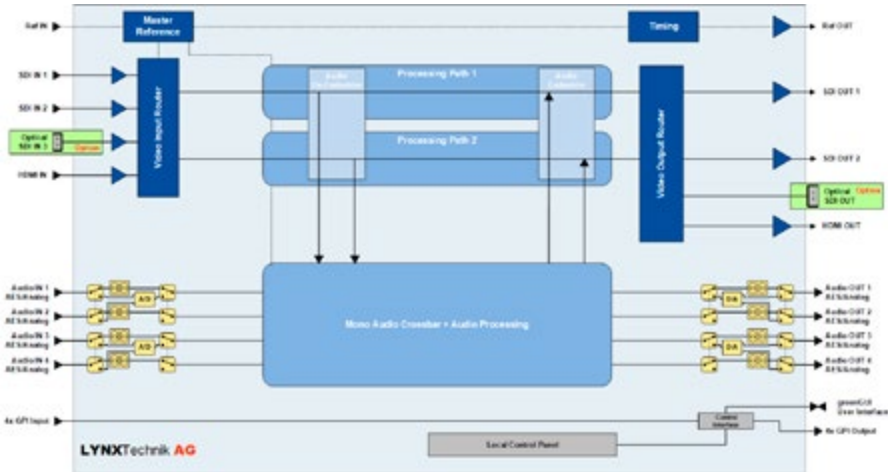

Features

- 2x 3G general purpose A/V processing appliance
- Internal input and output signal routers
- Compatible with available greenMachine callisto+ constellations
- Integrated control panel with color display for live image monitoring, audio level meters, status indication and menu driven control interface
- Small footprint: 1RU high x half 19" rack width
- 2x electrical SD/HD/3G SDI inputs. Level A and B DL
- 2x electrical SD/HD/3G SDI outputs. Level A and B DL
- 1x HDMI input (1.4b) and 1x HDMI output (1.4b) up to 3G
- 1x Analog reference input and output (bi-level or tri-level sync)
- 1x Electrical LAN I/O connection
- 4x Balanced analog audio or digital AES Audio inputs
- 4x Balanced analog audio or digital AES Audio outputs
- 4x GPI inputs and 4x GPI outputs
- 1x Optional SDI fiber I/O (basic fiber or CWDM): SD/HD/3G
- 1x Optional Ethernet LAN fiber connection (basic or CWDM)
- Optional redundant power protection
- Optional 19" rack frame
- Nova controller included: Full remote control using greenGUI control software
- Full SNMP V2 support

Supported SDI Formats


SDTV Formats	525 / 59.94Hz		
	625 / 50Hz		
HDTV Formats	1080i / 50Hz	1080p / 30Hz	720p / 29.97Hz
	1080i / 59.94Hz	1080psf / 23.98Hz	720p / 30Hz
	1080i / 60Hz	1080psf / 24Hz	720p / 50Hz
	1080p / 23.98Hz	1080psf / 25Hz	720p / 59.94Hz
	1080p / 24Hz	720p / 23.98Hz	720p / 60Hz
	1080p / 25Hz	720p / 24Hz	
	1080p / 29.97Hz	720p / 25Hz	
3G Formats	1080p / 50Hz		
Level A and B	1080p / 59.94Hz		
	1080p / 60Hz		

Technical Specifications

Power	12V DC @ 45W (supports 7 - 24V DC input range)
	2x power connections for redundant power supply
Mechanical	W: 218mm (19.5"), H: 44mm (1.75"), D: 225mm (8.86") - including connectors
	Weight: 1.28kg (2.82lb)
Ambient	Temperature: 5 to 40°C (41 to 104°F)
	Humidity: 90% maximum, non-condensing

Hardware Information


Connections

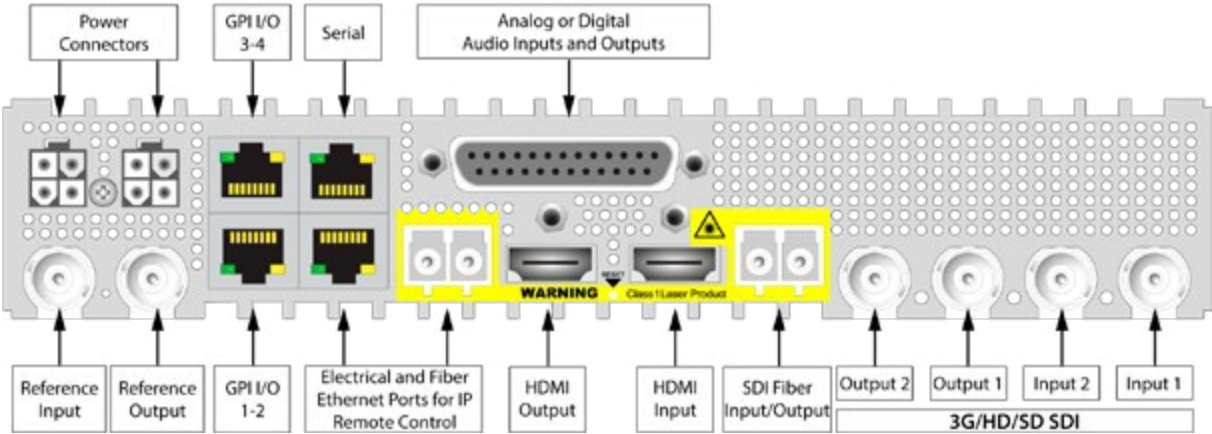

Connection Details

SDI Inputs	2x 3G SDI video on 75 Ohm BNC connector - SMPTE, 292M, 424M, 259M with automatic video format and standard detection	Optical Ethernet (Optional)	IEEE 802.3z 1000Base-X Gbit/s Ethernet over Fiber at 1Gbit/s (125 MBit/s)
	Return Loss: >15dB from 5MHz to 1.5GHz, >10dB from 1.5GHz to 3GHz		
	Automatic cable EQ (Belden 1694A): 340m@270Mbit/s, 150m@1.5Gbit/s, 110m@2.97Gbit/s		
SDI Output	Analog bi-level (SDTV) or ri-level (HDTV), cross lock capability	GPI I/O	• 4x general purpose inputs (RJ45 Connector) • 4x general purpose outputs (RJ45 Connector)
	Timing jitter: < 0.2 UI @ 270Mbit/s, < 1.0 UI @ 1.5Gbit/s, < 2.0 UI @ 2.97Gbit/s		
	Alignment jitter: < 0.2 UI @ 270Mbit/s, < 0.2 UI @ 1.5Gbit/s, < 0.3 UI @ 2.97Gbit/s	Reference Input	• 1x analog video reference on 75 Ohm BNC connector • Analog bi-level (SDTV) or tri-level (HDTV) auto detect
	Return Loss: >15dB from 5MHz to 1.5GHz, >10dB from 1.5GHz to 3GHz		• 1x analog video reference on 75 Ohm BNC connector
HDMI	• 1x Input 10 bit HDMI 1.4b (up to 3G) • 1x Output 10 bit HDMI 1.4b (up to 3G)	Serial Data	EIA/ETA RS232C / RS422 / RS 485 (selectable through greenGUI) - RJ45 connector ESD protection for up to 16kV
Ethernet (LAN)	1x 10/100/1000 BaseT RJ45 Connector	Audio I/O	4x input and 4x output on Sub-D 25 female connector Analog: input impedance >10k Ohm, Output Impedance 150 Ohm Analog I/O full scale level: selectable 12, 15, 18, 20, 22, 24 dBu Digital: AES3 balanced transformer isolated; Digital output level: 4V peak to peak nom 64 channel MADI supported on selected constellations (optional MADI SFP required for this)
Optical I/O (Optional)	1x 3G SDI SFP Transceiver (SMPTE 297M - 2006)		

UART Pinout



RS-232	Uncrossed	Crossed	RS-422	Uncrossed	Crossed
D1	NC	GND	D1	GND	NC
D2	NC	GND	D2	GND	NC
D3	CTS (in)	RTS (out)	D3	TX_B (-)	RX_B (-)
D4	RX (in)	TX (out)	D4	RX_B (-)	TX_B (-)
D5	RTS (out)	CTS (in)	D5	RX_A (+)	TX_A (+)
D6	TX (out)	RX (in)	D6	TX_A (+)	RX_A (+)
D7	GND	NC	D7	NC	GND
D8	NC	GND	D8	GND	NC

Note:
Pinout in table is pinout of RJ-45 greenMachine serial port. Pinout can be changed between Uncrossed and Crossed in the greenGUI.



Description

The greenMachine HDR Evie+ (Enhanced Video Image Engine), 1 RU half 19" rackmount, is a real-time segmented frame-by-frame broadcast-quality High Dynamic Range (HDR) to Standard Dynamic Range (SDR) converter, with frame sync supporting formats up to 4K UHD (3840x2160). It is the world's first system that uses the advanced algorithm for sectional dynamic tone mapping which automatically analyzes different sections of an image in HDR stream and applies optimal corrections on a frame by frame basis in real-time. This unique capability is unlike any other solution today and is the perfect real-time production tool for sports or any live broadcast event needing high-quality real-time HDR to SDR conversions.

Features

Operation Modes

- 4K UHD single channel configuration
- 3G HD quad channel configuration

Sectional Dynamic HDR Down-Conversion

Input Transfer Characteristics

PQ ST-2084, PQ BT-2100, HLG, Sony SLog3, Arri LogC, Red Log3G10, BMD Film, Panasonic V-Log, Canon C-Log2

Output Transfer Characteristics

Standard Dynamic Range (SDR)

Colorimetry Supported

Input Colorimetry

BT.2020, BT.709, Sony S-Gamut, ACES, DCI-P3, Panasonic V-Gamut, BMD Film, Canon Cinema Gamut, Arri Alexa, Red Wide Gamut

Output Colorimetry

BT.2020, BT. 709

Color Processing

- RGB gain and offset adjustment
- CMYK gain and offset adjustment

Input / Output Data Range

- Full range : Video signal representation (10bits) in full range of values from 0 to 1023 decimal (according to ITU BT 2100)
- Narrow range : Traditional video signal (10 bits) representation from 64 to 940 decimal values

Ordering Information

greenMachine Package		EAN				
GMPT HDREVIE+ (N/EU/US/UK)	1 x 4k / 4 x 3G Static HDR<>SDR converter (H/W & License)		4250479327870	Includes	GMC-HDR-EVIE+-titan:	HDR EVIE+ Constellation Software License
	Power plug Variants (please specify when ordering)					
	GMPT HDREVIE N	Power supply without Plug				
	GMPT HDREVIE EU	Power Supply with EU Plug			GM 6840:	greenMachine titan Processors
	GMPT HDREVIE US	Power Supply with US Plug			RPS A100:	Primary Power Supplies with Region Specific Power Cord
	GMPT HDREVIE UK	Power Supply with UK Plug				
License Only (no hardware included)						
GMC- HDREVIE+-titan	greenMachine titan HDR Evie+ constellation: 1 x 4k / 4 x 3G Static HDR to SDR converter		4250479326118			

HDR EVIE+ fits best in the single native HDR workflow reducing cost on equipment and manual operations.

HDR EVIE+ provides 1x 4K/UHD processing channel supporting down-conversion from HDR transfer characteristics to SDR through appropriate sectional dynamic tone mapping. It also supports Wide Color Gamut (WCG) needs of broadcasters, and professional AV live events requirement. HDR Evie+ package also includes HDR Static configuration for Static HDR <=> SDR conversions, which performs static tone mapping to realize UP/Down/ Cross conversions between HDR and SDR, suited best for the studios or the environments where the light conditions do not change dynamically.

Dynamic Processing

- Local Dynamic to Global Dynamic Ratio engine allows a user to mix sectional tone mapping and global tone mapping proportionally
- Global Dynamic to Static Ratio engine allows a user to mix dynamic tone mapping and static tone mapping proportionally
- Dynamic adaptation speed engine (frame-by-frame) allows a user to adjust tone mapping calculation speed to get smooth and consistent viewing impression
- Automated Scene Detection engine allows a user to adjust the parameter that detects a scene change for automated adjustment of image brightness levels
- User-adjustable target brightness, contrast, and saturation

Other included features


- Frame Synchronizer
- Embedding /De-embedding with DolbyE™ embedding support
- Basic Audio & Video Test Generator
- Audio Processing with gain adjustment, mute, inversion, and stereo to mono mix-down
- MetaData Management
- Video Adjustment include saturation, gain, black and hue adjustment
- Color matching
- Timing with available video and audio delay per channels is 30 frames and 1.3 seconds respectively
- Nova controller with full SNMP v2 support and custom control

Package includes HDR Static*


*The greenMachine hardware will support only one configuration at a time. It can be either be used in HDR Evie+ configuration or HDR Static configuration.

Functional Diagrams

Single Channel 4K UHD

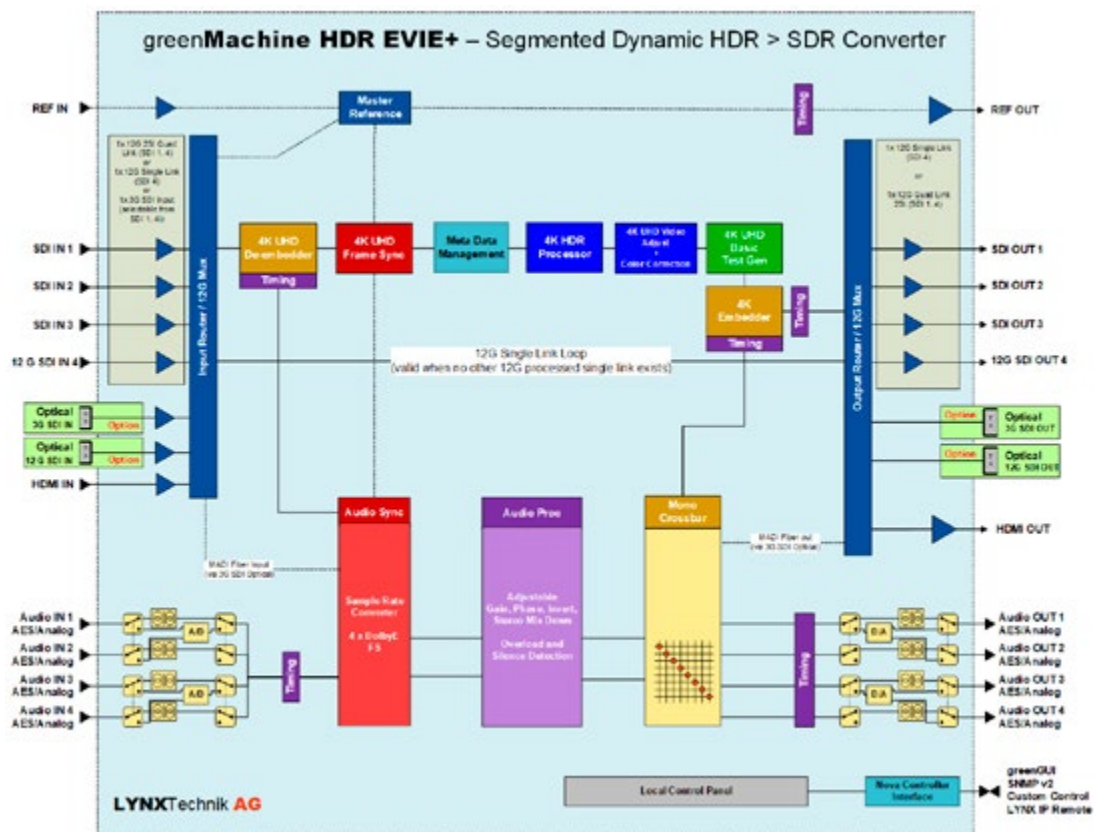

Quad Channel 3G

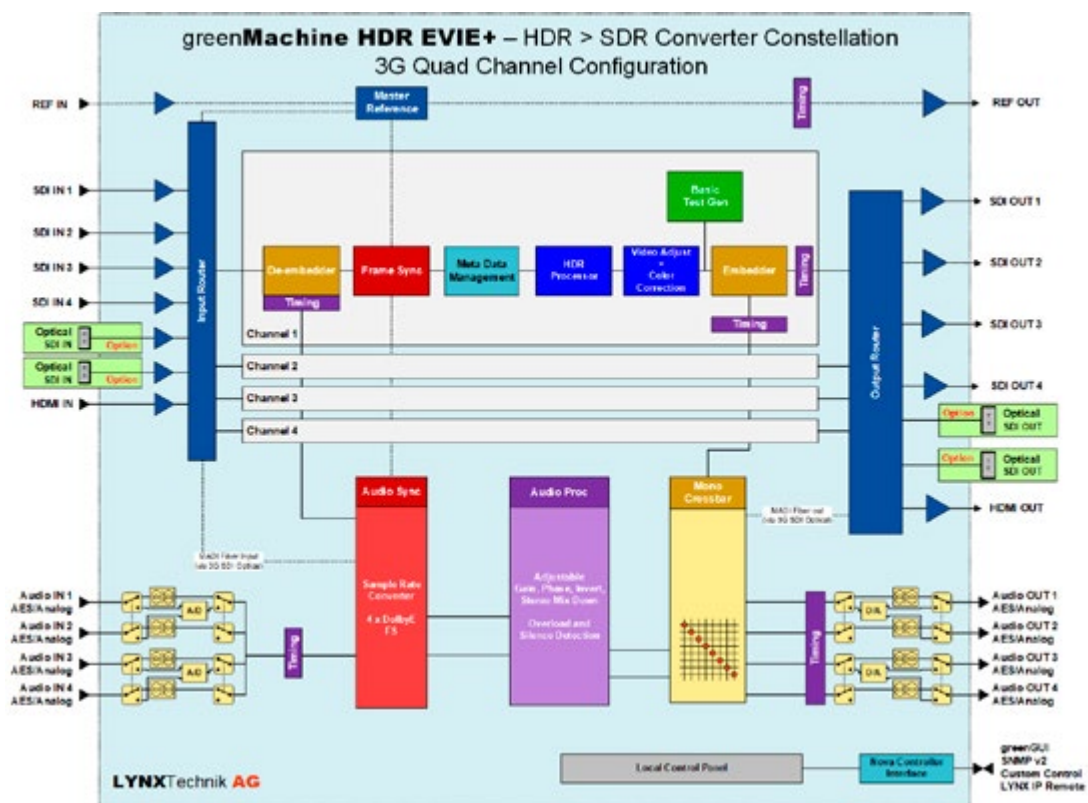

HDR Static

Static HDR◀▶SDR Converter

titan
callisto
Racks



Description

The greenMachine HDR Static, 1 RU half 19" rackmount, is a real-time broadcast-quality HDR to SDR, SDR to HDR or cross-standards HDR to HDR converter with frame sync supporting formats up to 4K UHD (3840x2160). HDR Static applies color and contrast parameters equally throughout a specific piece of content, i.e. an average brightness/color range is determined across an entire program.

HDR Static greenMachine processor has an advanced algorithm that overcomes the issues arising from "round-tripping" SDR>HDR>SDR. The SDR signal at the production end and the distribution end of the round

trip are visually identical making the whole SDR▶HDR▶SDR conversion process transparent. Supporting 4 x 3G or 1x 4K/UHD processing channel, HDR Static provides up, down and cross-conversions in HDR and SDR curves through appropriate static tone mapping. It also supports Wide Color Gamut (WCG) needs of broadcasters, and professional AV live events requirement. HDR Static is most suitable for the environments outdoor/indoor where the light conditions does not change dynamically. For dynamically changing lighting conditions, check greenMachine HDR Evie.

Features

Static HDR <> SDR Conversion

Input Transfer Characteristics	PQ ST-2084, HLG, Sony SLog3, SDR
Output Transfer Characteristics	PQ ST-2084, HLG, Sony SLog3, SDR

Colorimetry Supported

Input Colorimetry	BT.2020, BT.709
Output Colorimetry	BT.2020, BT. 709

Operation Modes

- 3G Quad channel configuration
- 4K UHD single channel configuration

Color Processing

- RGB gain and offset adjustment
- CMYW gain and offset adjustment

Input / Output Data Range

- Full range : Video signal representation (10bits) in full range of values from 0 to 1023 decimal (according to ITU BT 2100)
- Narrow range : Traditional video signal (10 bits) representation from 64 to 940 decimal values

Other included features


- Frame Synchronizer
- 4K UHD / 3G Scaler
- Deinterlacer: one deinterlacer in 4K mode and two deinterlacers on the first two channels in quad 3G mode
- Embedding /De-embedding with DolbyETM embedding support
- Basic Audio & Video Test Generator
- Audio Processing with gain adjustment, mute, inversion, and stereo to mono mix-down
- Two Dolby E® Decoder for decoding 8 audio channels in a Dolby E® stream
- MADI input and output
- MetaData Management
- Video Adjustment include saturation, gain, black and hue adjustment
- Color matching
- Timing with available video and audio delay per channels is 30 frames and 1.3 seconds respectively
- Nova controller with full SNMP v2 support and custom control

Ordering Information


greenMachine Package					EAN
Includes	GM 6840:	greenMachine titan Processors	GMPT HDRS (N/EU/US/UK)	1 x 4k / 4 x 3G Static HDR<->SDR converter (H/W & License) Power plug Variants (please specify when ordering) GMPT HDRS N Power supply without Plug GMPT HDRS EU Power Supply with EU Plug GMPT HDRS US Power Supply with US Plug GMPT HDRS UK Power Supply with UK Plug	4250479327863
	RPS A100:	Primary Power Supplies with Region Specific Power Cord			
	GMC-HDR-STATIC-titan:	4K Up/Down/Cross Converter Constellation License			
License Only (no hardware included)					
	GMC-HDR-STATIC-titan	1 x 4k / 4 x 3G Static HDR to SDR converter constellation			4250479326118

Functional Diagrams

Single Channel 4K UHD

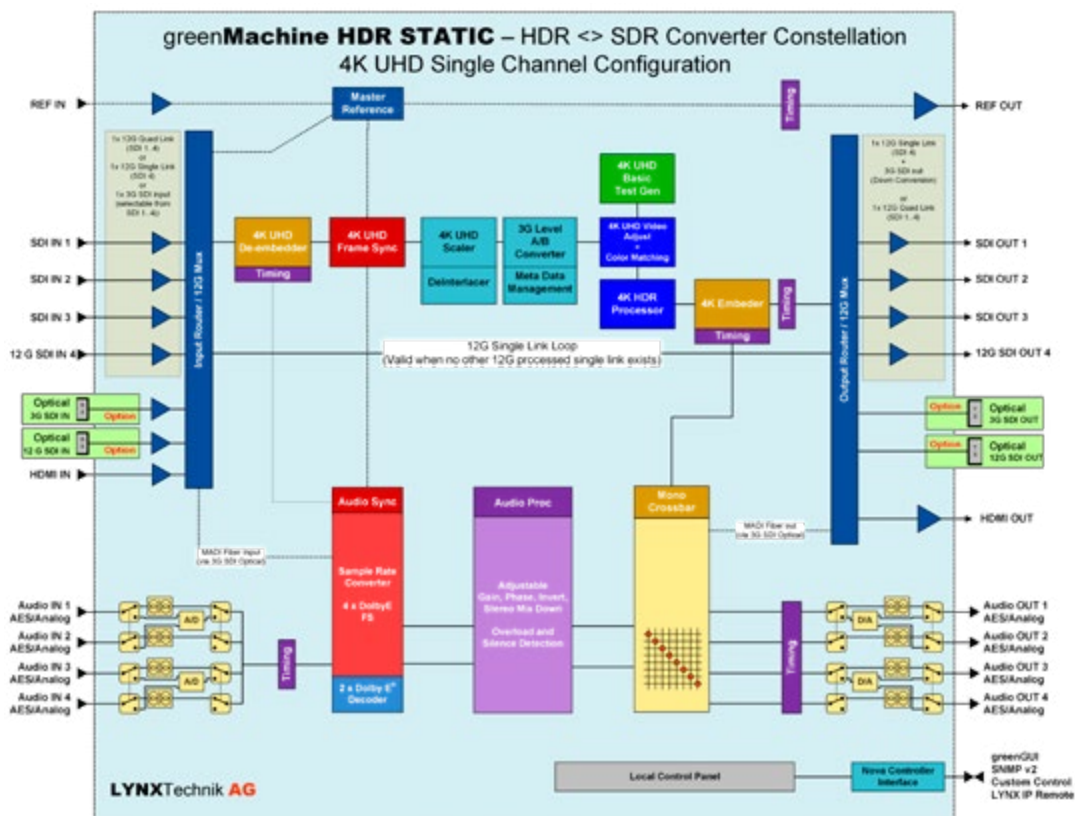

Quad Channel 3G

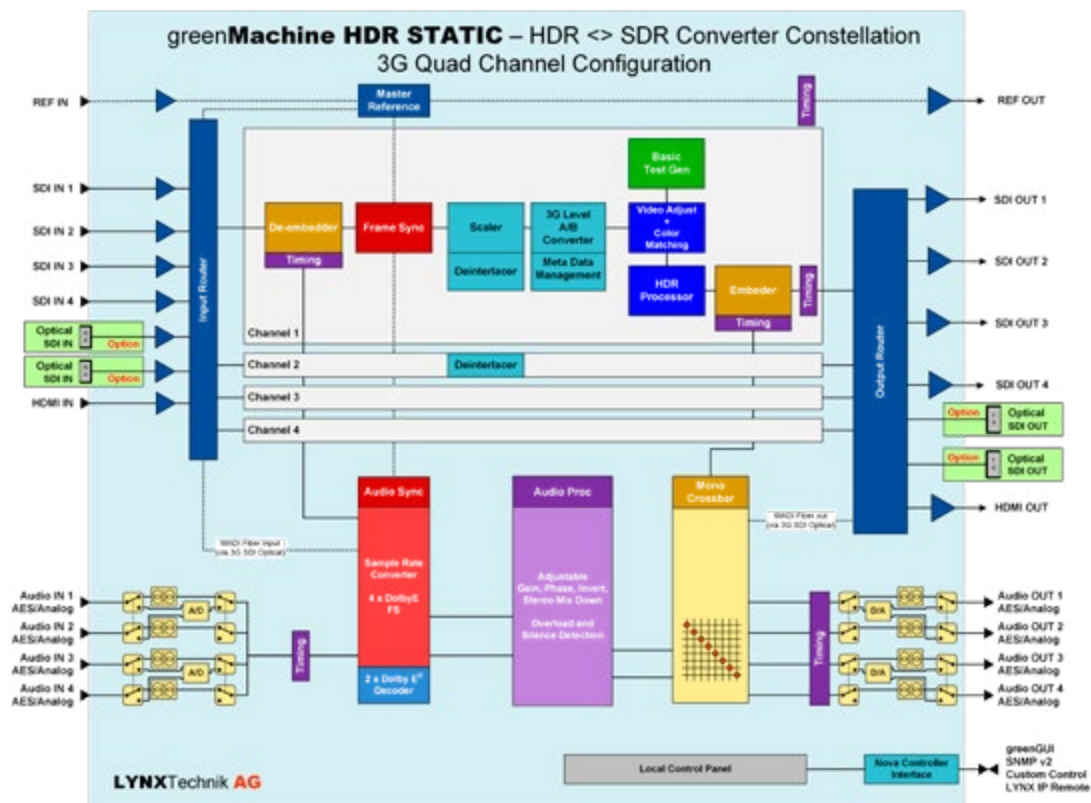

4K UPXD

12G Up-, Down-, Cross-Converter



4K UPXD

Single Channel 12G Up/Down/Cross Converter

Description

The greenMachine 4KUPXD is a broadcast-quality video processing unit that has a single channel up/down/cross converter with a frame synchronizer supporting formats up to 4K UHD (3840 x 2160). It includes full audio processing capabilities, scalars for the spatial conversion of the video signals including versatile region of interest (ROI) selection, and high-performance deinterlacer.

It also supports 4x3G (2SI Quad link) or 12G SDI (single link) inputs and outputs for 4K UHD signals. With 2SI quad-link <> single link conversion,

signals can be interchanged in between the single link and 2SI quad links. The greenMachine 4KUPXD system comes with a fully-featured local control interface with LCD which displays image previews and audio level meters of the processed video paths in addition to the graphical user interface called greenGUI. It is also supported by the Nova controller which enables the module to be remotely controlled and monitored via third party master control software.

Features


Processing Path	1x12G 4K UHD with 2SI quad-link <>single link conversion.	Dolby E® decoder	- Two Dolby E decoders can be used to decode all 8 channels contained in a Dolby E stream. - Dolby metadata can be mapped to VANC acc. to SMPTE 2020-3 and SMPTE 2020-2.
4K/3G-Scaler	A spatial converter with a powerful region of interest (ROI) selection and scaling. Conversion Mode supported: - Pillar box/Letterbox - Center cut, 14:9 conversion - stretch to fill - Custom ROI	MADI in/out	Incoming MADI signals are routed to the internal audio crossbar. Outgoing MADI signal can be completely re-arranged in the internal audio crossbar.
Deinterlacer	Broadcast/quality deinterlacing for incoming interlaced SD and HD video formats and applies motion adaptive filtering resulting in superb image quality.	Audio Processing	It provides gain adjustment, mute, inversion, and stereo to mono-mix on each mono audio channel including silence and overload monitoring. It has a 1kHz test signal as well.
Motion adaptive filtering	Motion adaptive filtering allows deinterlacer to create a sequence of output frames at the same rate as the sequence of input fields eliminating feathering or flickering artifacts. Only available on channel 1 & 2.	3G level A/B	It provides automatic detection of 3G level A/B and allows 3G level A <> 3G level B dual-link conversion. (3G level A acc. to SMPTE ST425-1/4:2:2, 10Bit)
Frame Synchronizer	One of the best synchronizers in the industry utilizing the external reference with a robust "flywheel" function for the synchronization of SDI sources. All embedded audio is extracted and delayed automatically to match the video processing delay, then embedded via a matrix into the SDI output.	Embedder/ De-embedder:	Multi-format audio embedder and de-embedder providing access to all the channels in the input SDI and allows shuffling and embedding them to the output(s). Can also embed DolbyE™ signals which in conjunction with the frame synchronizer will always maintain the guard band. Also possible to incorporate separate AES and/or analog audio inputs and outputs.
Metadata Management	Manages the embedded metadata in the video signals. Time code, Closed captions and Teletext can be monitored and/or converted.	Basic Audio & Video Test generator	Wide range of test patterns. Can be configured to work in conjunction with the frame synchronizer to output a test pattern on TRS errors.
Video Adjustment	Includes saturation, gain black and hue adjustments, blanking interval deletion and aperture correction. Also provides a horizontal flip and YCrCb headroom clipping functionality.	Timing	Each video and AES audio channel can be individually delayed. Available video delay per channel is 30 frames, audio delay is 1.3 second per AES audio channel.
Color Matching	Provides adjustment in gain and offset for red, green and blue (RGB) and cyan, magenta, yellow, and white (CMYW).	Nova Controller	Full SNMP v2 along with LYNX IP remote control protocol functionality. Enables CustomControl feature that allows users to design customized control panels for a workstation, giving specific user simplified controls.

Application Examples & Functional Diagram

Application Examples



Functional Diagram - Single Channel 4K UHD

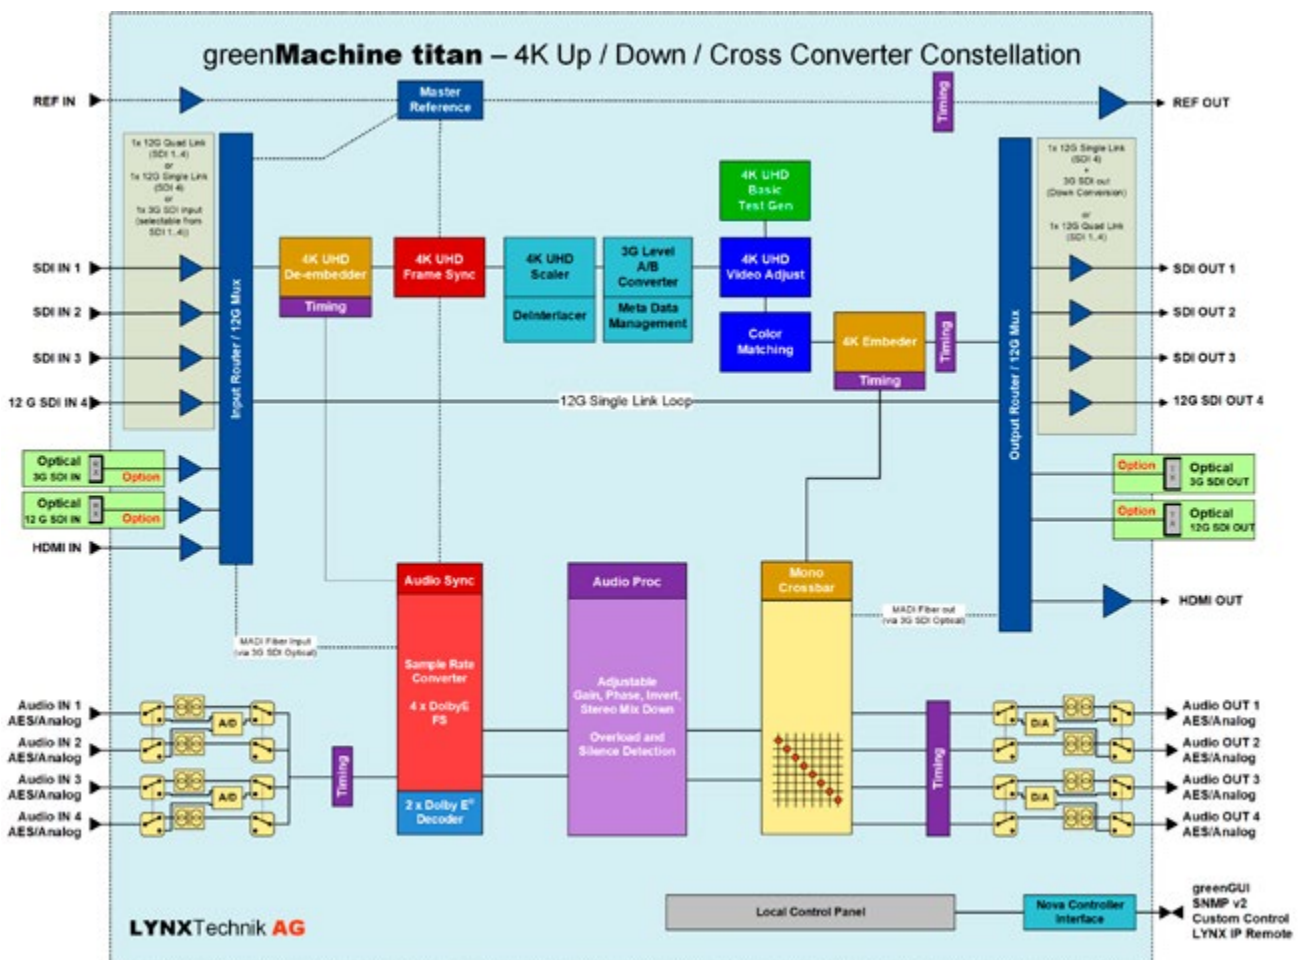

Ordering Information

greenMachine Package		
Includes	GM 6840:	greenMachine titan Processors
	RPS A100:	Primary Power Supplies with Region Specific Power Cord
	GMC-4KUPXD:	4K Up/Down/Cross Converter Constellation License
GMPT 4KUPXD (N/EU/US/UK)	4k Up/Down/Cross-converter + Frame Synchronizer (H/W & License) Power plug Variants (please specify when ordering) GMPT 4KUPXD N Power supply without Plug GMPT 4KUPXD EU Power Supply with EU Plug GMPT 4KUPXD US Power Supply with US Plug GMPT 4KUPXD UK Power Supply with UK Plug	EAN: 4250479327887
License Only (no hardware included)		
GMC-4KUPXD	greenMachine titan 4KUPXD constellation: 4K Up/Down/Cross Converter	EAN: 4250479326064

3G UPXD**Quad 3G Up-, Down-, Cross-Converter****3G UPXD**

Quad Channel 3G Up/Down/Cross Converter

Description

The greenMachine 3GUPXD is a broadcast-quality video processing unit that has a quad-channel up/down/cross converter with frame synchronizer supporting formats up to 3G-SDI (1920 x 1080) per channel. It includes full audio processing capabilities, scalars for the spatial conversion of the video signals including a versatile region of interest (ROI) selection and high-performance deinterlacers on two processing channels.

The greenMachine 3GUPXD provides 4x3G processing channels with

independent embedder & de-embedder, audio processing, Dolby E® decoding, color matching and many more features on each channel. It comes with a fully-featured local control interface with LCD which displays image previews and audio level meters of the processed video paths in addition to the graphical user interface called greenGUI. It is also supported by the Nova controller which enables the module to be remotely controlled and monitored via third party master control software.


Features

Processing Path	Four independent 3G processing paths (4x3G)
3G Scaler	A spatial converter with a powerful region of interest (ROI) selection and scaling. Conversion Mode supported: • Pillar box/Letterbox • Center cut, • 14:9 conversion • stretch to fill • Custom ROI
Deinterlacer	Deinterlace SD & HD video formats on channel 1 & 2
Motion adaptive filtering	Motion adaptive filtering allows deinterlacer to create a sequence of output frames at the same rate as the sequence of input fields eliminating feathering or flickering artifacts.
Frame Synchronizer	Proprietary "flywheel" function uses external reference for reliable and dynamic synchronization of SDI sources Extracts embedded audio and re-embeds with delay to automatically match the internal video processing delay
Metadata Management	Manage embedded metadata, including: Time code, Closed captions and Teletext
Video Adjustment	• Saturation, black gain, and hue adjustments • Blanking interval deletion and aperture correction • YCrCb headroom clipping functionality • Horizontal flip
Color Matching	Adjust gain and offset for: • red, green and blue (RGB) • cyan, magenta, yellow, and white (CMYW)
DolbyE® Decoder	Two DolbyE® decoders can decode all 8 channels contained in a DolbyE® stream Dolby metadata can be mapped to VANC acc. to SMPTE 2020-3 and SMPTE 2020-2


MADI in/out	Rerout in internal Crossbar: • Incoming MADI signal • Outgoing MADI signal
Audio Processing	Gain adjustment, mute, inversion, and stereo to mono-mix on each mono audio channel. Includes silence and overload monitoring, as well as 1kHz test signal
3G level A/B	• Automatic detection of 3G level A/B • 3G level A <> 3G level B dual-link conversion (3G level A acc. to SMPTE ST425-1/4:2:2, 10Bit)
Embedder/De-embedder:	Multi-format audio embedder and de-embedder with access to all channels in the input SDI Allows shuffling and embedding the output(s) Embed DolbyE® signals which in conjunction with the frame synchronizer always maintain the guard band Possible to incorporate separate AES and/or analog audio in/outputs
Basic Audio & Video Test generator	Wide range of test patterns. Can be configured to work in conjunction with the frame synchronizer to output a test pattern on TRS errors.
Timing	Video and AES audio channel can be individually delayed Available video delay per channel is 30 frames, audio delay is 1.3 second per AES audio channel.
Nova Controller	Full SNMP v2 along with LYNX IP remote control protocol functionality. Enables CustomControl feature that allows users to design customized control panels for a workstation, giving specific user simplified controls.

Application Example & Functional Diagram

Application Example

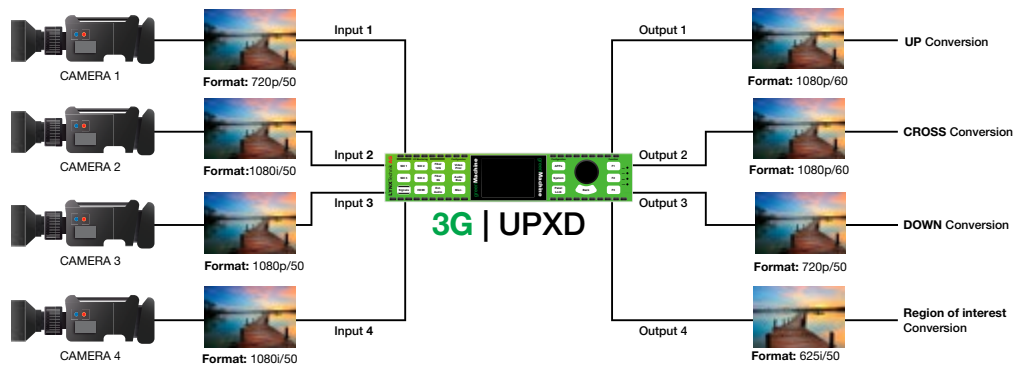

Functional Diagram - Quad Channel 3G

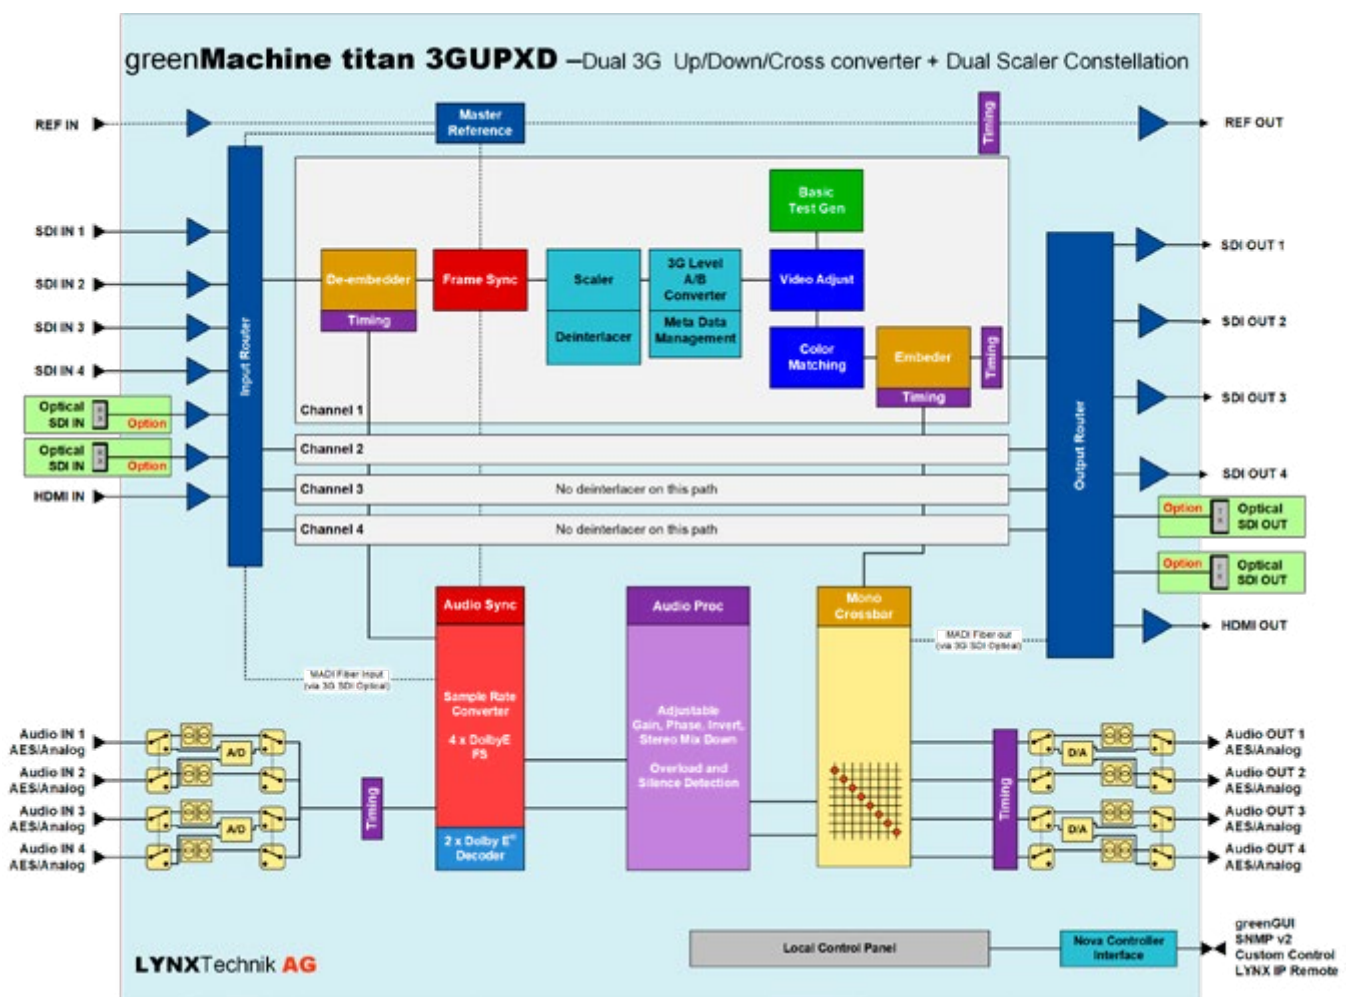

Ordering Information

greenMachine Package		
Includes	GM 6840:	greenMachine titan Hardware
	RPS A100:	Primary Power Supplies with Region Specific Power Cord
	GMC-3GUPXD:	Testor Constellation Software License
GMPT 3GUPXD (N/EU/US/UK)	Dual 3G Up/Down/Cross Converter + Dual Scaler (Hardware & License) Power plug Variants (please specify when ordering) GMPT 3GUPXD N Power supply without Plug GMPT 3GUPXD EU Power Supply with EU Plug GMPT 3GUPXD US Power Supply with US Plug GMPT 3GUPXD UK Power Supply with UK Plug	EAN: 4250479327894
License Only (no hardware included)		
GMC-3GUPXD	greenMachine titan 3GUPXD constellation: Dual 3G Up/Down/Cross Converter + Dual Scaler	EAN: 4250479326101

2C UPXD**Dual Channel 3G Up/ Down/ Cross Converter****Description**

The greenMachine 2CUPXD is a broadcast-quality video processing unit that has a dual-channel up/down/cross converter with frame synchronizer supporting formats up to 3G-SDI (1920 x 1080) per channel. It includes full audio processing capabilities, scalars for the spatial conversion of the video signals including a versatile region of interest (ROI) selection and high-performance deinterlacers on the two processing channels.

A greenMachine callisto+ with the 2CUPXD constellation deployed also provides two processing channels with independent **audio embedder**


& de-embedder, audio processing, Dolby E® decoding, color correction and many more features. It comes with a fully-featured local control interface with LCD which displays image previews and audio level meters of the processed video paths in addition to the graphical user interface called greenGUI. It is also supported by the Nova controller which enables the module to be remotely controlled and monitored via third party master control software.

Features


Processing Channels:	Two independant 3G processing paths (2x3G)	Embedder/ De-embedder:	A multi-format audio embedder and de-embedder provide access to all the channels in the input SDI and allow shuffling and embedding them to the output(s).
3G Scaler:	A spatial converter with a powerful region of interest (ROI) selection and scaling. Conversion Mode supported: • Pillar box/Letterbox • Center cut, • 14:9 conversion • stretch to fill • Custom ROI	Audio Processing:	It provides gain adjustment, mute, inversion, and stereo to mono-mix on each mono audio channel including silence and overload monitoring. It has a 1khz test signal as well.
Deinterlacer:	Deinterlace SD & HD video formats on both channels	Dolby E® decoder:	Two Dolby E® decoders can be used to decode all 8 channels contain in a Dolby E® stream. The Dolby® metadata can be mapped to VANC acc. to SMPTE 2020-3 and SMPTE 2020-2.
Motion adaptive filtering:	Motion adaptive filtering allows deinterlacer to create a sequence of output frames at the same rate as the sequence of input fields eliminating feathering or flickering artifacts.	MADI in/out:	This constellation fully supports MADI, if the greenMachine is equipped with an optionally available MADI SFP. All incoming and outgoing MADI signals have internal audio processing and are connected to the internal audio matrix and can be rearranged.
3G level A/B:	It provides automatic detection of 3G level A/B and allows 3G level A <> 3G level B dual-link conversion. (3G level A acc. to SMPTE ST425-1/4:2:2, 10Bit)	Basic Audio & Video Test Generator	The test generator is a basic audio & video test signal generator with a wide range of still video test patterns. It can be configured to work in conjunction with the Frame Synchronizer to output a test pattern on TRS errors.
Frame Synchronizer:	Proprietary "flywheel" function uses external reference for reliable and dynamic synchronization of SDI sources Extracts embedded audio and re-embeds with delay to automatically match the internal video processing delay	Timing	Each video and audio (AES and MADI) channel can be individually delayed. The available video delay per channel is 30 frames and the audio delay is 1.3 second per AES audio channel.
Metadata Management:	This functionality manages the embedded metadata in the video signals. Time code, Closed captions, and Teletext can be monitored and/or converted.	greenGUI	greenGUI is a control software that provides remote control and status monitoring and event (error) reporting for all the greenMachines installed on a network.
Video Adjustment:	It includes saturation, gain black and hue adjustments, blanking interval deletion and aperture correction. It also provides a horizontal flip and YCrCb headroom clipping functionality.	Nova Controller	Adds full SNMP v2 along with LYNX IP remote control protocol functionality to the system. It enables CustomControl feature that allows users to design customized control panels for a computer, giving specific simplified user-specific controls.
Color correction:	It allows adjustments in gain, offset, lift, and gamma for Red, Green, and Blue (RGB). It also provides gain and offset adjustments for Cyan, Magenta, Yellow, and White (CMYW).		

Application Example & Functional Diagram

Application Example

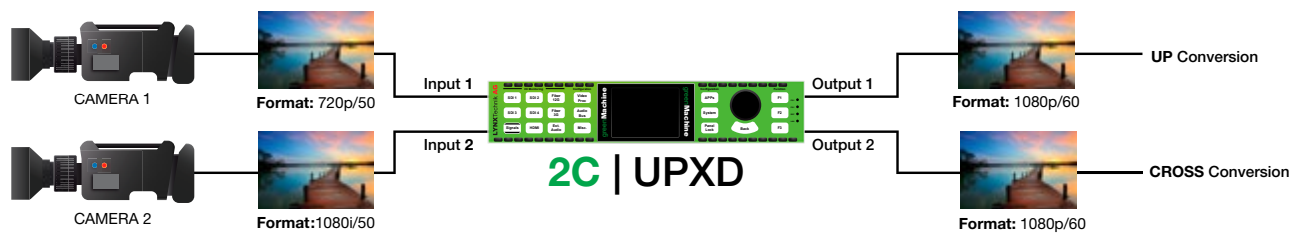

Functional Diagram: Dual Channel 3G

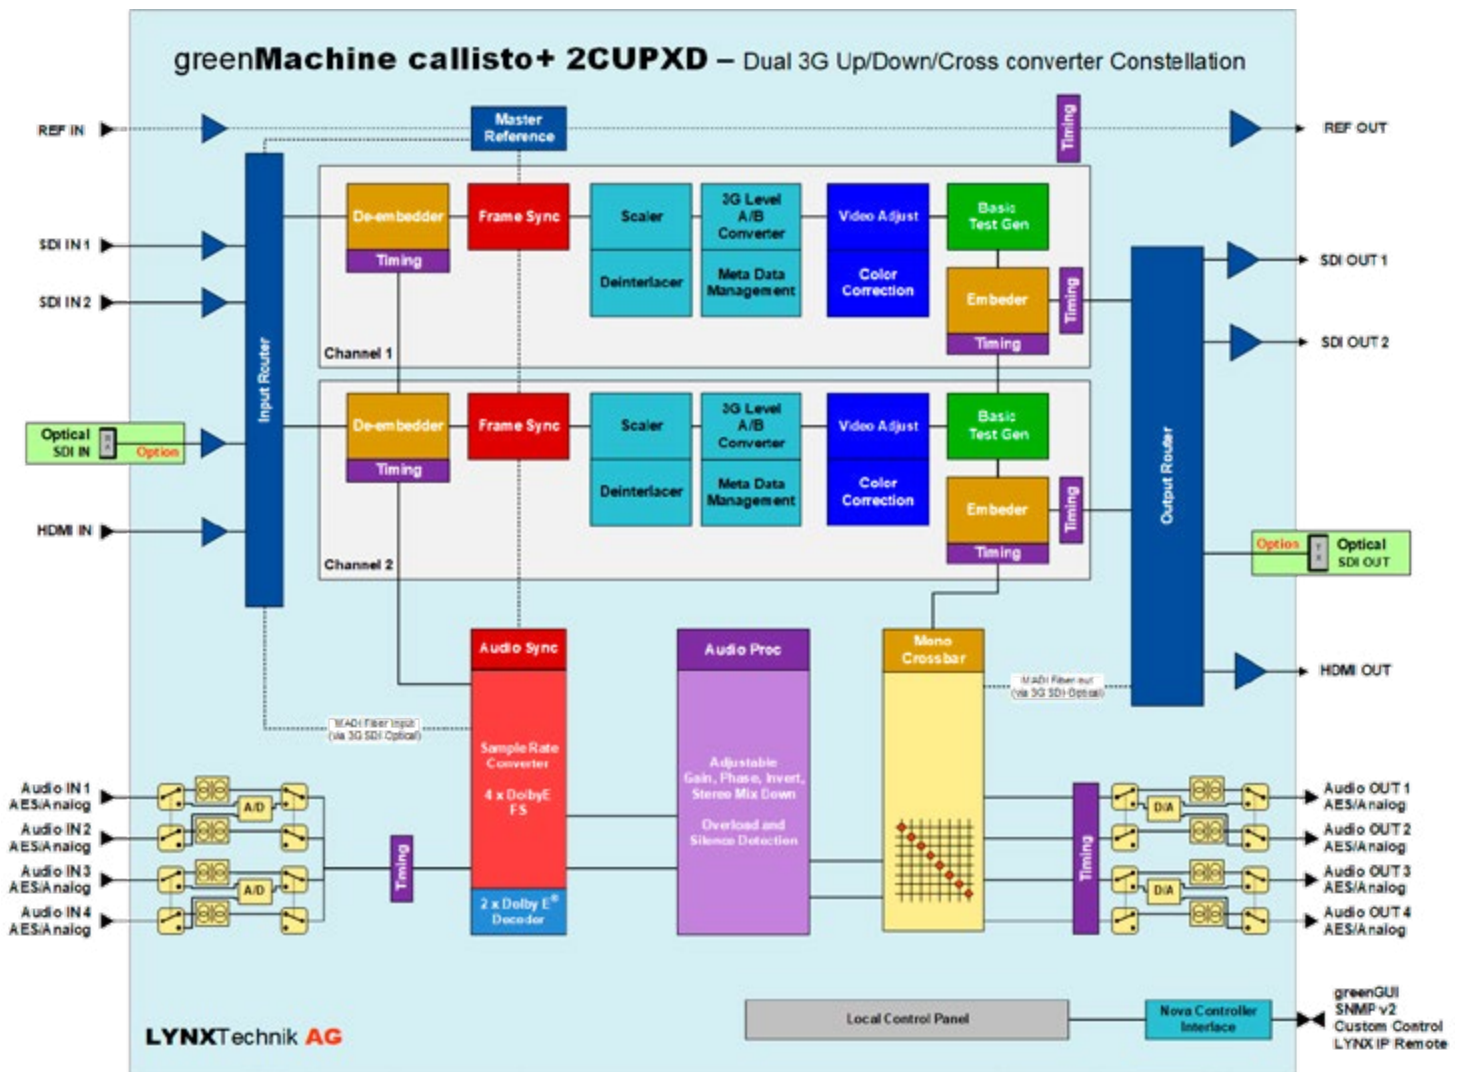

Ordering Information

greenMachine callisto+ Hardware and 2CUPXD License		
GMPC 2CUPXD (N/EU/US/UK)	Dual Channel 3G Up/Down/Cross Converter (Hardware & License)	EAN: 4250479328143
	Power plug Variants (please specify when ordering)	
	GMPC 2CUPXD N Power supply without Plug	
	GMPC 2CUPXD EU Power Supply with EU Plug	
	GMPC 2CUPXD US Power Supply with US Plug	
	GMPC 2CUPXD UK Power Supply with UK Plug	
License Only (no hardware included)		
GMC-2CUPXD	greenMachine callisto+ 2CUPXD constellation: Dual Channel 3G Up/Down/Cross Converter	EAN: 4250479328136



4FS

Frame Synchronizer

Description

The greenMachine 4FS is the next technological breakthrough for video frame synchronizer for formats up to 3Gbit/s SDI. Within a compact 1RU half 19" rackmount, 4FS provides broadcast-quality frame synchronization with full audio processing capabilities. It is designed and developed for applications that require dependable broadcast-quality frame synchronization with full audio processing capability.

Along with high-end frame synchronizer, it includes scaler with versatile region of interest (ROI) selection, basic audio & video test generator, video adjustments, color matching, and metadata management. It allows bi-level/tri-level reference signal for synchronization of video signals. It has extensive audio processing capabilities. It allows de-embedding


and embedding of all audio signals and provides support for one MADI input and output along with four external audio inputs or outputs which can individually be configured to be analog (balanced) or digital (AES) interfaces. Multiple internal crossbars allow for extensive audio shuffling including the MADI streams. It also provides two Dolby E® decoders, Dolby E® synchronization, full audio processing as well as multiple adjustable user delays for audio and video.

The greenMachine 4FS comes with a fully-featured local control interface with an LCD which displays image previews and audio level meters of the processed video paths in addition to the graphical user interface.

Features

Processing Path	4x3G	Audio crossbar	All audio generator channels can be individually assigned to the embedder inputs and the external audio outputs (AES or analog).
Frame Synchronizer	Utilizes an external reference with robust "flywheel" function for the synchronization of SDI sources. Embedded audio is extracted and delayed automatically to match the video processing delay, then embedded via a matrix into the SDI output.	3G level A/B	Provides automatic detection of 3G level A/B and allows 3G level A <> 3G level B dual-link conversion. (3G level A acc. to SMPTE ST425-1/4:2:2, 10Bit).
Metadata Management	Manages the embedded metadata in the video signals. Time code, Closed captions and Teletext can be monitored and/or converted.	Embedder/ De-embedder:	Multi-format audio embedder and de-embedder providing access to all the channels in the input SDI and allows shuffling and embedding them to the output(s). Can also embed DolbyE™ signals which in conjunction with the frame synchronizer will always maintain the guard band. Also possible to incorporate separate AES and/or analog audio inputs and outputs.
Video Adjustment	Includes saturation, gain black and hue adjustments, blanking interval deletion and aperture correction. Also provides a horizontal flip and YCrCb headroom clipping functionality.	Basic Audio & Video Test generator	Wide range of test patterns. Can be configured to work in conjunction with the frame synchronizer to output a test pattern on TRS errors.
Color Matching	Provides adjustment in gain and offset for red, green and blue (RGB) and cyan, magenta, yellow, and white (CMYW).	Timing	Each video and AES audio channel can be individually delayed. Available video delay per channel is 30 frames, audio delay is 1.3 second per AES audio channel.
Dolby E® decoder	Two Dolby E decoders can be used to decode all 8 channels contained in a Dolby E stream. Dolby metadata can be mapped to VANC acc. to SMPTE 2020-3 and SMPTE 2020-2.	Nova Controller	Full SNMP v2 along with LYNX IP remote control protocol functionality. Enables CustomControl feature that allows users to design customized control panels for a workstation, giving specific user simplified controls.
MADI in/out	Incoming MADI signals are routed to the internal audio crossbar. Outgoing MADI signal can be completely re-arranged in the internal audio crossbar.		

Functional Diagram - Quad Channel 3G

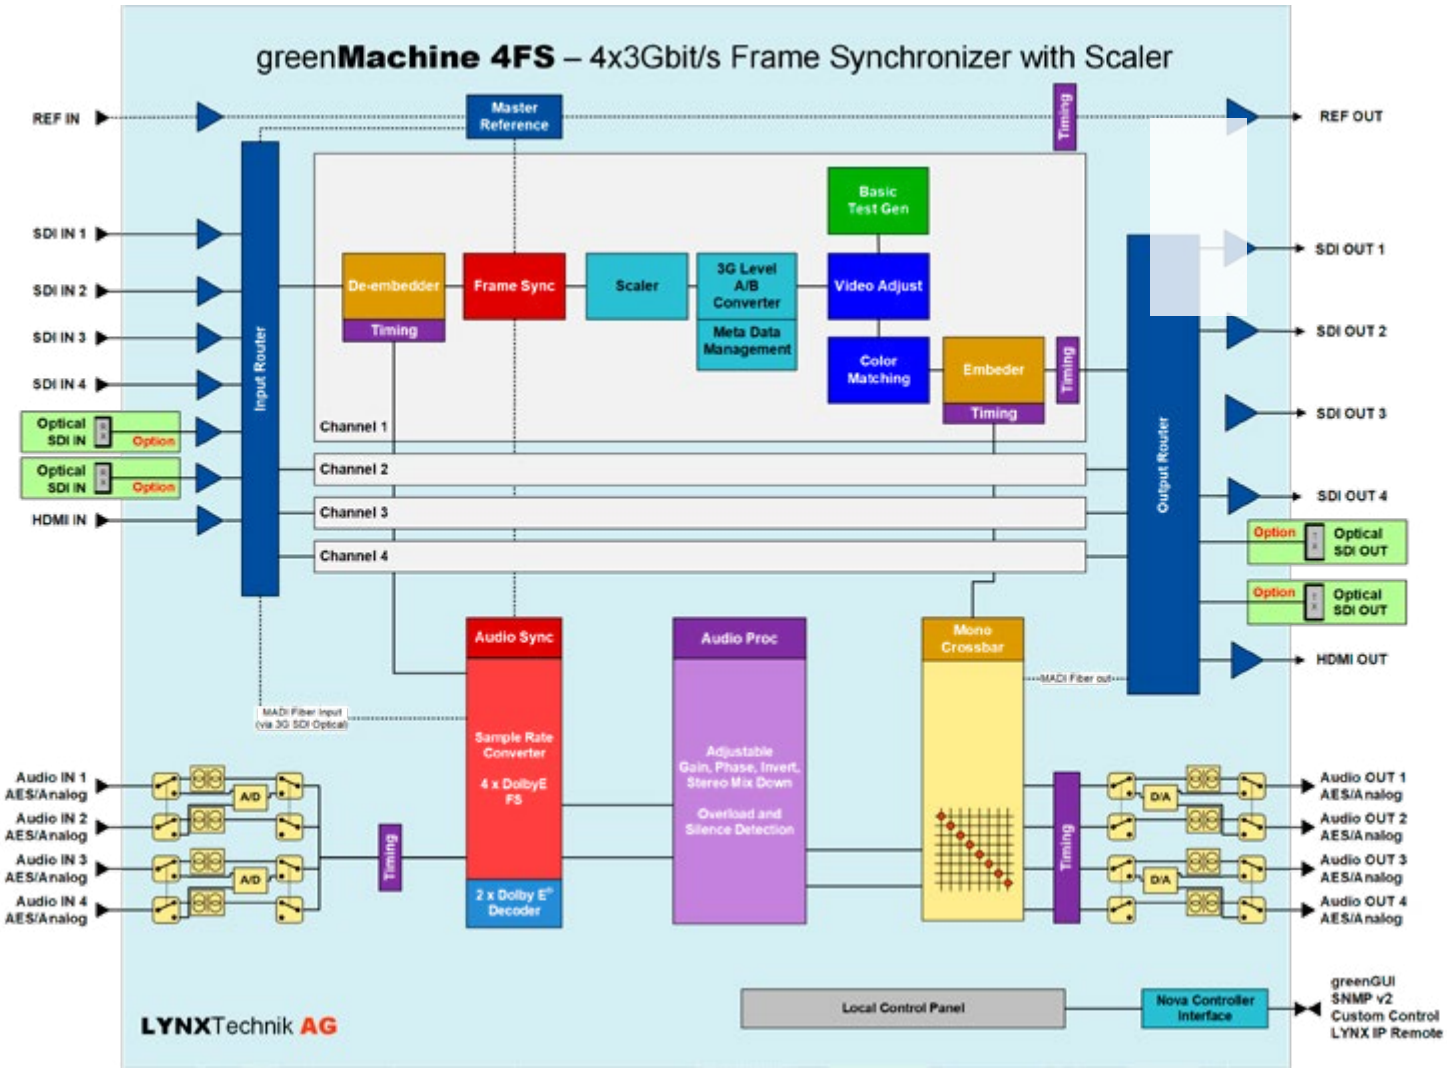


Ordering Information

greenMachine Titan Hardware and 4FS License		
Includes	GM 6840:	greenMachine titan Processors
	RPS A100:	Primary Power Supplies with Region Specific Power Cord
	GMC-quad3G-FS	4K Up/Down/Cross Converter Constellation License
GMPT 4FS (N/EU/US/UK)	4 x 3G SDI Frame Synchronizer (H/W & License) Power plug Variants (please specify when ordering) GMPT 4FS N Power supply without Plug GMPT 4FS EU Power Supply with EU Plug GMPT 4FS US Power Supply with US Plug GMPT 4FS UK Power Supply with UK Plug	EAN: 4250479327924
BIDI Transport License Only		
GMC-quad3G-FS	greenMachine titan Quad3G FS constellation: 4x3G Frame Synchronizer (License only- includes no hardware)	EAN: 4250479326057



Multi Signal Bi-Directional Transport Solution

titan
callisto
Racks

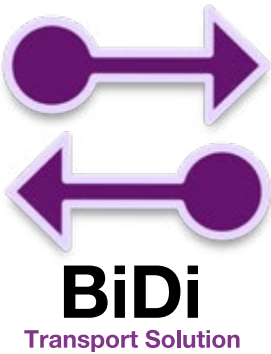

Description

The greenMachine BiDi is a multi-signal bi-directional transport solution that allows transportation of video, audio, and GPI efficiently across two greenMachine Titan hardware devices. It is a flexible solution for applications that require an exchange of multiple signals consisting of video, audio, and GPIs, on two single-fiber links over long distances. The ethernet control information can be transported over a single fiber link over bidirectional SFPs.

A Master/Slave model of communication is used between the two greenMachine Titan hardware devices where one machine will act as a Master device while the other will be a Slave. The greenMachine BiDi can transport one of the options below in both directions simultaneously:

- 1. 6xHD signals (1.485Gbit/s) with four external analog/digital audio signals and four GPIs
- 2. 4x 3G signal with four GPIs (two groups of embedded audio)
- 3. 3x3G signal, 1x HD signal, four external analog/digital audio signals and four GPIs

The options given above can be mixed proportionally up to 12Gbit/s throughput. The reference of one of the two greenMachines (aka the Master) is also transmitted to the other greenMachine (aka the Slave) and can be used in the remote location to synchronize cameras, as an example.

A 1Gbit/s ethernet transport link provides easy control of the two greenMachine via greenGUI software. For the signal transport to occur which consists of video, audio, and GPIs, the two greenMachine Titans need to be connected via two single-mode fiber cables over transceiver SFPs. For the ethernet control signal transmission, one single-mode fiber cable is required over bidirectional SFPs.

The greenMachine titan hardware comes with a fully featured local control interface with an LCD which displays image previews and audio level meters of the processed video paths in addition to the graphical user interface.

Features


- Multi-signal bidirectional transport solution through bi-directional 12G SDI channel
- SDI, HDMI and optical inputs and outputs
- 4x Audio transport in both directions
- 4x GPIO in both directions
- 1x Serial I/O (UART)
- 1x 1Gbit Ethernet transport
- 4 Audio inputs and outputs switchable between analog and digital
- 1x MADI via optical (3G)
- Included transceivers and bidirectional SFP modules for full signal transport
- Timed reference output
- Integrated local control panel for configuration and monitoring
- Extensive monitoring features such as image previews and audio level meters available on the local control panel and control software
- Full remote control using greenGUI control software CustomControl Panels
- Full SNMP v2 support
- Optional video and ethernet CWDM fiber I/O with all 18 wavelengths selectable
- Optional redundant power protection
- Optional 19" rack frame

Ordering Information


greenMachine Package		
Includes	2x GM 6840:	greenMachine titan Processors
	2x RPS A100:	Primary Power Supplies with Region Specific Power Cord
	SFPs:	12G: 1x OH-BD-12G-1270-LC, 1x OH-BD-12G-1330-LC, Ethernet: 1x OH-BD-51-1310-LC, 1x OH-BD-51-1550-LC
	2x GMC-BiDi-Transport:	Bi-Directional Transport Constellation Licence
GMPT BiDi (N/EU/US/UK)	Multi Signal Bi-Directional Transport Solution (H/W & Licenses) Power plug Variants (please specify when ordering) GMPT BiDi N Power supply without Plug GMPT BiDi EU Power Supply with EU Plug GMPT BiDi US Power Supply with US Plug GMPT BiDi UK Power Supply with UK Plug	EAN: 4250479327917
BiDi Transport License Only		
GMC-BiDi-Transport	greenMachine titan constellation: Bi-directional Transport (License only- includes no hardware)	EAN: 4250479326088

Application Example & Functional Diagram

Application Example

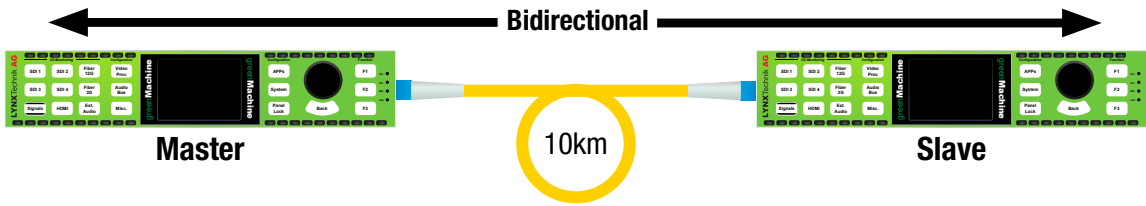


Functional Diagram

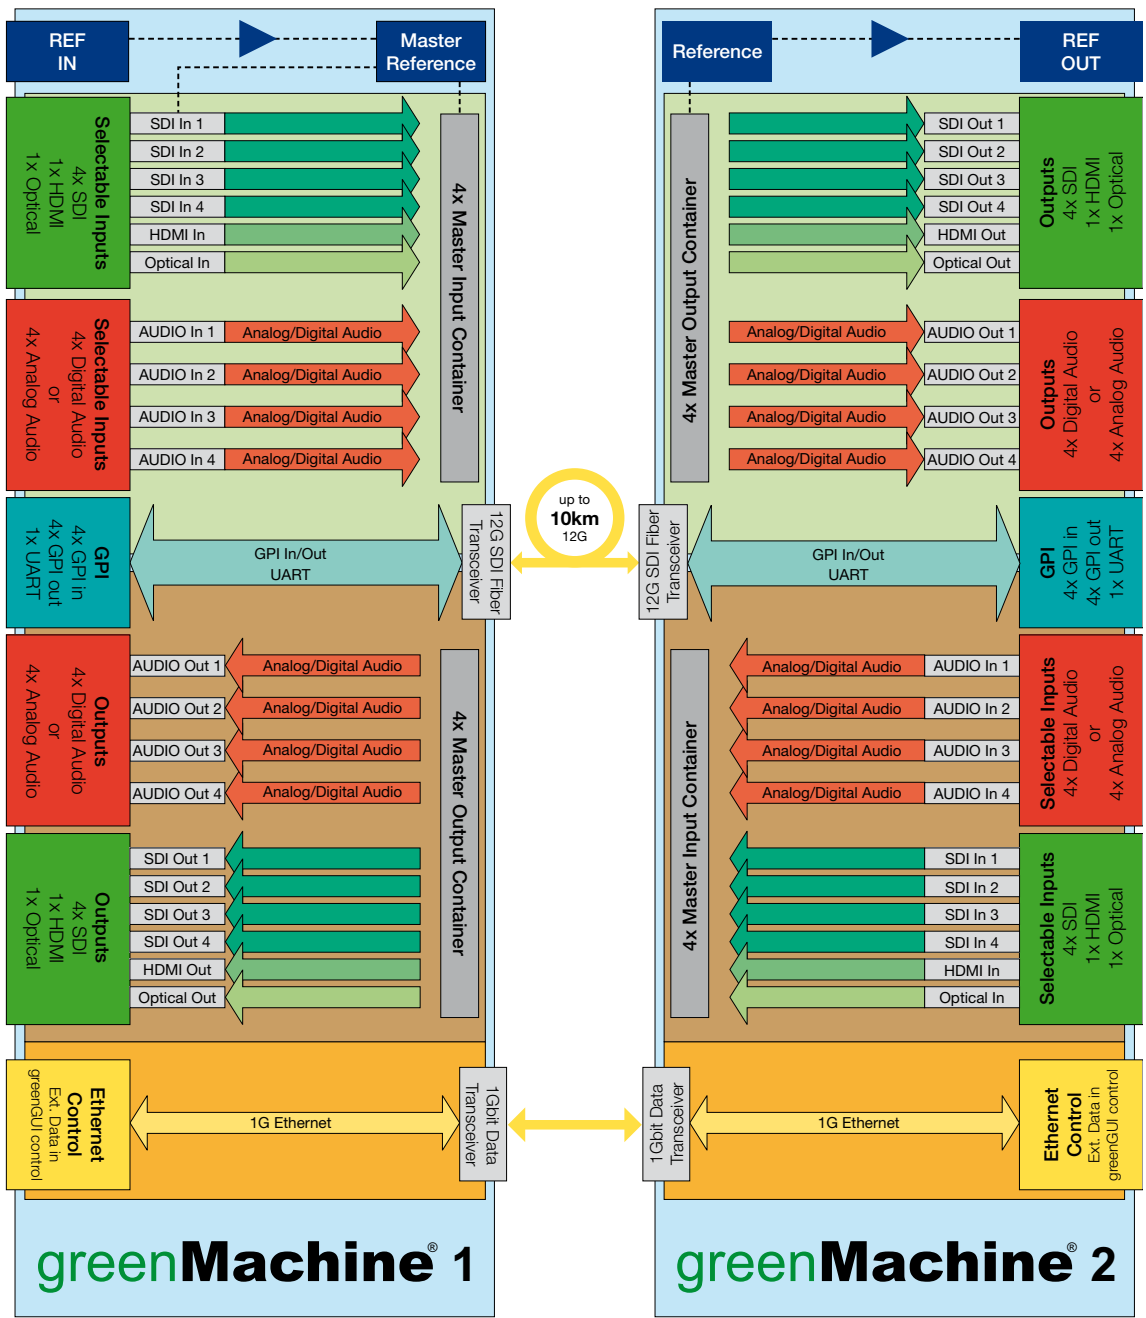

titan

callisto+

Racks



Testor
Video and Audio Testing

Description

The greenMachine Testor is a feature-rich and user-friendly multi-format test signal generator. It is an ideal troubleshooting A/V solution for technicians & engineers working in field such as on studio applications and for line-up tasks in master control rooms.

Along with standard static and dynamic video test signals & patterns, greenMachine Testor also provides the flexibility to users to upload their own user-defined signal patterns. Logos and text can be added to the test signals as well.

The greenMachine Testor is a video and audio test signal generator and supports two configurations:
1. Single Channel 4K/UHD (up to 3840 x 2160p) – 12Gbit/s SDI and quad-link (2SI)
2. Four independent (quad) channels up to 3G SDI

Features

Processing Path	4x3G 1x12G
Test Signals	Standard static and dynamic video test signals and patterns.
User-defined Signal Patterns	For added flexibility, users can upload their own user-defined signal patterns. Logos and text can also be added to test signals. It is useful for channel identification.
HDR Test signals	Additional test signals for various HDR standards (PQ, HLG, SLOG3). HDR test patterns currently only available in 4K/UHD mode.
Integrated Graphics Editor	Tool to place images & logos, text and even user-defined signals, patterns, and graphics. All items can be moved and edited simply with a computer mouse.
Scalar	Ensures users can scale test patterns to match the format.
Audio Test Generator	16-channel audio test generator with adjustable level, phase, frequency, mix-down, and an EBU/AV sequence. All the audio measures are embedded into the SDI video or routed to the external audio outputs of greenMachine.

MADI Signal	Can generate 64/56 channel MADI Signal (via 3G fiber) with each channel freely assignable to the 16-channel audio test generator.
Audio crossbar	All audio generator channels can be individually assigned to the embedder inputs and the external audio outputs (AES or analog).
Ref signal	The timing of the audio and the video test signals including the output reference signal (Bi-level SD or Tri-level HD) can be individually set in relation to an attached input reference signal.
Nova Controller	Full SNMP v2 along with LYNX IP remote control protocol functionality. Enables CustomControl feature that allows users to design customized control panels for a workstation, giving specific user simplified controls.

Ordering Information

greenMachine Package		
Includes	GM 6840:	greenMachine titan Hardware
	RPS A100:	Primary Power Supplies with Region Specific Power Cord.
	GMC-TESTOR-titan:	Testor Constellation Software License
GMPT TESTOR (N/EU/US/UK)	1 x 12G/4 x 3G SDI AV Test Signal Generator (Hardware & License) Power plug Variants (please specify when ordering) GMPT TESTOR N Power supply without Plug GMPT TESTOR EU Power Supply with EU Plug GMPT TESTOR US Power Supply with US Plug GMPT TESTOR UK Power Supply with UK Plug	EAN: 4250479327863
License Only		
GMC-TESTOR-titan	greenMachine titan Testor constellation (License only- no hardware included)	EAN: 4250479326101

Available Test Patterns


Standard Test Patterns

Center Sweep		Four-Level PLUGE		Pathological EQ	
Color Temperature		Frequency Sweep		Pathological EQ/ PLL	
Color Bar 100%		Full field Black		Pathological PLL	
Color Bar 75%		Full field Blue		Persistence Test	
Color Bar 75% over Red		Full field Cyan		Ramp Down Y	
Colorbar SMPTE		Full field Green		Ramp Up CB	
Convergence Grille		Full field Magenta		Ramp Up CR	
EBU AV Sync		Full field Red		Ramp Up Y	
Field Pattern Colorbar/Red Only Available for Interlaced standard (SD and 1080i)		Full field White		Ramp Up YCbCr	
Field Pattern Red/Colorbar Only Available for Interlaced standard (SD and 1080i)		Full field Yellow		Staircase	
Flash Black		Grey 15%		Zoneplate	
Flash White		Multiburst		Zoneplate Moving	

HDR Test Patterns

HDR Colorbar BT.2111 HLG Narrow		HDR Colorbar BT.2111 PQ Narrow		HDR PLUGE BT.814 HLG	
HDR Colorbar BT.2111 PQ Full		HDR Colorbar BT.2111 Slog3 Full		HDR PLUGE BT.814 PQ	

Functional Diagram - Single Channel 4K

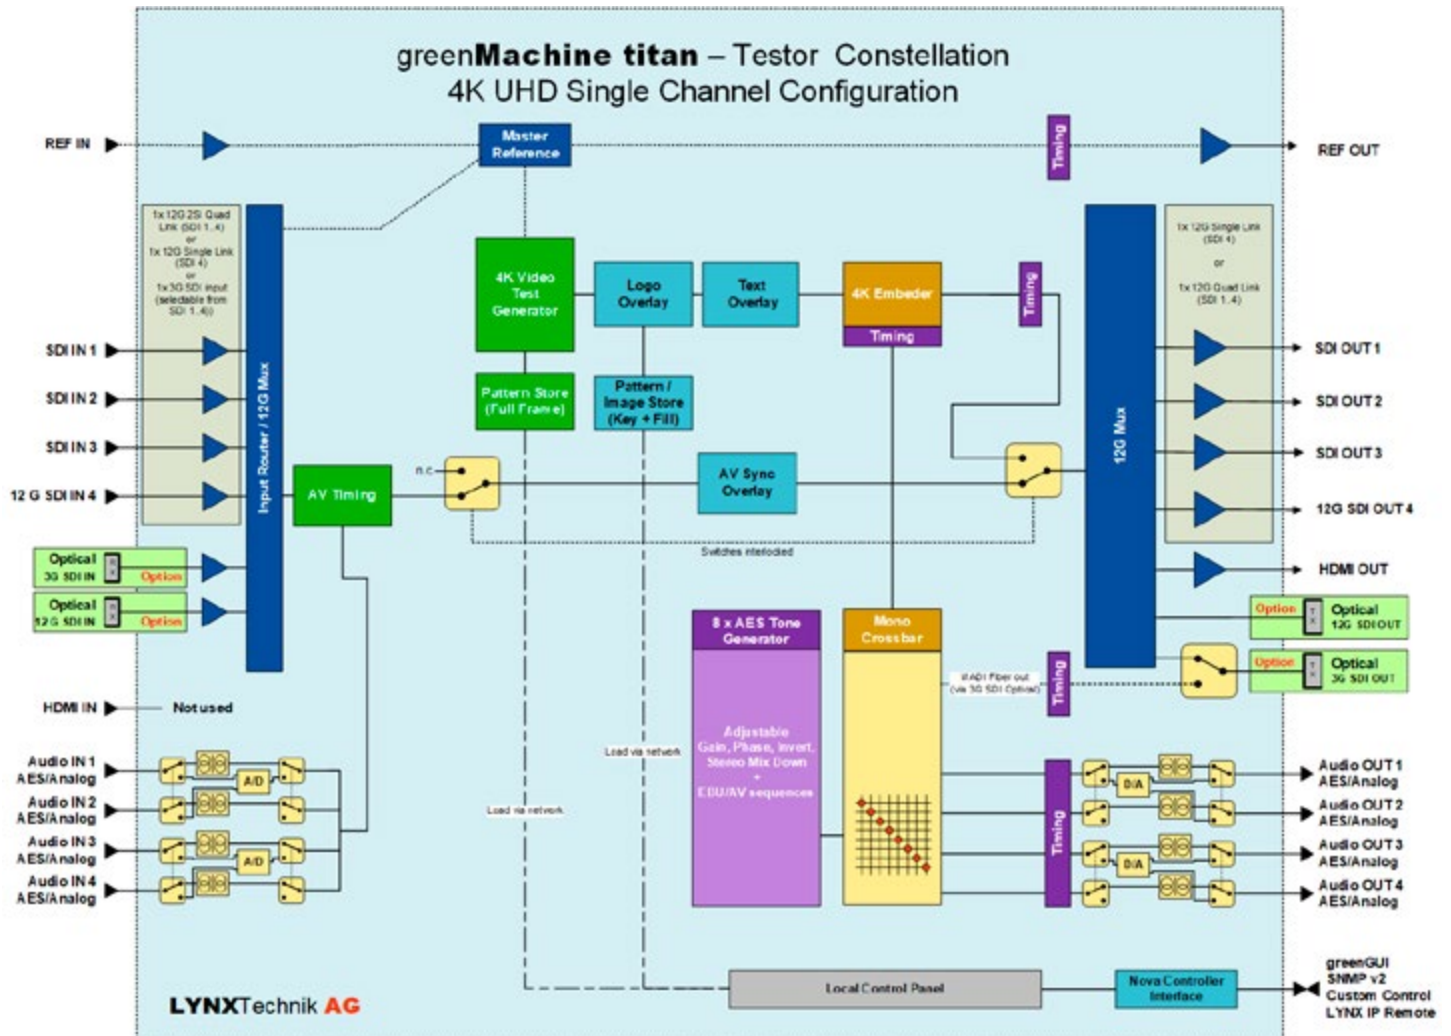

Functional Diagram - Quad Channel 3G




Rack Frame Construction Overview

The Concept

With its standalone, 1RU high /9.5" wide design the greenMachine is fit to be placed and plugged almost anywhere access to a wall plug is given. If you prefer to install it in a rack we offer a wide range of rack building options. Be it:

- RFR 6000: An additional greenMachine in a rack mount tray
- RXT 6001: Holders for power supplies
- RYB 6000: Placement option for up to 6 yellobriks with primary/redundant power, and GPIO

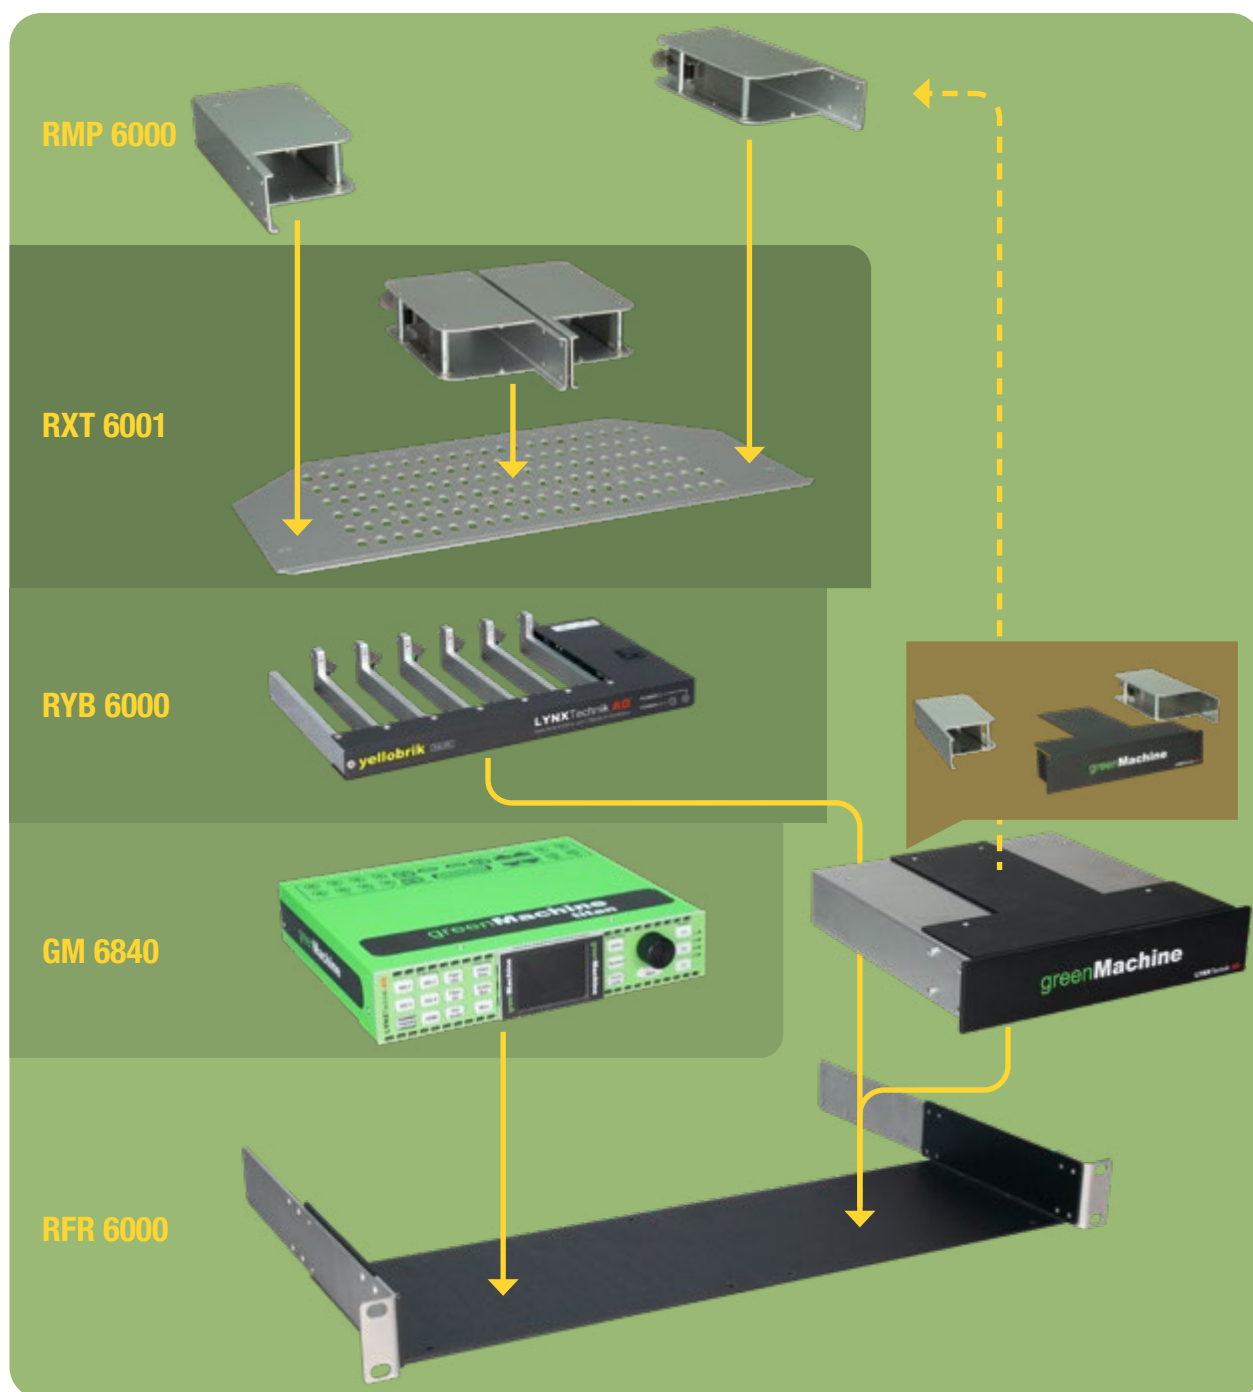

RFR 6000 and add-on construction overview

RFR 6000

1RU 19" Rack Mount Chassis



Description

The greenMachine is ideally suited for standalone “desktop” applications. However, rack mounting preferred in some situations. For larger permanent system installations where multiple greenMachines are used, rack mounting is essential. The RFR 6000 is a compact 19” rack mounting solution occupying 1RU of vertical rack space. It has can be configured to accommodate one or two greenMachines. In either configuration the RFR 6000 also provides innovative mounting options for one or two of the external RPS 6120 “brick” power supplies both of which can be securely mounted within the 19” 1RU footprint.

Specifications

Height	1RU
Width	19" rack mount
Depth Single Module	29.7cm (11.69")
Depth Two Modules	44.7cm (17.59")
Weight	1.5 kg (3.31 Lbs)
Model #	RFR 6000 - (EAN# 4250479324466)
Includes	RFR 6000 rack frame, Phillips screwdriver and quick reference guide.

Features

- Standard 19” rack mount
- Compact 1RU design
- Accommodates one or two greenMachines
- Innovative mounting options for up to two RPS 6120 power supplies(primary and secondary)
- Forward rack position adjustable to recessed, flush or protruded

Power Supply Mounting

The greenMachine includes the RPS 6120 primary power supply, which is an external desktop “brick” style power supply. An optional second power supply can be added for redundant protection. When installing the greenMachine into the RFR 6000 rack frame we have provided two separate power supply “caddies” each of which can securely accommodate an RPS 6120 brick power supply. Installation is simple and requires no tools and provides easy access should the power supply need to be removed or replaced. The power supply caddies can be relocated to the rear of the frame when two greenMachines are installed.



Ordering Information

Name	Discription	GTIN/EAN
RFR 6000	1RU 19" Rack Mount Chassis	4250479327269
RYB 6000	yellobrik mount extension for RFR 6000	4250479324466
RXT 6001	Power Supply Mounting Case	4250479324466
RPS A100	Secondary Power Supply	4250479327955

Rack Frames

RYB 6000

yellobrik mount extension for RFR 6000

titan
callisto
Racks



Description

The greenMachine is ideally suited for standalone “desktop” applications. However, rack mounting preferred in some situations. For larger permanent system installations where multiple greenMachines are used, rack mounting is essential. The RFR 6000 is a compact 19” rack mounting solution occupying 1RU of vertical rack space. It has can be configured to accommodate one or two greenMachines. In either configuration the RFR 6000 also provides innovative mounting options for one or two of the external RPS 6120 “brick” power supplies both of which can be securely mounted within the 19” 1RU footprint. The RPB 6000 power bridge cable is available for the greenMachine callisto. This cable provides power redundancy when the frame is configured for two greenMachine callistousing dual power supplies. Simply cross connect the power connections of both greenMachinecallisto with the power bridge cable and each greenMachine shares the two power supplies for primary and redundant power protection.

Features

- Standard 19” rack mount
- Compact 1RU design
- Accommodates one or two greenMachines
- Innovative mounting options for up to two RPS 6120 power supplies(primary and secondary)
- Forward rack position adjustable to recessed, flush or protruded

Specifications

Height	1RU
Width	19” rack mount
Depth Single Module	29.7cm (11.69”)
Depth Two Modules	44.7cm (17.59”)
Weight	1.5 kg (3.31 Lbs)
Model #	RFR 6000 - (EAN# 4250479324466)
Includes	RFR 6000 rack frame, Phillips screwdriver and quick reference guide.

Ordering Information

Name	Discription	GTIN/EAN
RYB 6000	yellobrik mount extension for RFR 6000	



RYB 6000 installed and fully loaded on RFR 6000. Neither greenMachine , nor RFR 6000 or displayed yellobriks included.

RXT 6001**19" Rack Frame extension for RFR 6000****Description**

The RXT 6001 is a compact and flexible rack extension for RFR 6000. It can be setup to hold up to four RPS 6120 power supplies.

The power supply mounting brackets can be arranged in several different configurations, depending on your needs.

It is recommended to use rack rails to support the weight of additional power supplies.

Features


- Compact 1 RU design
- Accommodates four power supplies for 2 greenMachines
- Innovative mounting for up to four RPS6120 power supplies
- Power cases position adjustable on the rack frame

Specifications

Height	1RU
Width	19" rack mount
Depth Single Module	29.7cm (11.69")
Depth Two Modules	44.7cm (17.59")
Weight	1.5 kg (3.31 Lbs)
Model #	RFR 6000 - (EAN# 4250479324466)
Includes	RFR 6000 rack frame, Phillips screwdriver and quick reference guide.



Two greenMachines setup

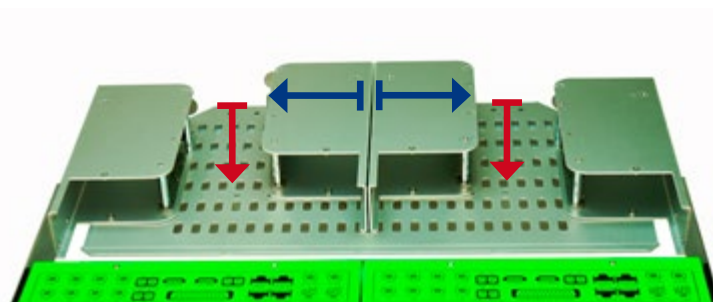

Adjustable mounting position

Ordering Information

Name	Description	GTIN/EAN
RXT 6001	19" Rack Frame extension for RFR 6000	

RPS A100

Universal AC to DC Power Supply



Description


The RPS A100 AC to DC Desktop power supply unit provides 100 watts of continuous output power. The power supply is equipped with IEC320-C14 AC inlet.

Features

- 100W Universal AC input / Full range
- Built-in active PFC function
- Energy efficiency level VI
- LED indicator for Power on

Specifications

Output	DC Voltage	12V
	Rated Current	8.3A
	Current Range	0~8.3A
	Rated Power (max.)	100 W
	Ripple & Noise (max)	230mVp-p
	Voltage Tolerance	±5.0%
	Line Regulation	±1.0%
	Load Regulation	±5.0%
Input	Setup, Rise Time	2000ms, 30ms / 230VAC 2500ms, 30ms / 115VAC at full load
	Hold Up Time	20ms / 230VAC 20ms / 115VAC at full load
	Voltage Range	100~240VAC
	Frequency Range	50~60Hz
	Efficiency (Typ)	Level VI or CoC Tier II
Protection	AC Current	2A
	Inrush Current (max.)	Cold start 80/115AC 120/230VAC
	Overload	105 ~ 160% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed
	Overvoltage	105 ~ 135% rated output voltage Protection type : Shut down o/p voltage, re-power on to recover
	Over Temperature	Shut down o/p voltage, re-power on to recover
Environment	Working Temp.	0 ~ +90°C
	Working Humidity	20% ~ 90% RH non-condensing
	Storage Temp.	-20 ~ +85°C
	Humidity	10 ~ 95% RH non-condensing
	Temp. Coefficient	±0.03% / °C 0~45 °C)
Others	Vibration	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes
	MTBF	368.75K hrs min. MIL-HDBK-217F(25 °C)
	Dimension	137*59*34 mm (L*W*H)
Safety Standards	Weight	450g
		UL62368-1, CSA C22.2 No. 62368-1, TUV EN62368-1, BSMI CNS14336, CCC GB4943.1, PSE J62368-1,AS/NZS 60950.1, FCC, IRAM, RCM

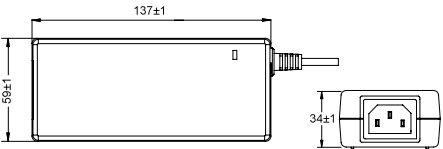

Note:
1. Measurements are in mm
2. Net weight: approx. 450g

Connector	Pin Assignment
1	GND
2	NC
3	NC
4	+12V



Ordering Information

Name	Description	GTIN/EAN
RPS A100	AC to DC Desktop Power Supply Module 12V/8A	4250479327955

ABS Case for greenMachine



greenMachine® not included

Description


The transport case is perfect to keep your greenMachine®, cables and documents organized and in one place, while also protecting it from environmental influences. With it's study design, our ABS Case is the ideal partner to transport your greenMachine® whenever it is not wired in a rack, standalone or any other system you can think of. The hard shell case protects your greenMachine® from most impacts in an average, busy work environment, while the inner foam coating prevents it from being scratched by cables, connectors or other equipment that can also be stored inside the case. The foam pocket inside the top lid of the case is ideal for storing quick reference guide, notes or any documentation.

Features

- Impact dampening ABS Case
- Various storage spaces for supplies
- Sturdy closing mechanisms

Specifications

Height	1RU
Width	19" rack mount
Depth Single Module	29.7cm (11.69")
Depth Two Modules	44.7cm (17.59")
Weight	1.5 kg (3.31 Lbs)
Model #	RFR 6000 - (EAN# 4250479324466)
Includes	RFR 6000 rack frame, Phillips screwdriver and quick reference guide.

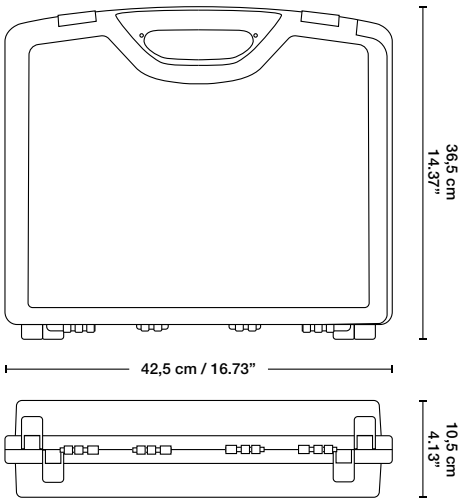


Ordering Information	
Name	GTIN/EAN
ABS Case for greenMachine	4250479327573

Knowlege Base

We have lots of articles, tips, and tutorial videos which should answer most of your questions. Just visit the LYNXTechnik knowlege base.



support.lynx-technik.com

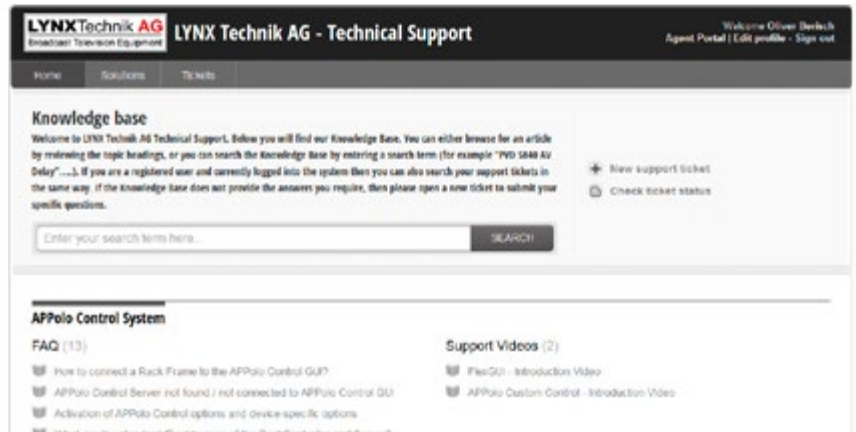

Get in Touch

Can't find the information you need? Feel like something is missing on our websites? Looking for oem prices? Get in touch and contact us via or contact form or open a support ticket here:

Need assistance with a product?



ticket.lynx-technik.com

Need help finding the right product?



salescontact.lynx-technik.com

European Headquarters LYNX Technik AG

Phone: + 49 (0) 6150 1817 0
Fax: + 49 (0) 6150 1817 100

Contact us



info@lynx-technik.com

USA Headquarters LYNX Technik USA

Phone: (661) 251 8600
Fax: (661) 251 8088

Contact us



info@lynx-usa.com

APAC Headquarters LYNX Technik Pte Ltd

Phone: + 65 6702 5277
Fax: + 65 6385 5221

Contact us



infoasia@lynx-technik.com



Warranty Information

LYNX Technik AG warrants that the product will be free from defects in materials and workmanship for a period of three (3) years from the date of shipment. If this product proves defective during the warranty period, LYNX Technik AG at its option will either repair the defective product without charge for parts and labor, or will provide a replacement in exchange for the defective product.

In order to obtain service under this warranty, customer must notify LYNX Technik of the defect before expiration of the warranty period and make suitable arrangements for the performance of service. Customer shall be responsible for packaging and shipping the defective product to the service center designated by LYNX Technik, with shipping charges prepaid. LYNX Technik shall pay for the return of the product to the customer if the shipment is within the country which the LYNX Technik service center is located. Customer shall be responsible for payment of all shipping charges, duties, taxes and any other charges for products returned to any other locations.

This warranty shall not apply to any defect, failure, or damage caused by improper use or improper or inadequate maintenance and care. LYNX Technik shall not be obligated to furnish service under this warranty a) to repair damage resulting from attempts by personnel other than LYNX Technik representatives to install, repair or service the product; b) to repair damage resulting from improper use or connection to incompatible equipment; c) to repair any damage or malfunction caused by the use of non LYNX Technik supplies; or d) to service a product which has been modified or integrated with other products when the effect of such modification or integration increases the time or difficulty servicing the product.

THIS WARRANTY IS GIVEN BY LYNX TECHNIK WITH RESPECT TO THIS PRODUCT IN LIEU OF ANY OTHER WARRANTIES, EXPRESS OR IMPLIED. LYNX TECHNIK AND ITS VENDORS DISCLAIM ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. LYNX TECHNIK'S RESPONSIBILITY TO REPAIR AND REPLACE DEFECTIVE PRODUCTS IS THE SOLE AND EXCLUSIVE REMEDY PROVIDED TO THE CUSTOMER FOR BREACH OF THIS WARRANTY. LYNX TECHNIK AND ITS VENDORS WILL NOT BE LIABLE FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES IRRESPECTIVE OF WHETHER LYNX TECHNIK OR THE VENDOR HAS ADVANCE NOTICE OF THE POSSIBILITY OF SUCH DAMAGES.

For greenMachine the following regulatory and safety standards apply:

CE: EN 55103-1/1996, EN 55103-2/1996, EN 60950-1/2006

Following the provisions of 2004/108/EC and 2006/95/EC directives.

FCC: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15, Subpart B of the FCC Rules.

The RPS A100 power supply (EA11011D-1200) complies with the following safety standards:

UL/cUL 62368-1, TUV EN 62368-1, CB IEC 62368-1, FCC, CE, BSMI, PSE, RCM, IRAM





green-machine.com

European Headquarters

LYNX Technik AG

Brunnenweg 3
D-64331 Weiterstadt
Germany

Phone: + 49 (0) 6150 1817 0
Fax: + 49 (0) 6150 1817 100
Email: info@lynx-technik.com

APAC Headquarters

LYNX Technik Pte Ltd

114 Lavender Street
#05-92 CTHub2
Singapore 338729

Phone: + 65 6702 5277
Fax: + 65 6385 5221
Email: infoasia@lynx-technik.com

USA Headquarters

LYNX Technik USA

26366 Ruether Ave
Santa Clarita, CA 91350
USA

Phone: (661) 251 8600
Fax: (661) 251 8088
Email: info@lynx-usa.com

www.lynx-technik.com



[lynxtechnik](https://www.facebook.com/lynxtechnik)



[lynxtechnik](https://twitter.com/lynxtechnik)



[lynx-technik-ag](https://www.linkedin.com/company/lynx-technik-ag)



[lynxtechnikag](https://www.youtube.com/lynxtechnikag)