

## IPK-1

The IPK-1 is designed to provide easy access and convenient control to a room or zone using any of the following Russound audio systems\*: MCA-66, MCA-88, MBX-PRE, or MBX-AMP. While the Russound audio systems can be controlled by app, many users prefer having a dedicated keypad that is always available without having to pull out their phone, navigate to the Russound app, and then navigate to the room they want to control. The IPK-1 is designed to intuitively control your system without interfering with your lifestyle. For example, the volume LED's only illuminate when the volume is adjusted. The status LED is designed to turn off when your audio system is not in use so that the LED will never light up a dark bedroom at night.

### Key Features

Simple Configuration, No Programming Needed

Controls a Russound Audio Zone

Provides Easy to Use Interface for Audio Control and Favorites

POE Powered: 802.3af (Power supply not included)

Works with\*: MCA-66, MCA-88, MBX-AMP, MBX-PRE


Includes Black and White Decora Inserts. *Decora wall-plate NOT included and must be purchased separately*

Requires a Wired Ethernet Connection

Mounting Depth Behind Faceplate: 1-1/32"(26.2 mm)

\* Refer to Russound website for latest product compatibility.

**Keypad Overview**

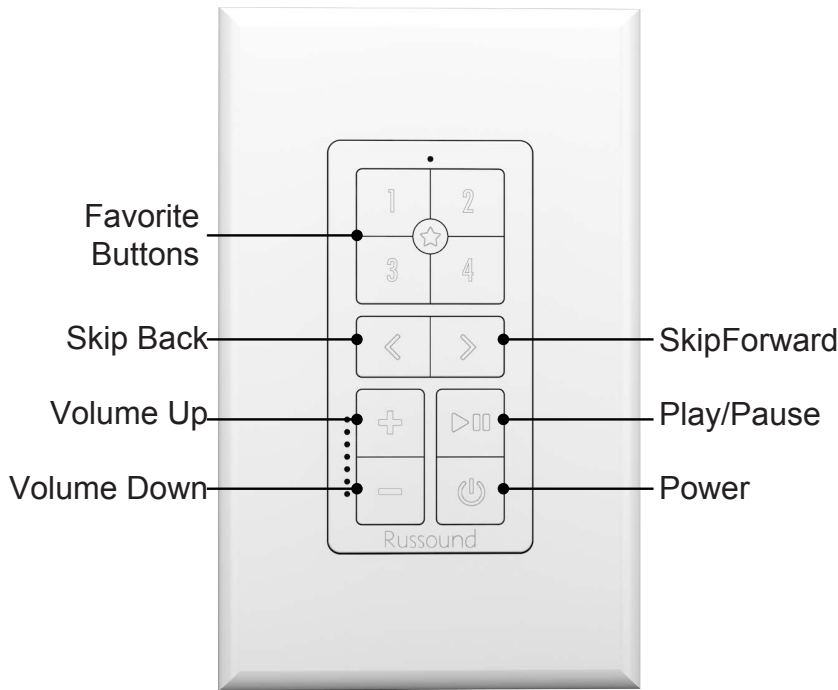

**Favorite Buttons**

Press to play a pre-stored Favorite (1, 2, 3 or 4)  
 Press and hold to store the currently playing content as a Favorite.

**Skip Back**

Press once to return to the beginning of the currently playing track.  
 Press twice quickly to play the previously playing track.

**Skip Forward**

Press to skip to the next track.

**Volume Up/Down**

Press to adjust the volume in small increments.  
 Press and hold to ramp the volume quickly up or down.  
 The volume LED's will turn on briefly to show the current volume level.

**Play/Pause**

Press to toggle between Play/Pause. Use this button to quickly stop the music and again to resume it.

**Power**

**MCA-Series Zones**


Press to toggle the Zone On or Off – If a source is actively playing and selected for the zone, it begins playing immediately when the zone is turned on.

Press and Hold to send an "All Off" command to turn off all compatible Russound devices.

**MBX-Series**

Press to stop the currently playing music. Press and Hold to send an "All Off" command to turn off all compatible Russound devices.

**Installation**

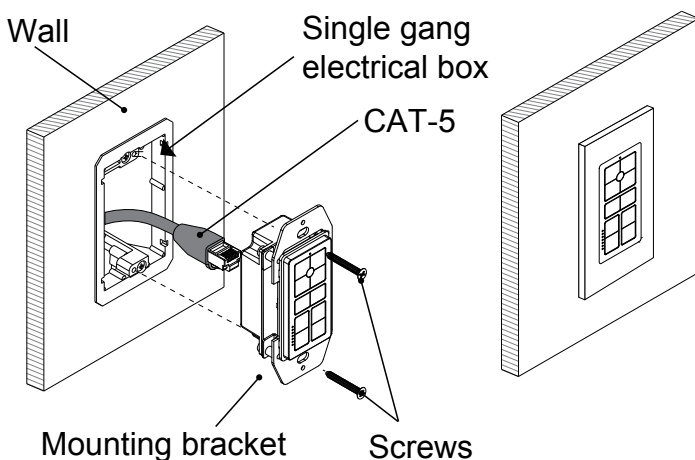

**What's In The Box**

- 1 IPK-1
- 1 Installation Guide
- 1 Set of Mounting Screws
- 1 Decora Insert - White
- 1 Decora Insert - Black

