


# SPS-V-5

## SLIDING PANEL MECHANISM - VERTICAL



future automation

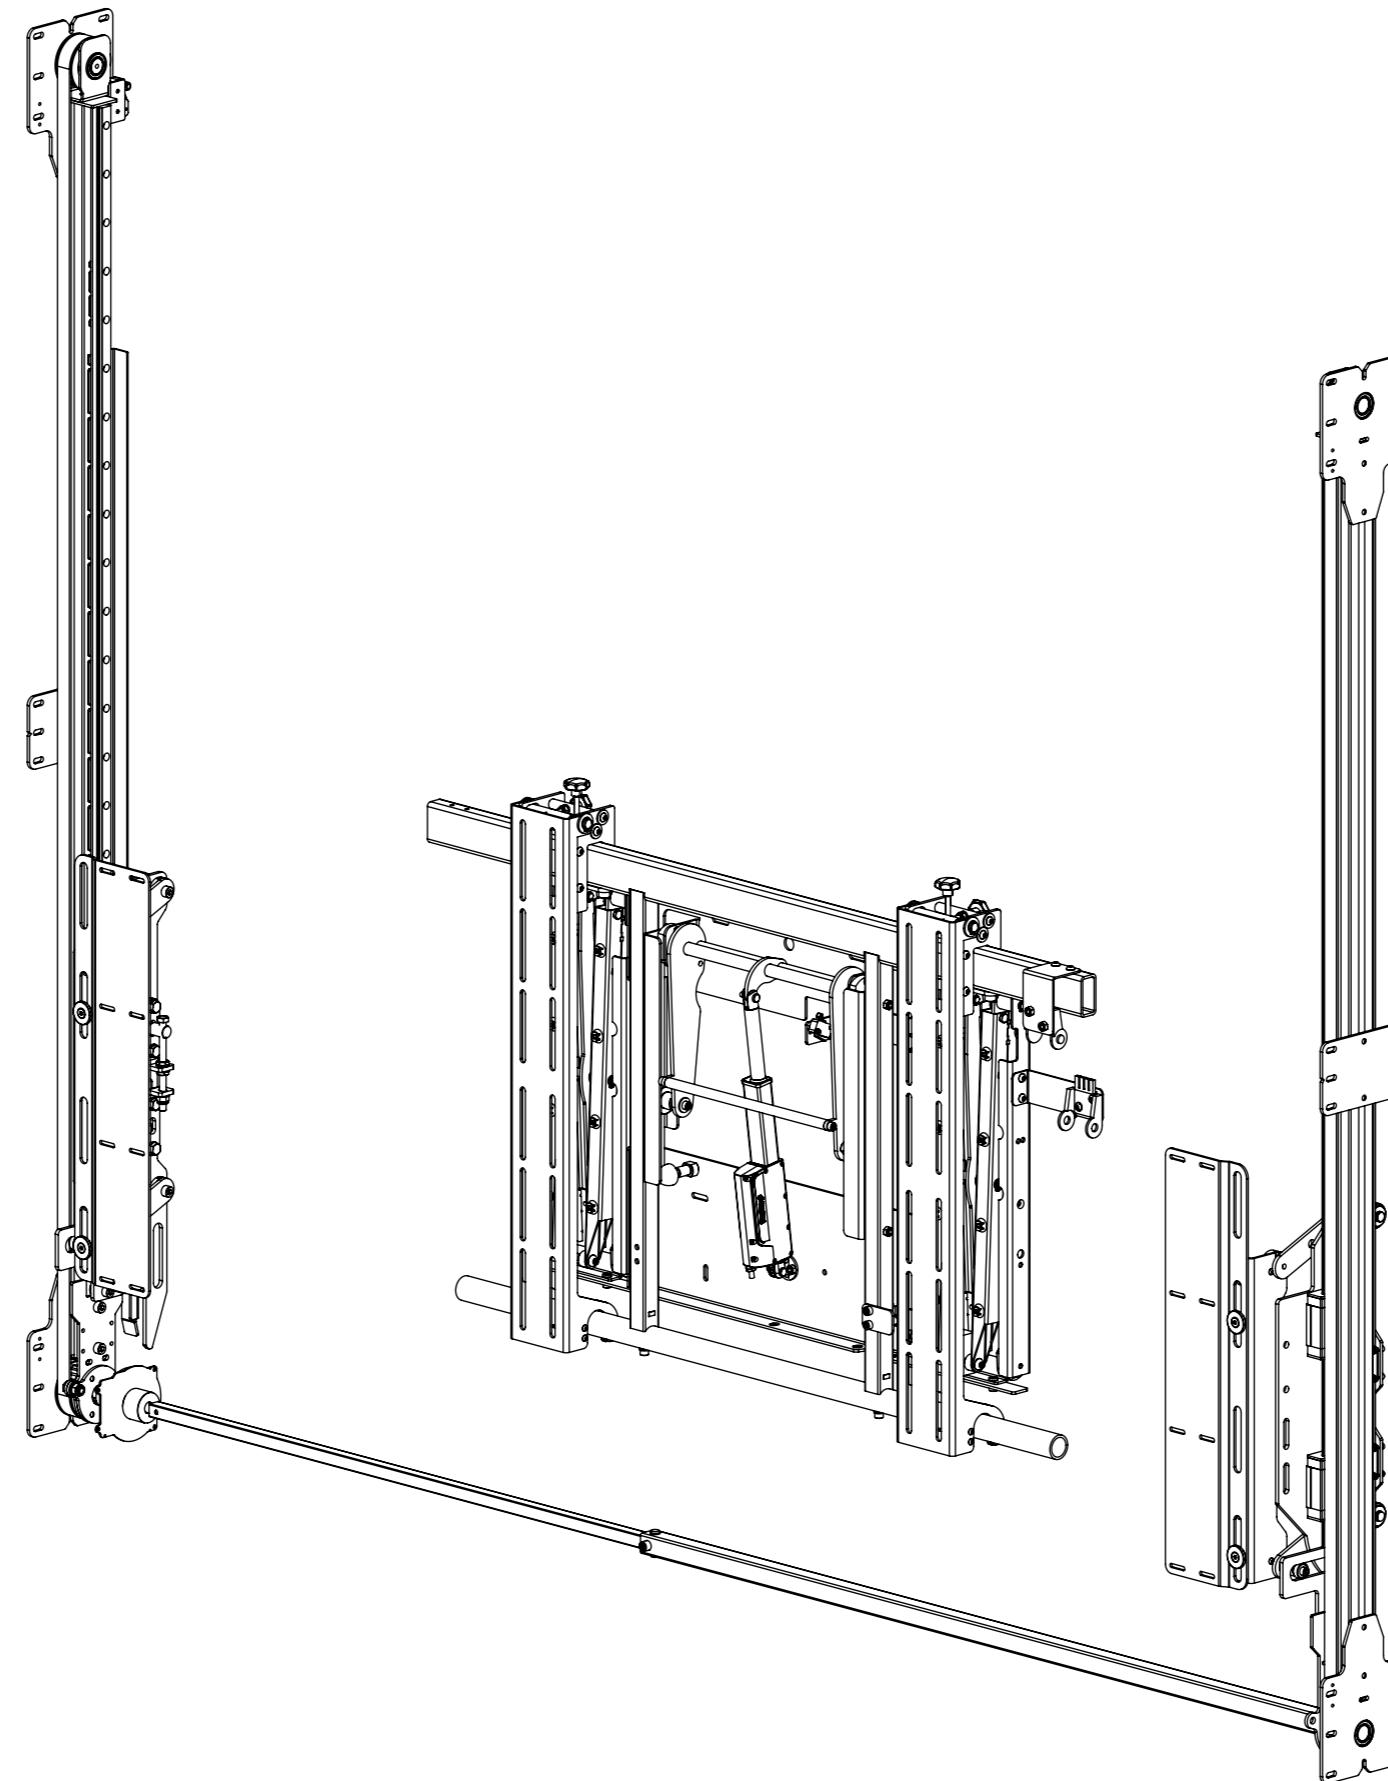

**TECHNICAL SHEET**  
ISSUE 001  
SHEET 1

# SPS-V-5



## SLIDING PANEL MECHANISM - VERTICAL

MODEL	DESCRIPTION	MIN SCREEN HEIGHT	MAX SCREEN HEIGHT
SPS-V-5	Vertical - Single Panel	700 [27 9/16"]	800 [31 1/2"]
SPS-V-6	Vertical - Single Panel	801 [31 9/16"]	950 [37 3/8"]
SPS-V-7	Vertical - Single Panel	951 [37 7/16"]	1100 [43 5/16"]
SPS-V-8	Vertical - Single Panel	1101 [43 3/8"]	1250 [49 3/16"]
SPS-VS-5	Vertical - Double Splitting Panel	700 [27 9/16"]	800 [31 1/2"]
SPS-VS-6	Vertical - Double Splitting Panel	801 [31 9/16"]	950 [37 3/8"]
SPS-VS-7	Vertical - Double Splitting Panel	951 [37 7/16"]	1100 [43 5/16"]
SPS-VS-8	Vertical - Double Splitting Panel	1101 [43 3/8"]	1250 [49 3/16"]




future automation


### SPS-V - VERTICAL - SINGLE PANEL

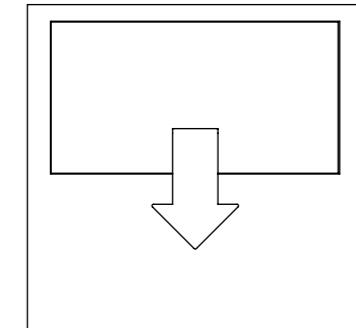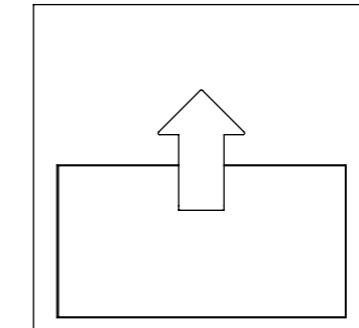

### SPS-VS - VERTICAL SPLIT - DOUBLE PANEL

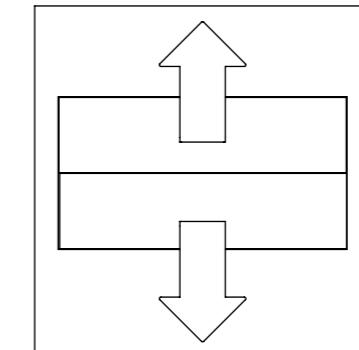


### SPS-HZ - HORIZONTAL - SINGLE PANEL

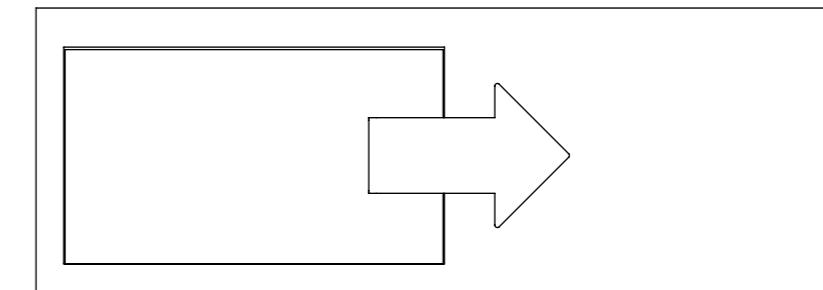

MODEL	DESCRIPTION	MIN SCREEN WIDTH	MAX SCREEN WIDTH
SPS-HZ-6	Horizontal - Single Panel	1400 [55 1/8"]	1600 [63"]
SPS-HZ-7	Horizontal - Single Panel	1601 [63 1/16"]	1850 [72 13/16"]
SPS-HZ-8	Horizontal - Single Panel	1851 [72 7/8"]	2100 [82 11/16"]
SPS-HZS-6	Horizontal - Double Splitting Panel	1400 [55 1/8"]	1600 [63"]
SPS-HZS-7	Horizontal - Double Splitting Panel	1601 [63 1/16"]	1850 [72 13/16"]
SPS-HZS-8	Horizontal - Double Splitting Panel	1851 [72 7/8"]	2100 [82 11/16"]

### SPS-HZS - HORIZONTAL SPLIT- DOUBLE PANEL

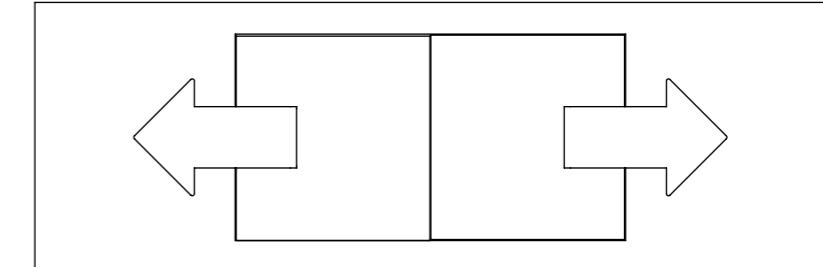

# SPS-V-5


## SLIDING PANEL MECHANISM - VERTICAL




future automation

SPECIFICATION	MEASUREMENTS
Minimum Screen Height	700 [27 9/16"]
Maximum Screen Height	800 [31 1/2"]
Minimum Screen Width	1100 [43 5/16"]
Maximum Screen Width	1600 [63"]
Maximum Moving Panel Weight	35Kg (77lbs)
Maximum Screen Weight	100Kg (220lbs)
Total Mechanism Weight	TBC
Packaging Dimensions (LxWxH)	TBC
Shipping Weight	TBC
Movement Type	Motorised
Power Supply Required	110V - 240V AC
Power Consumption Max.	120W
Power Consumption Standby	3W
Mounting Patterns Supported	VESA 200 - 800 W x 200 - 600 H
Control Options	IR Remote, RS232, Contact Closure
Product Options / Features	QA2 pairing option
Package Contents	Mechanism, IR remote control, Bolt Pack
Marine Suitable	Yes (Indoor)


1. Panel Closed

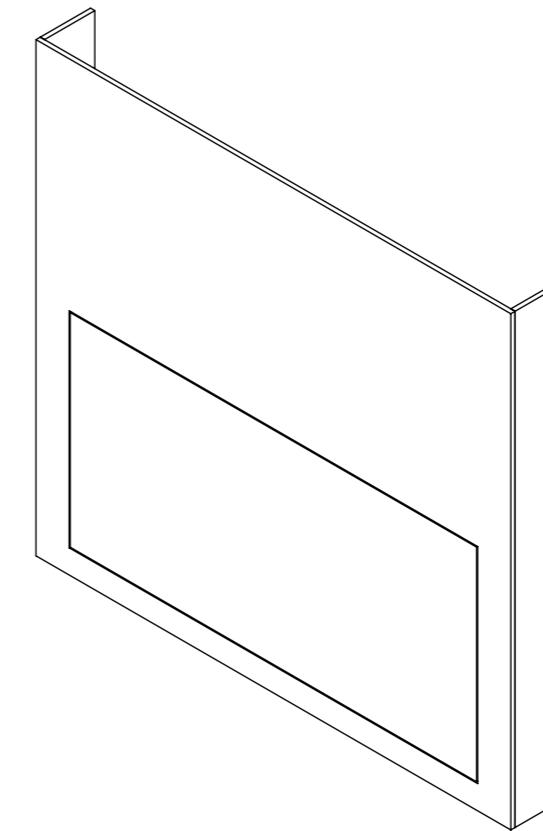


2. Panel Retracts

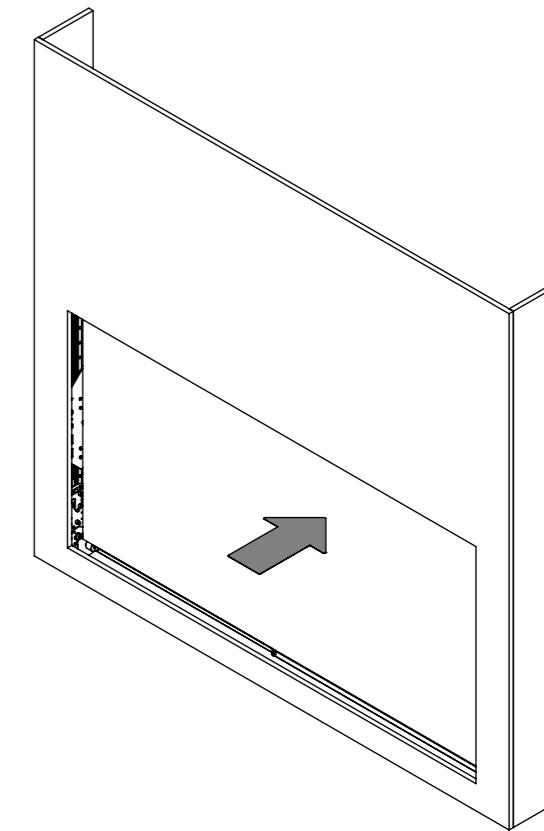

3. Panel Lifts

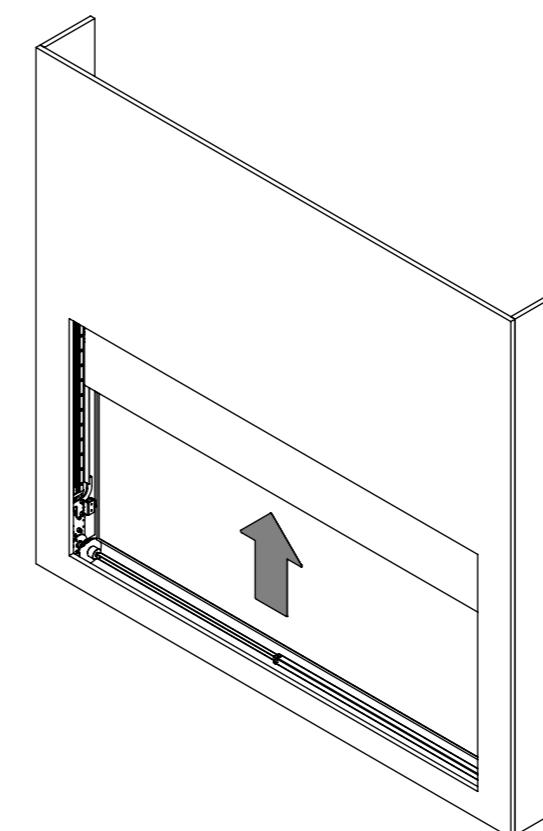

4. Screen Advances

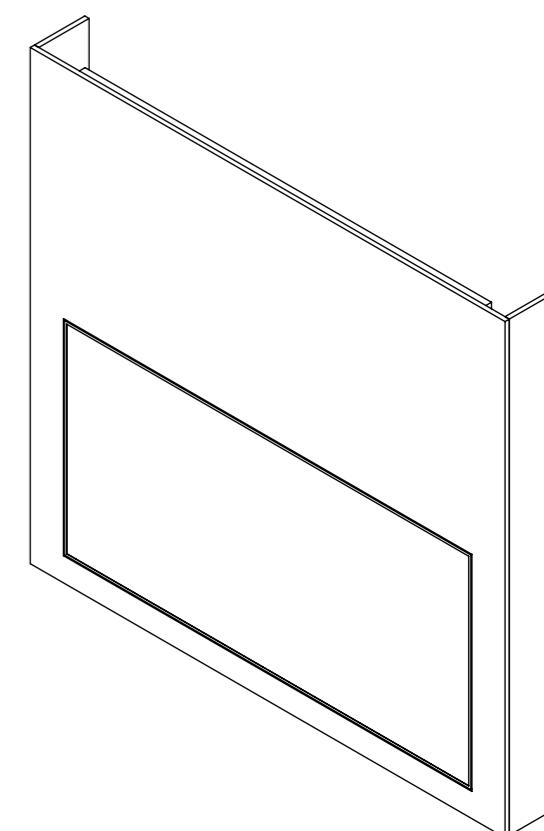



# SPS-V-5

## SLIDING PANEL MECHANISM - VERTICAL


### CABINET DIMENSIONS - WIDTH AND HEIGHT

Screen Height	Install Height
700 [27 9/16"] → 710 [27 15/16"]	1610 [63 3/8"]
710 [27 15/16"] → 800 [31 1/2"]	(2 x Screen Height) + 190


Screen Width	Install width
1100 [43 5/16"] → 1600 [63"]	Screen Width + 280

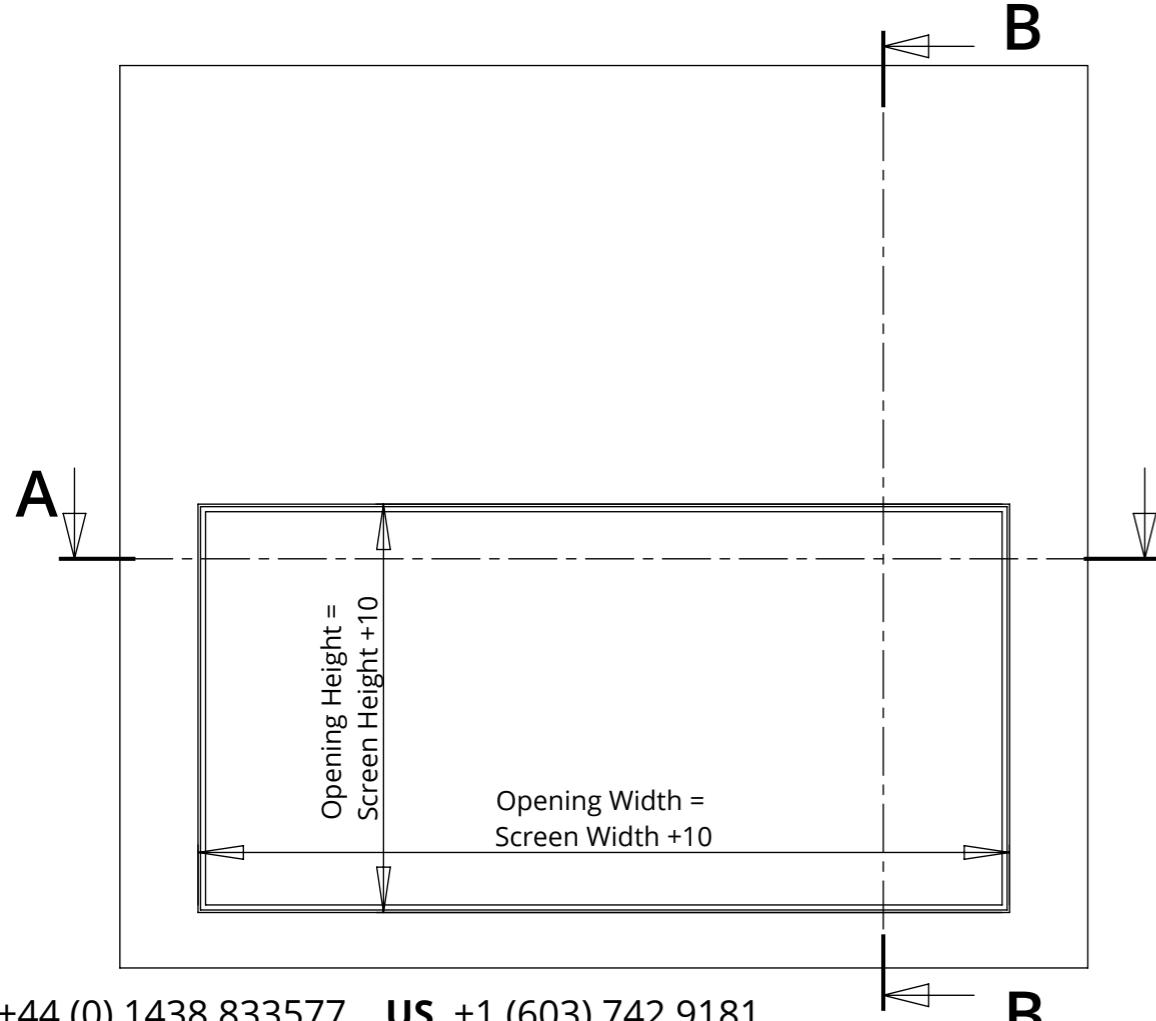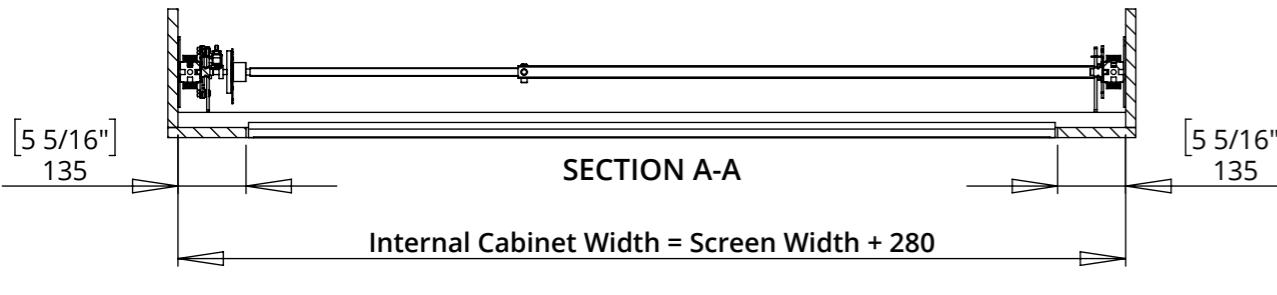

SECTION B-B  
Minimum Screen Height

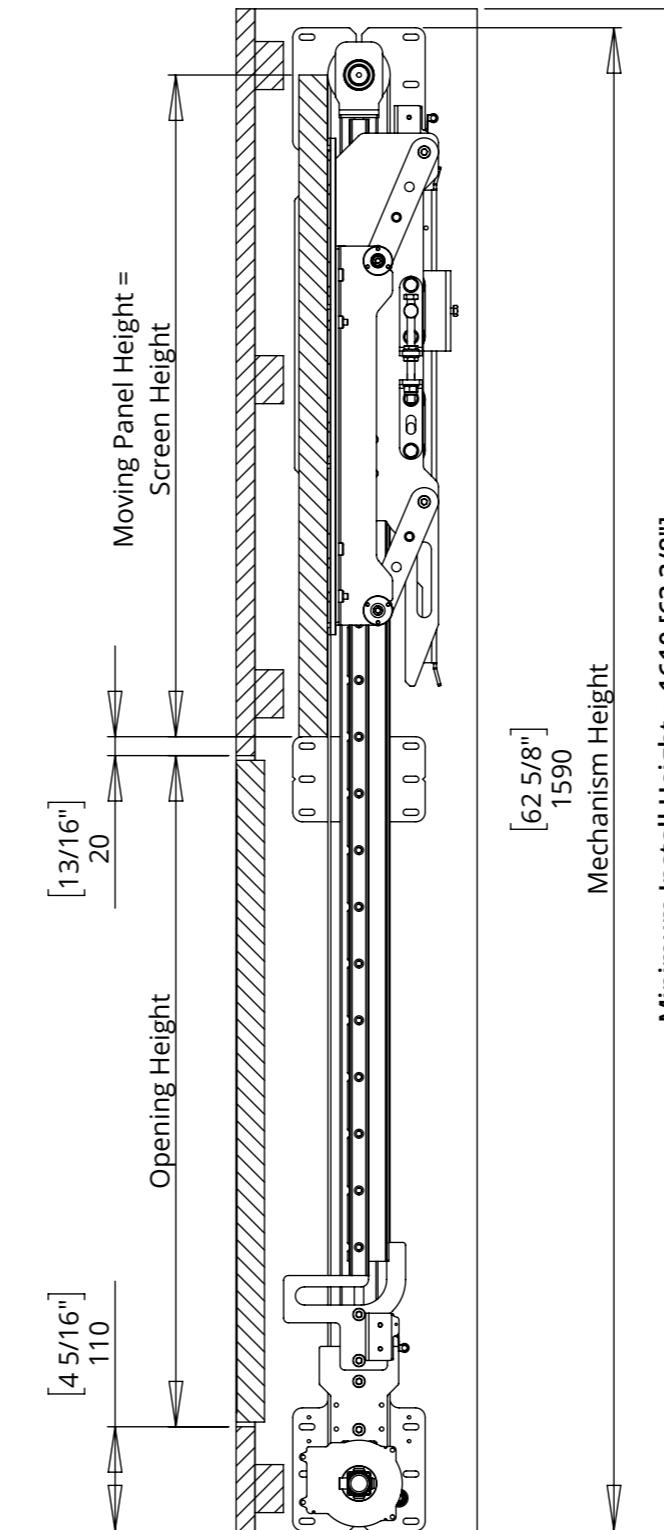

SECTION B-B  
Maximum Screen Height

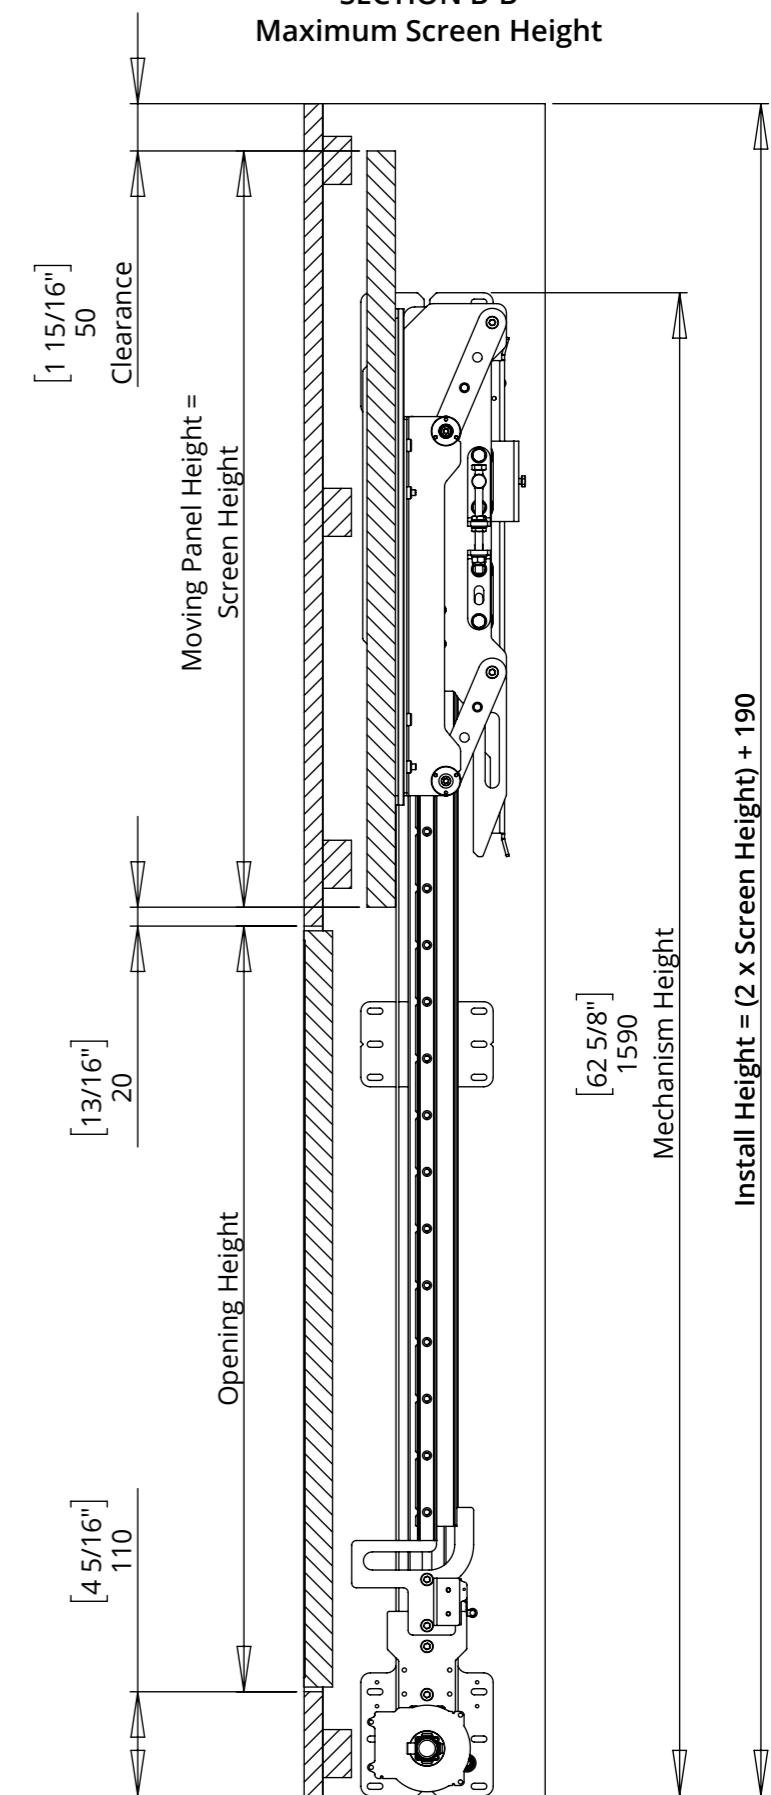

#### CABINET DIMENSIONS - DEPTH

The minimum depth of 205mm [8 1/16"] allows for a maximum screen depth of 30mm [1 3/16"].


Screens with a greater thickness will need the cabinet depth to increase i.e. a 100mm [3 15/16"] thick screen will require a cabinet of 275mm [10 13/16"].

Screens thinner than 30mm [1 3/16"] must still use the minimum 205mm [8 1/16"] cabinet depth.



Recommended batten to support front panel above opening

Screen - IN

Recommended batten to support front panel above opening

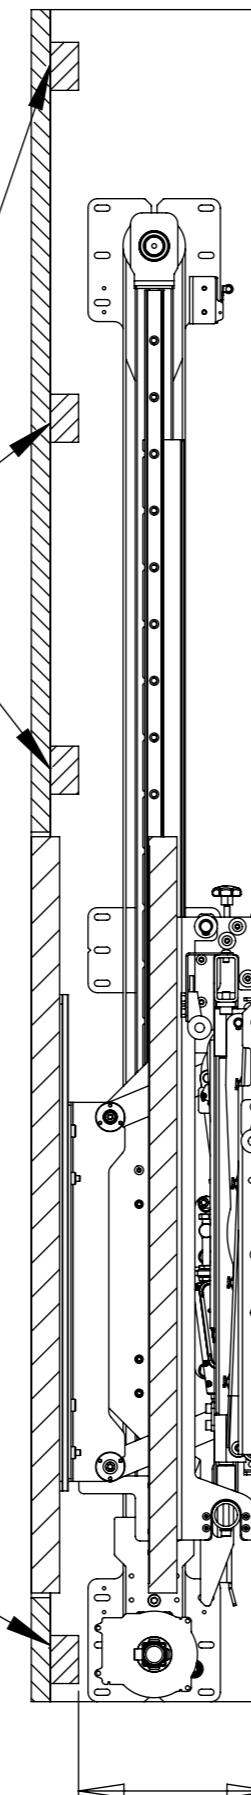

Screen - OUT

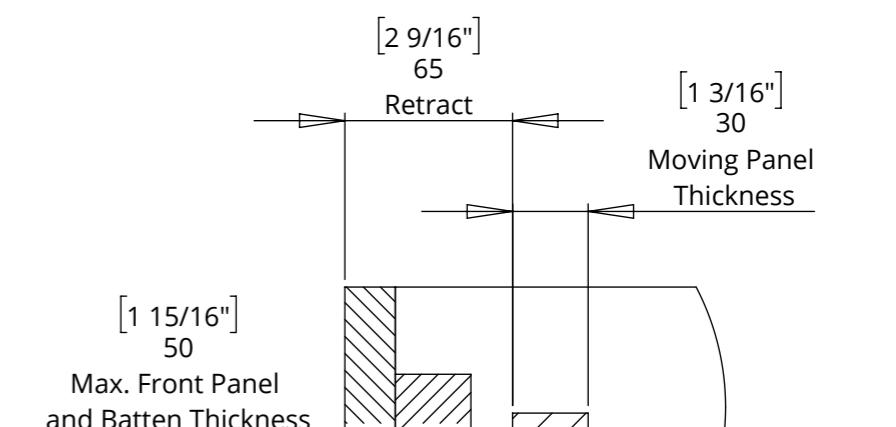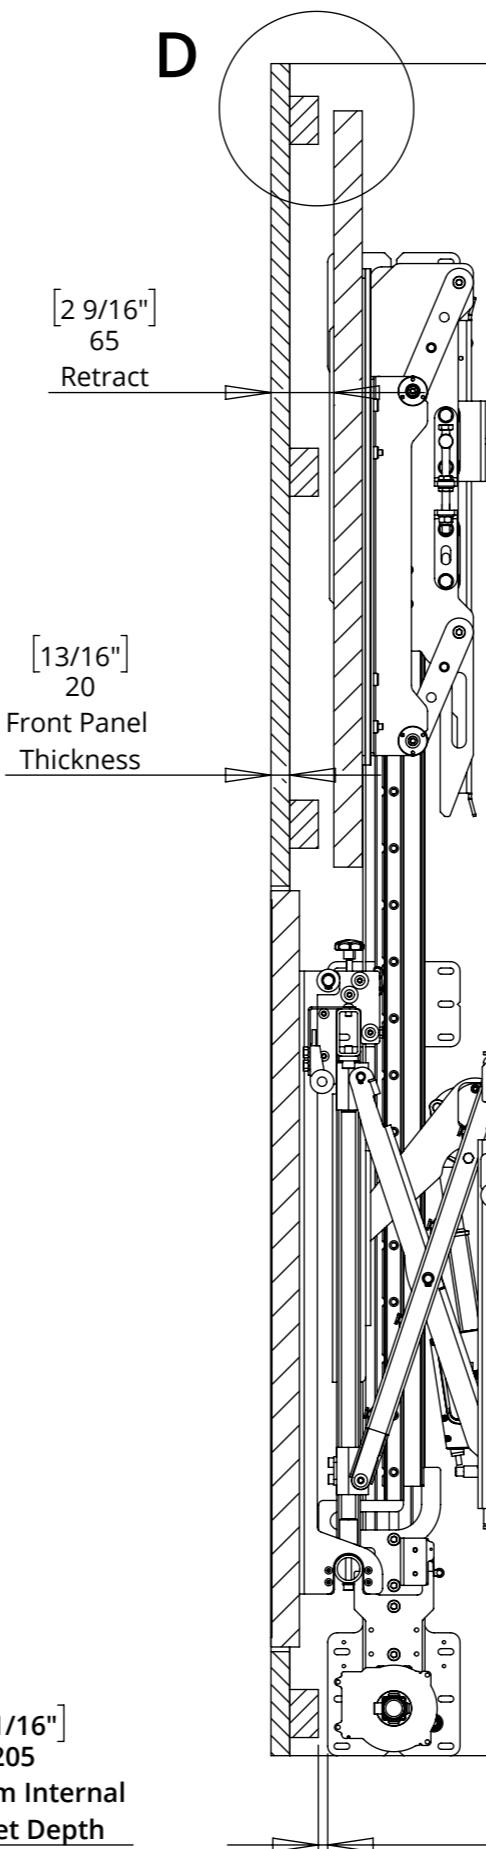

The moving panel retracts back by 65mm [2 9/16"] before rising. For this reason it is advised the front panel work and support batten is no more than 50mm [1 15/16"] thick to give 15mm [9/16"] clearance.

Thicker panels are possible, but will add to the cabinet depth and require customisation to the mechanism design.

# **SPS-V-5**

## **SLIDING PANEL MECHANISM - VERTICAL**



## CABINET DETAILS INVERTED

Screen Height	Install Height
700 [27 9/16"] → 710 [27 15/16"]	1610 [63 3/8"]
710 [27 15/16"] → 800 [31 1/2"]	(2 x Screen Height) + 190
Screen Width	Install width
1100 [43 5/16"] → 1600 [63"]	Screen Width + 280

The SPS-V can be inverted so the panel retracts the drops instead. The mechanism used is the same as in the original orientation, the mechanism is just rotated through 180°.

## 1. Panel Retracts


## 2. Panel Drops

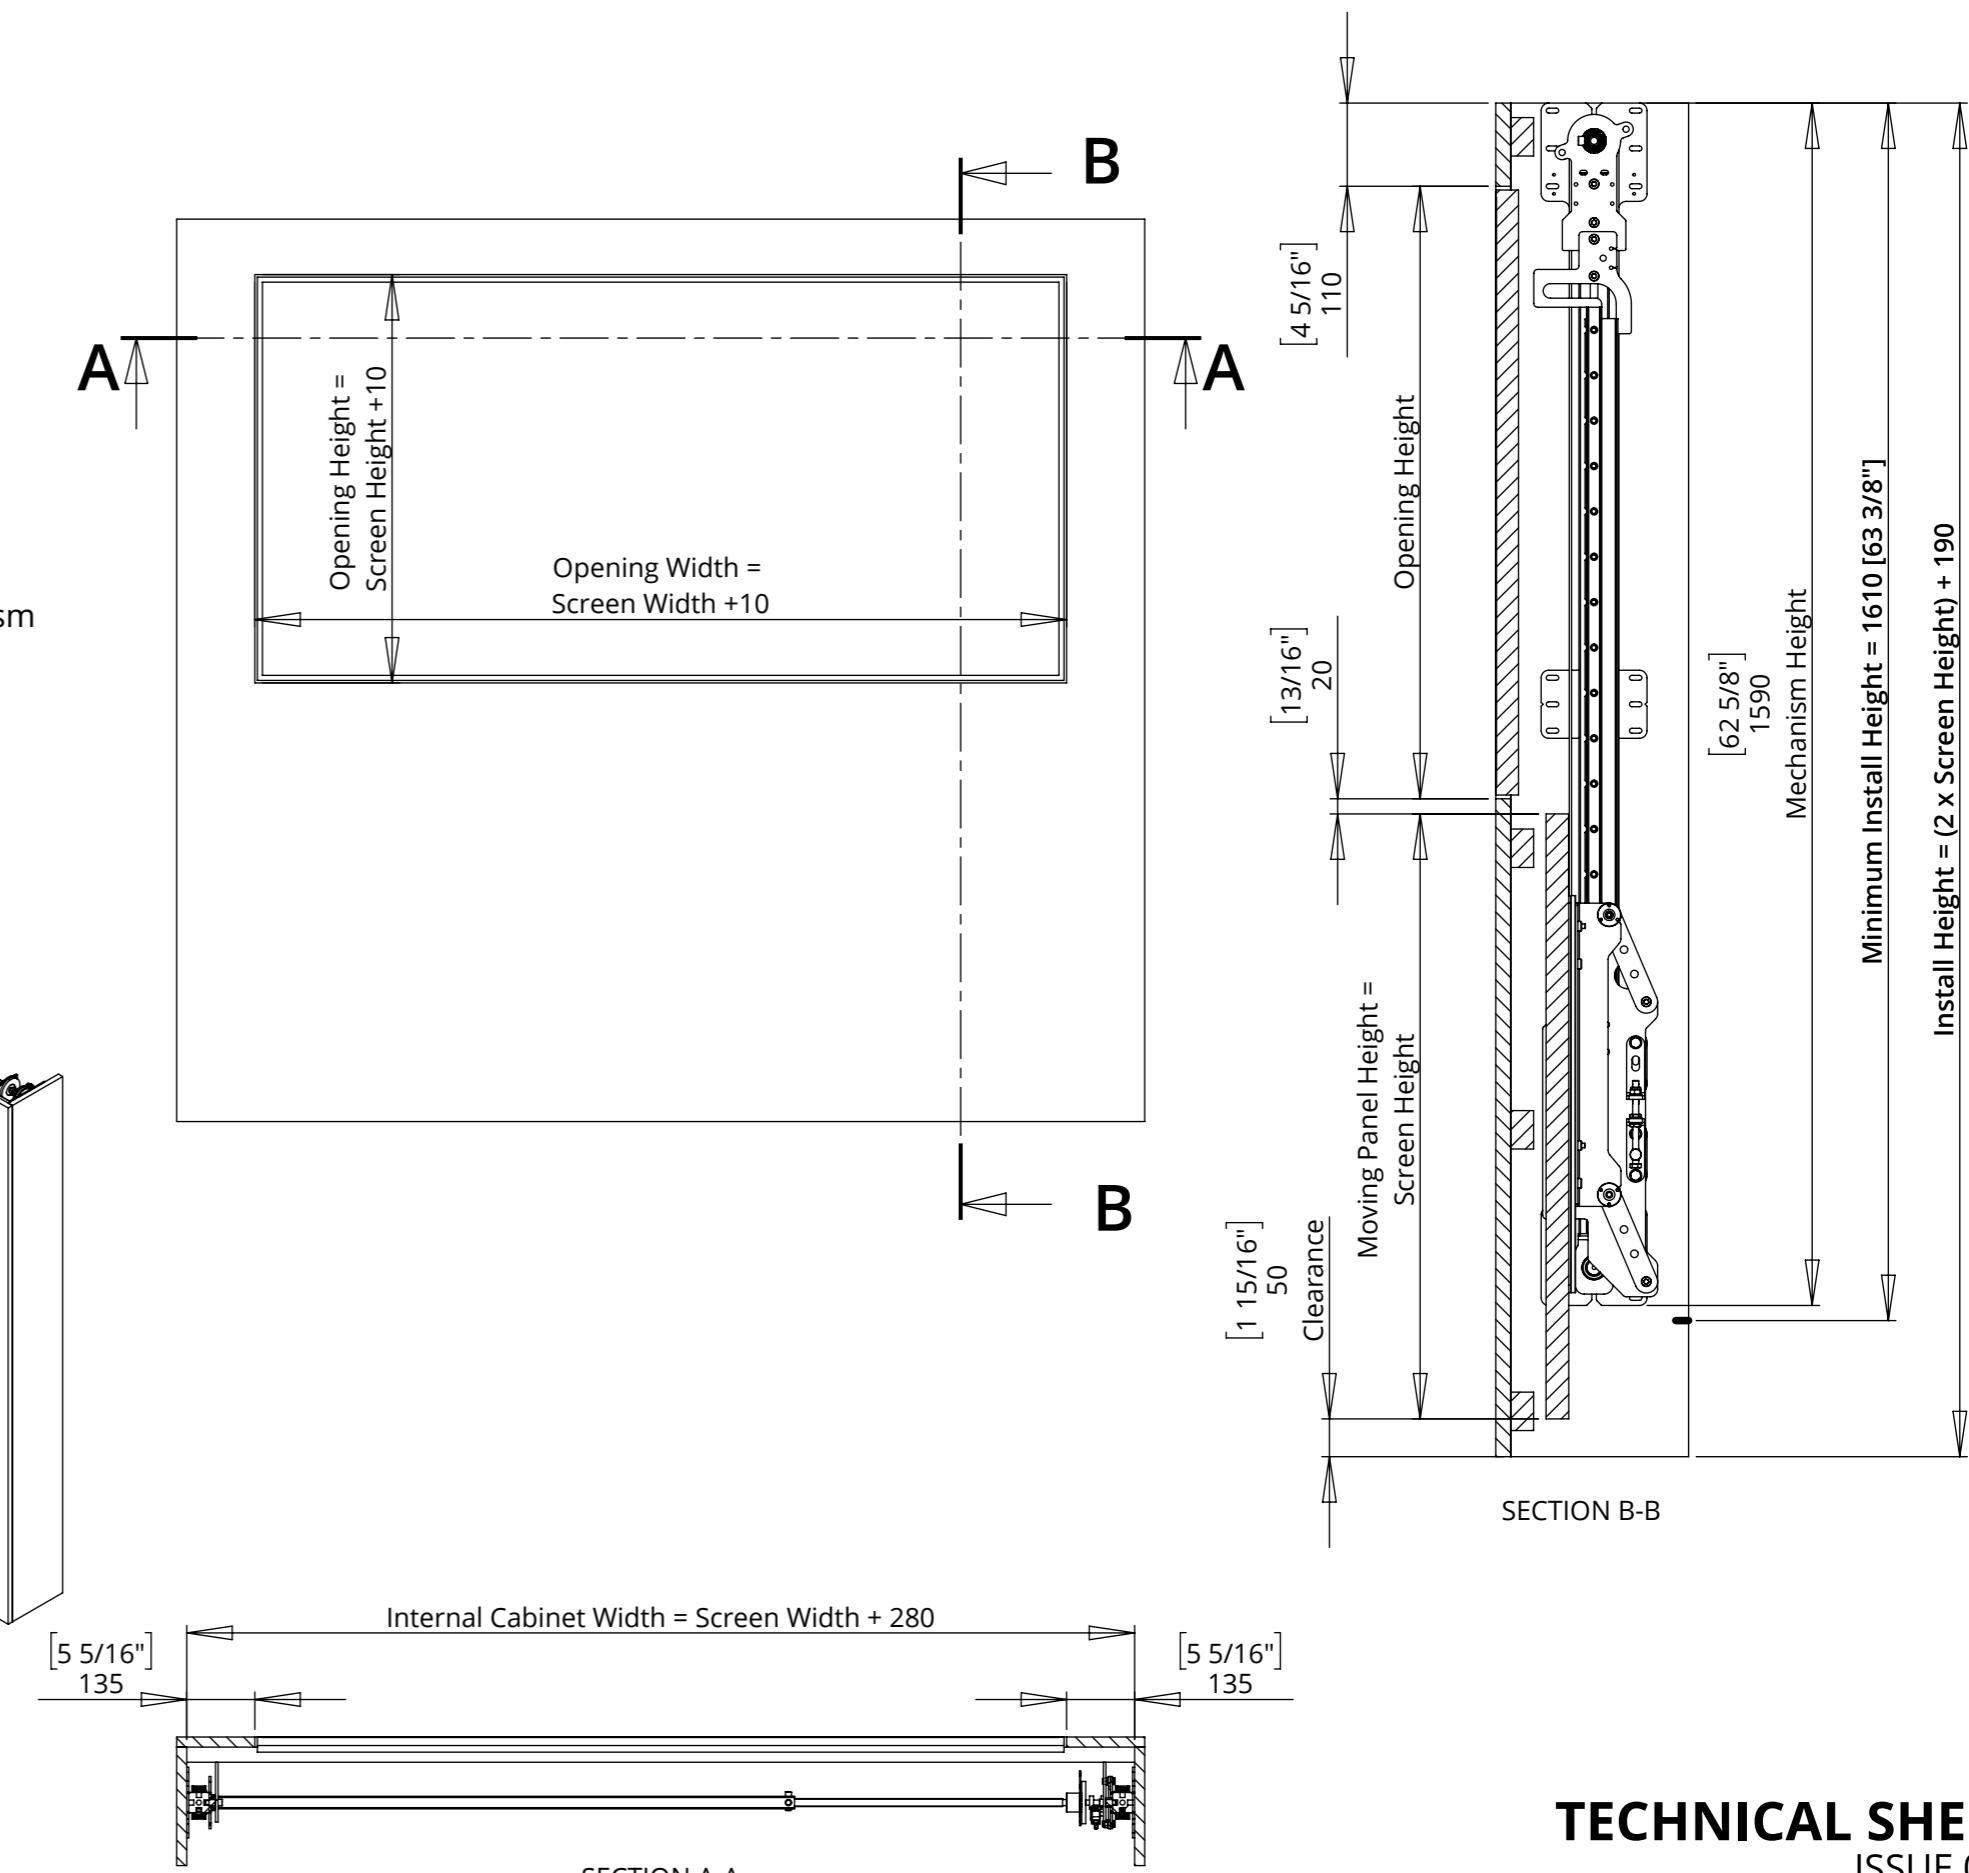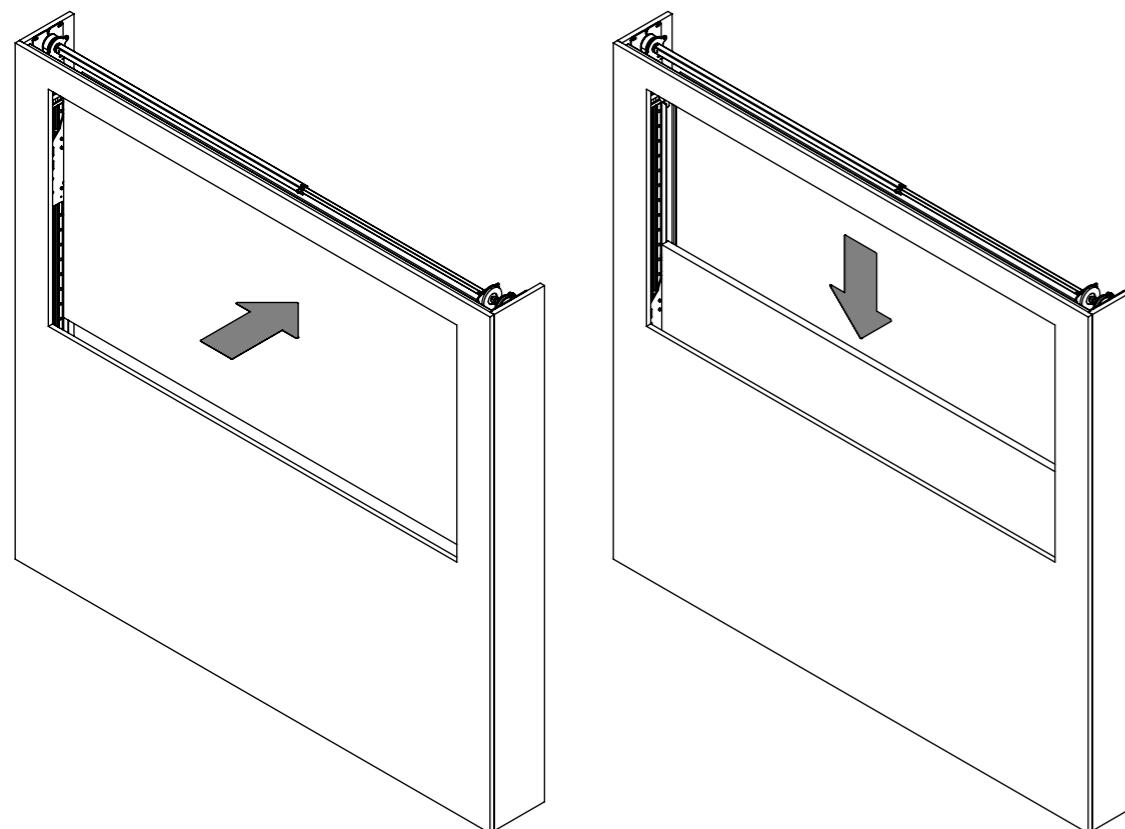


#### AB - ADVANCE BRACKET

The Advance Bracket has a service mode that can be used during installation and servicing of the mechanism and the screen.


This allows the screen to be pulled out from the wall to provide access to rear of the screen and inside the mechanism during fitting.

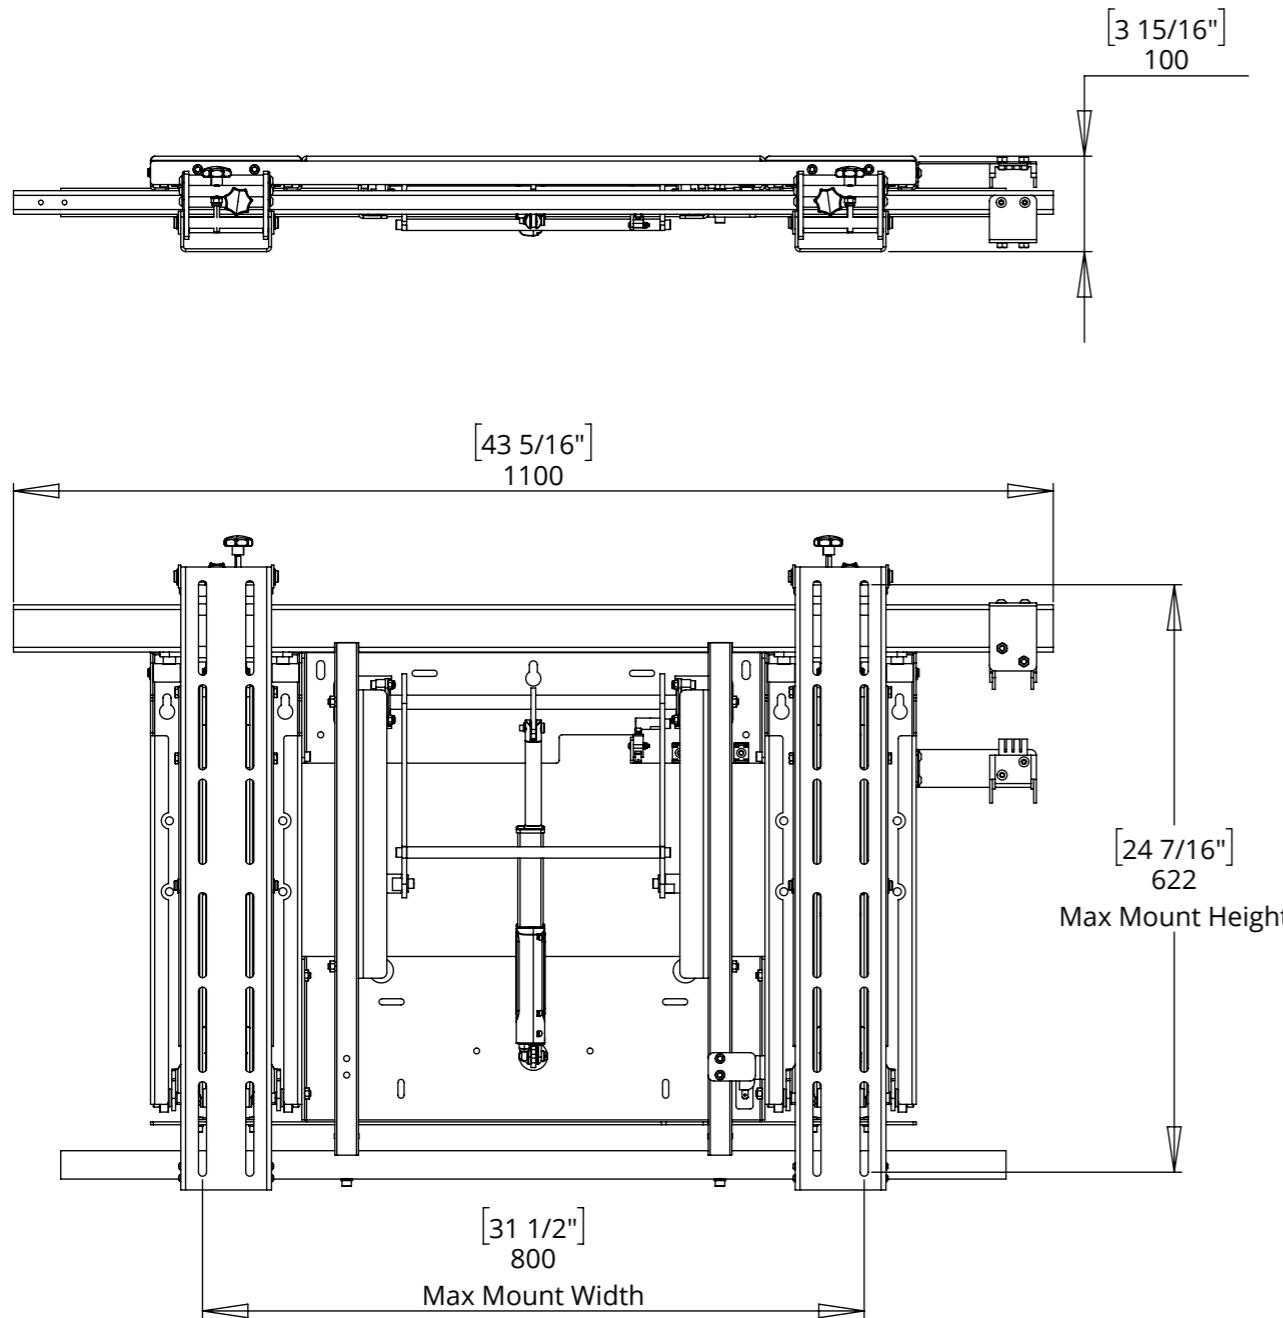


ADVANCE - IN

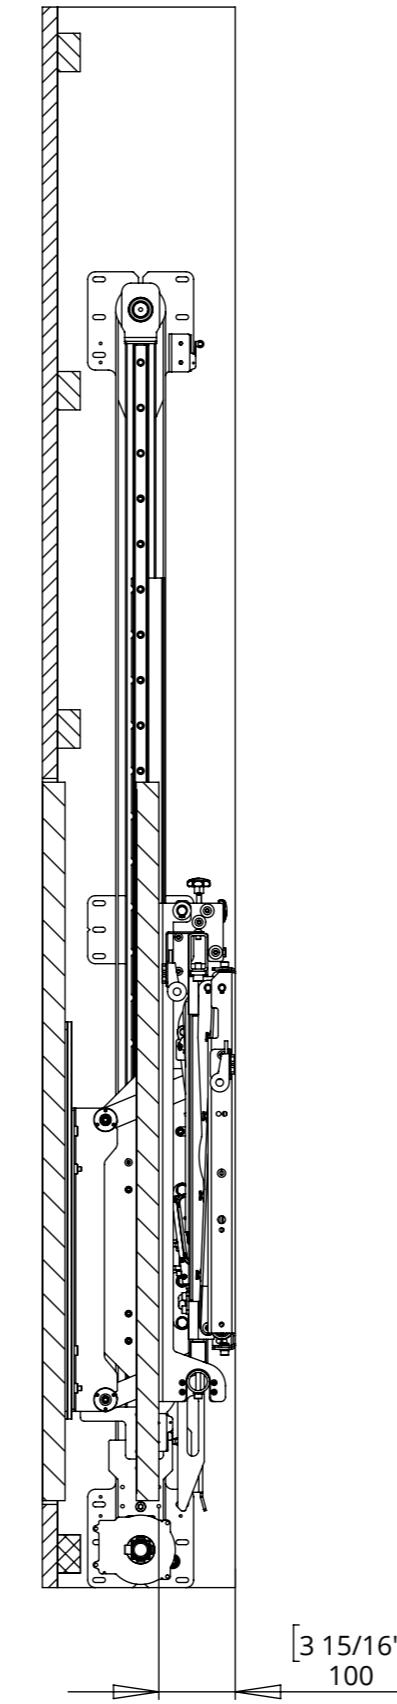



ADVANCE - OUT

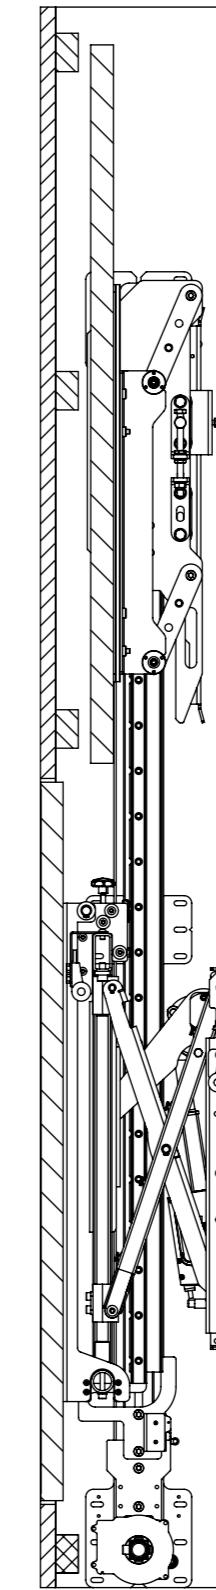

ADVANCE - SERVICE

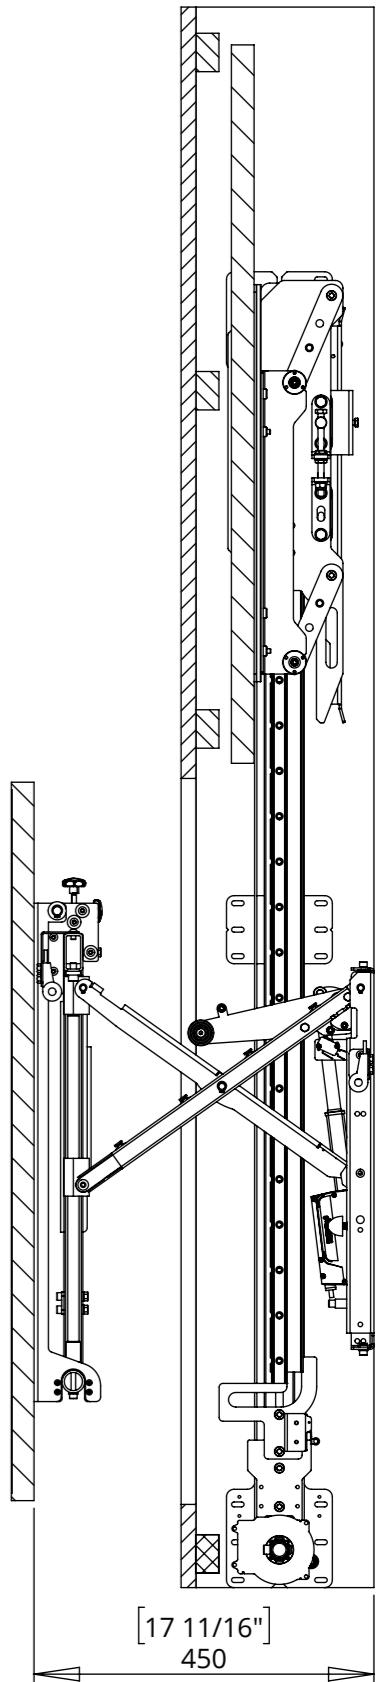

### CONTROL BOX

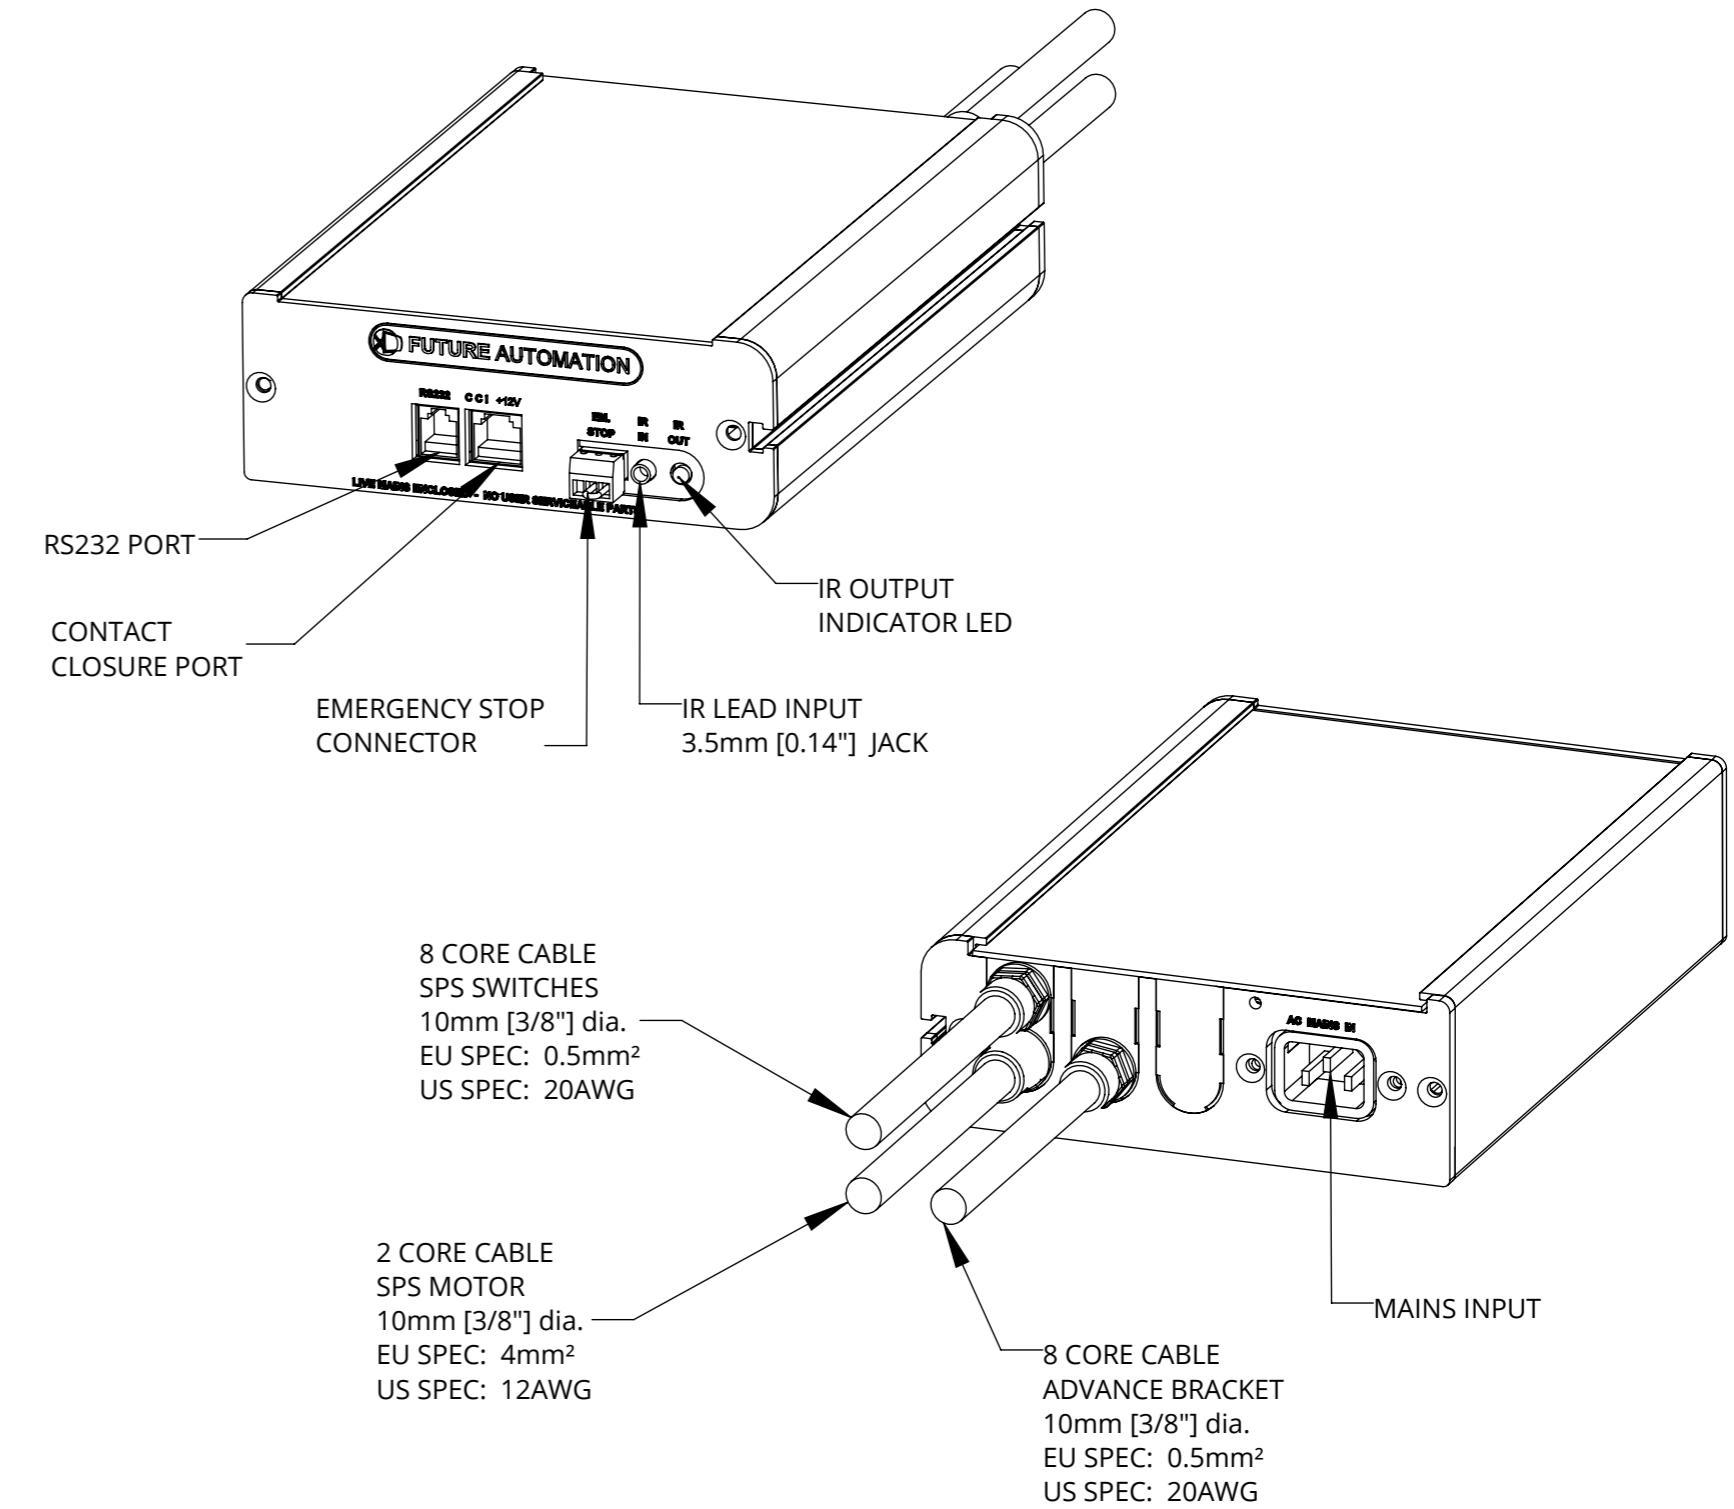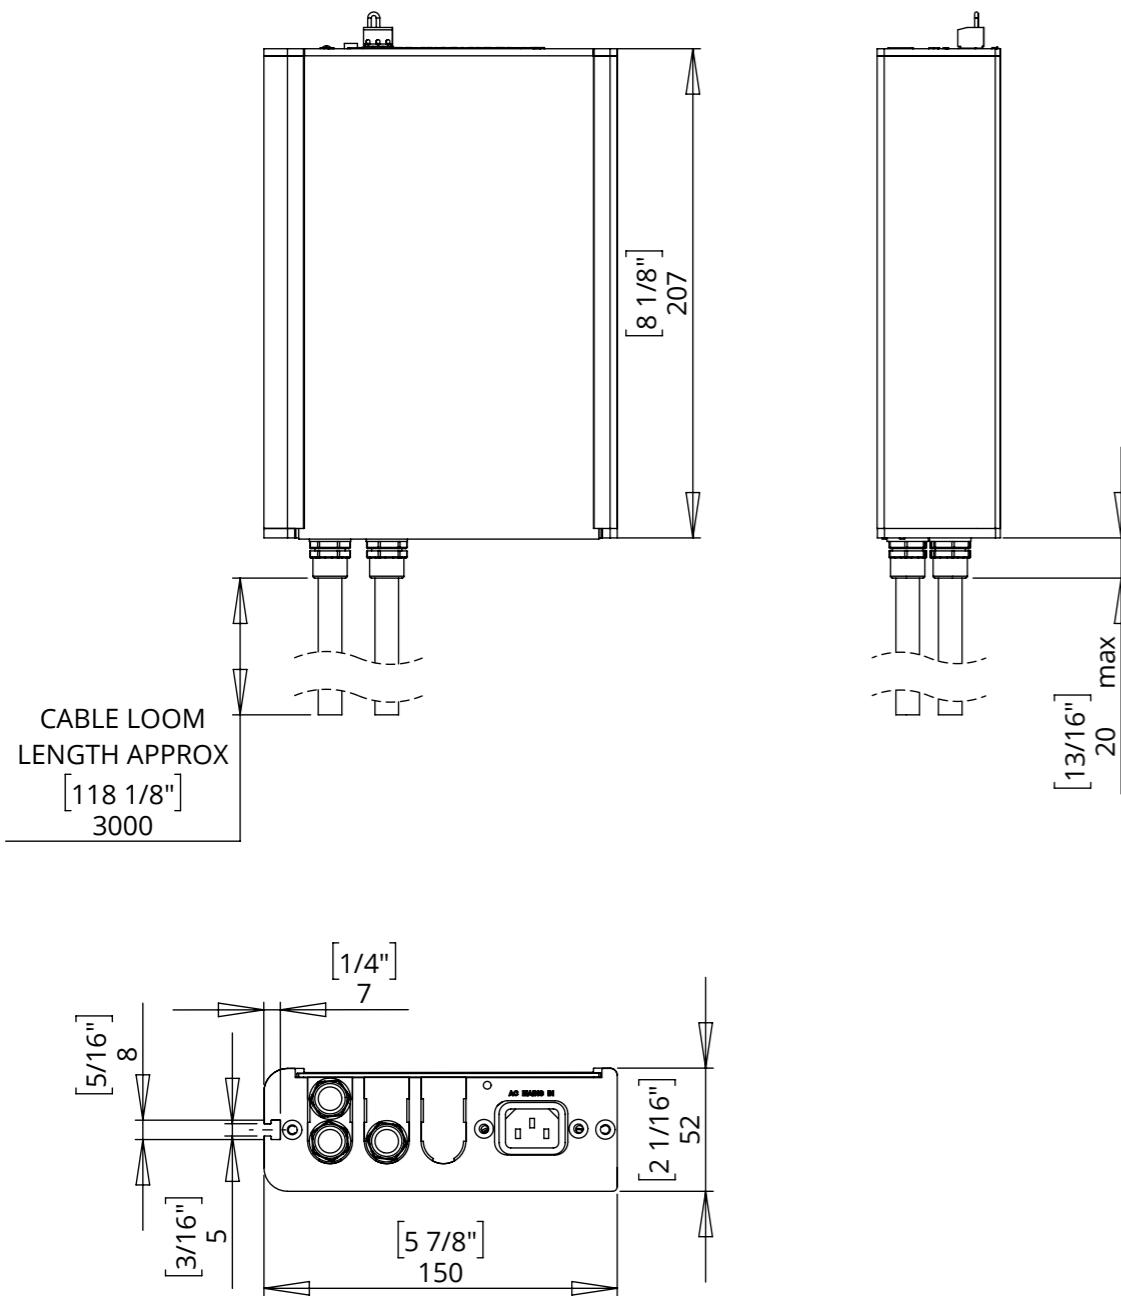

### NOTES

- POWER SUPPLY UNIT (PSU) WILL ALLOW 110V OR 240V AC INPUT. THE SAME PSU IS USED FOR EU OR US MAINS SUPPLIES.
- OTHER THAN CONTROL CABLES, ALL CABLES TERMINATE AT CONTROL BOARD VIA STANDARD PHOENIX CONNECTORS.
- CABLE LOOM LENGTH SUPPLIED AT APPROX. 3m [118"]. LOOM CAN BE EXTENDED UP TO MAXIMUM OF APPROX. 10m [400"].
- MINIMUM CABLE BEND RADIUS 25mm [1"].

### CABINET DETAILS & ACCESS


The SPS mechanism requires certain access for installation and to be serviced.

For installation the top panel must be removable to provide access to all the fixing points of the SPS mechanism.


For servicing the best option is to have the areas to the left and right of the opening on hinges. This will provide enough access to everything that will be needed to service and maintain the mechanism. Alternatively the side panels could be made to be easily removable on suitable catches / fixings.

The Moving Panel Mechanism mounts to the side walls of the cabinet, and the Advance Bracket mounts to the back of the cabinet. It is essential that these surfaces can take the weight of the mechanism, moving panel and screen.

The mechanism is supplied with a control box on a 3m [10'] flying lead. This must be fitted in an easily accessible location. This will be the first item to be checked if there is an issue with the mechanism. Mains power and control connections (IR sensor / receiver, contact closure, RS232) are all made at the control box.

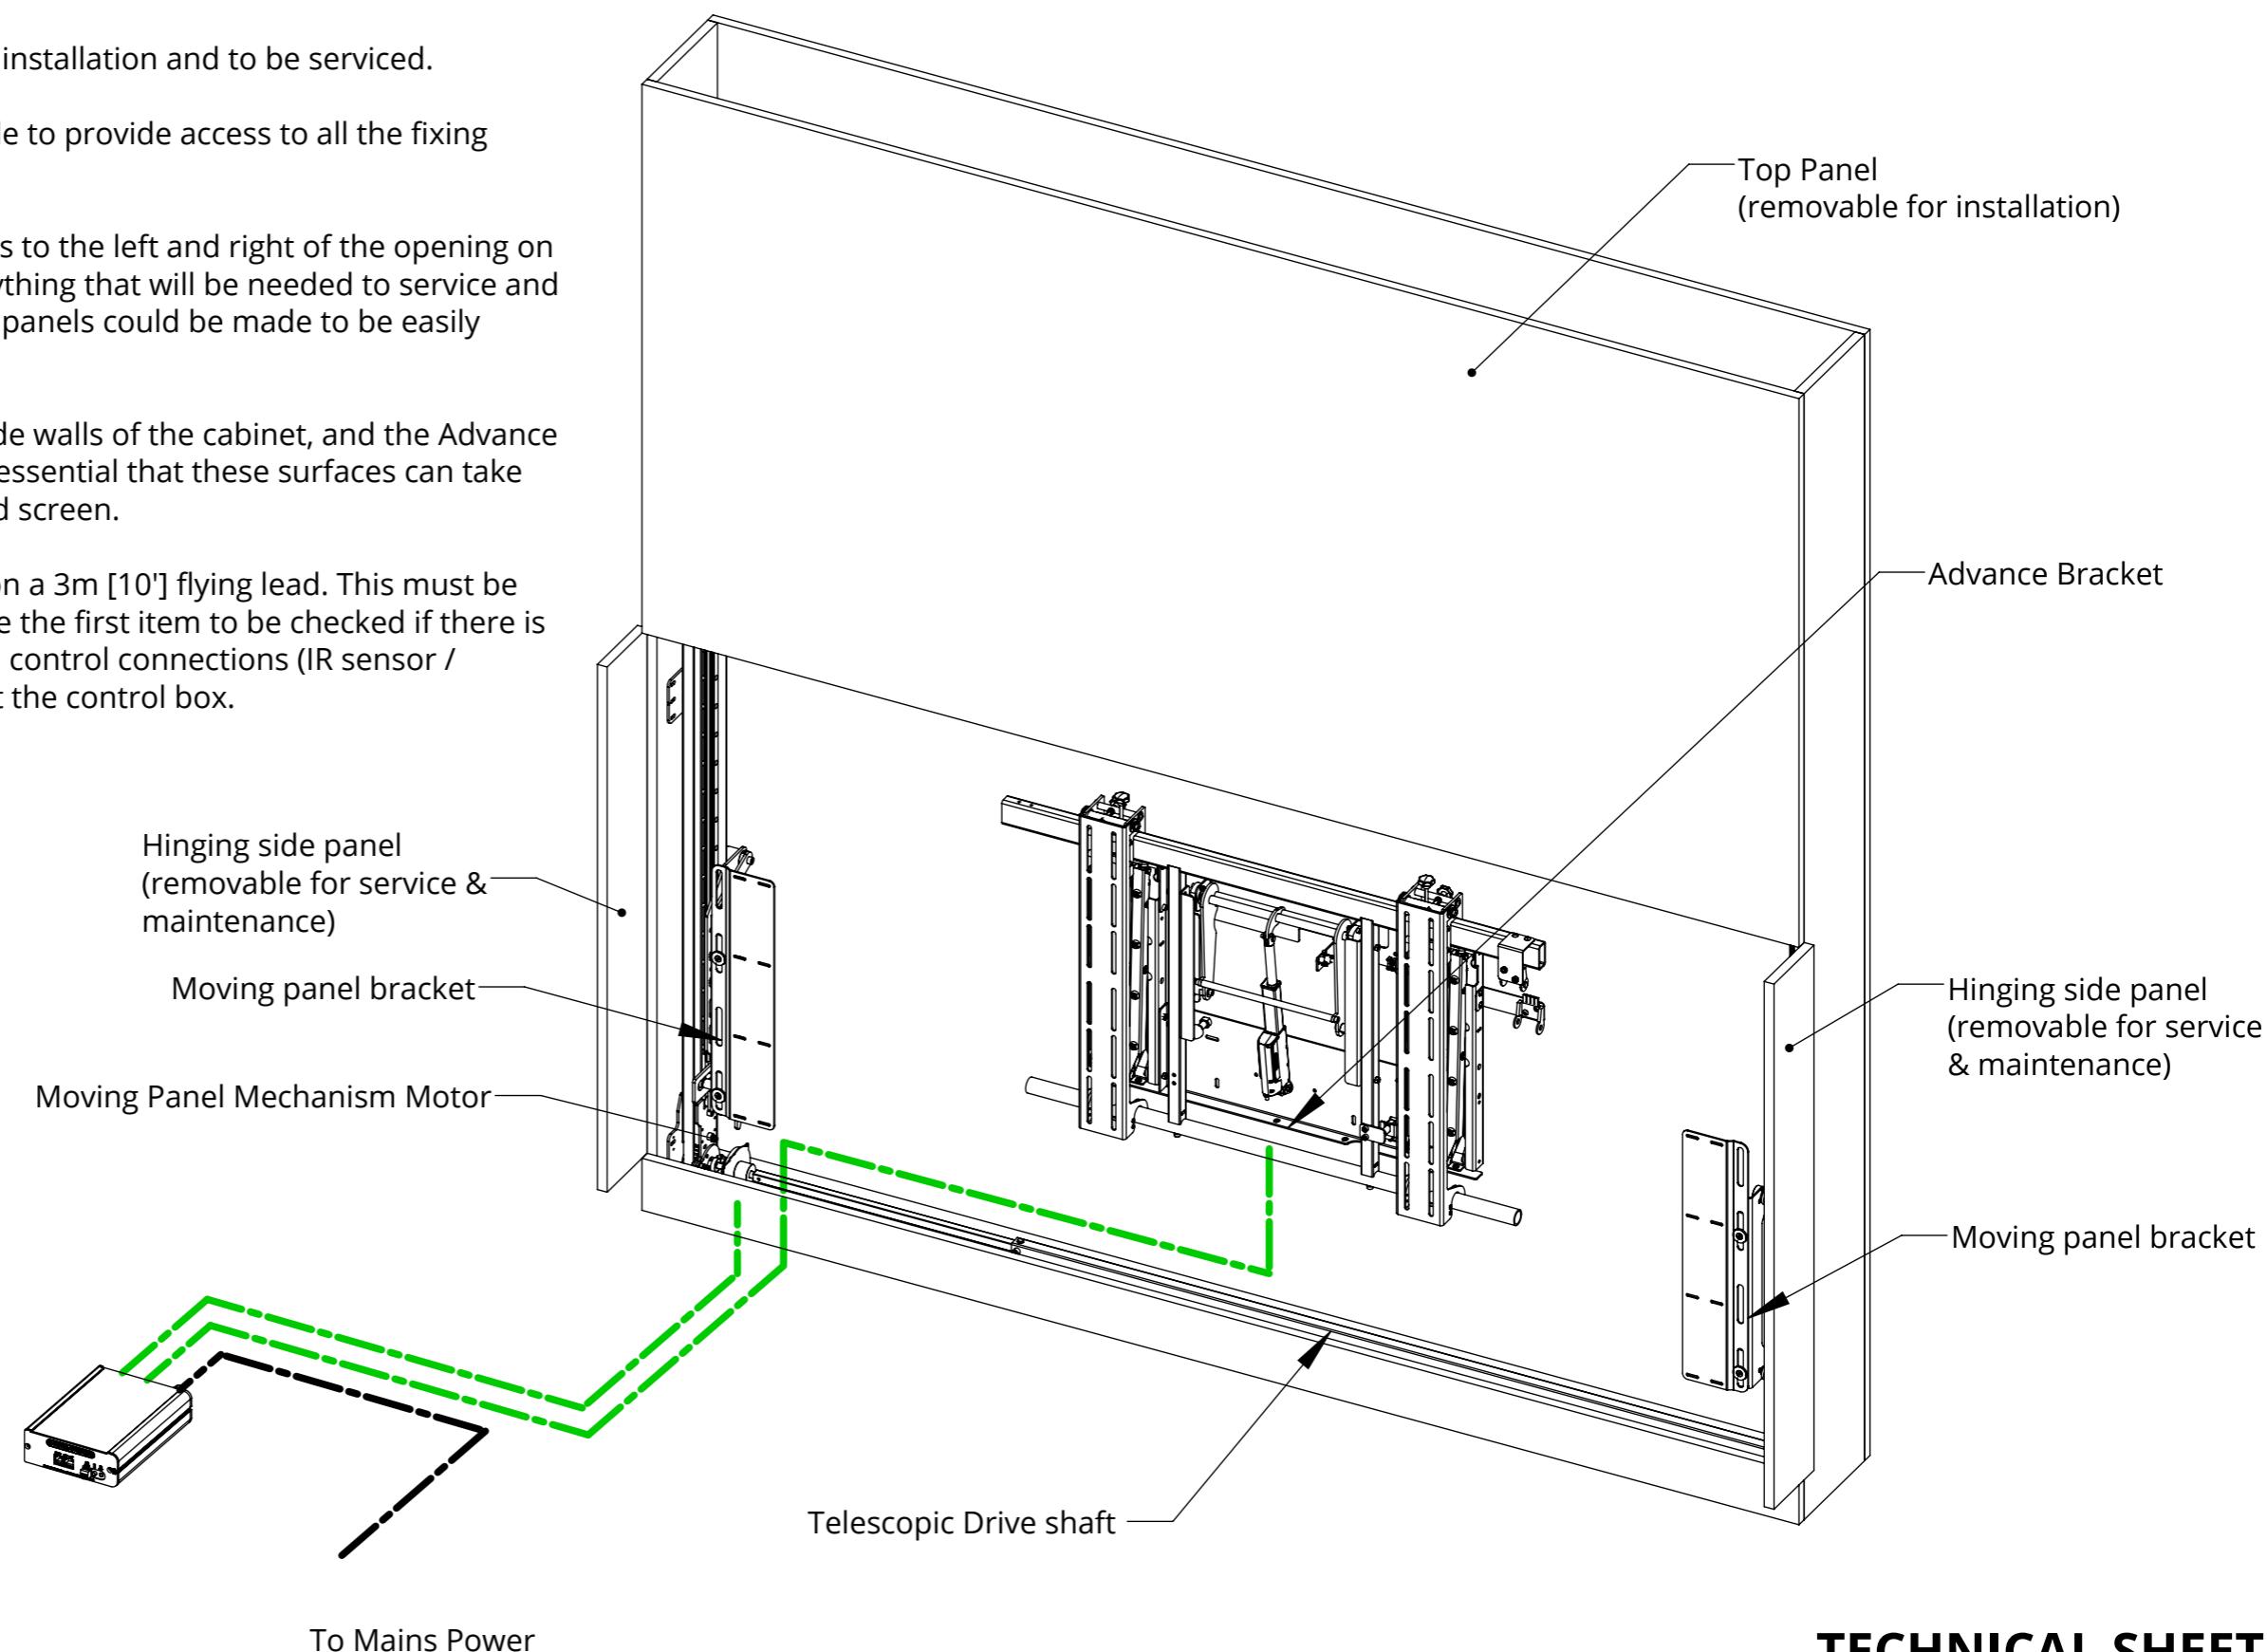


#### INSTALLATION OVERVIEW

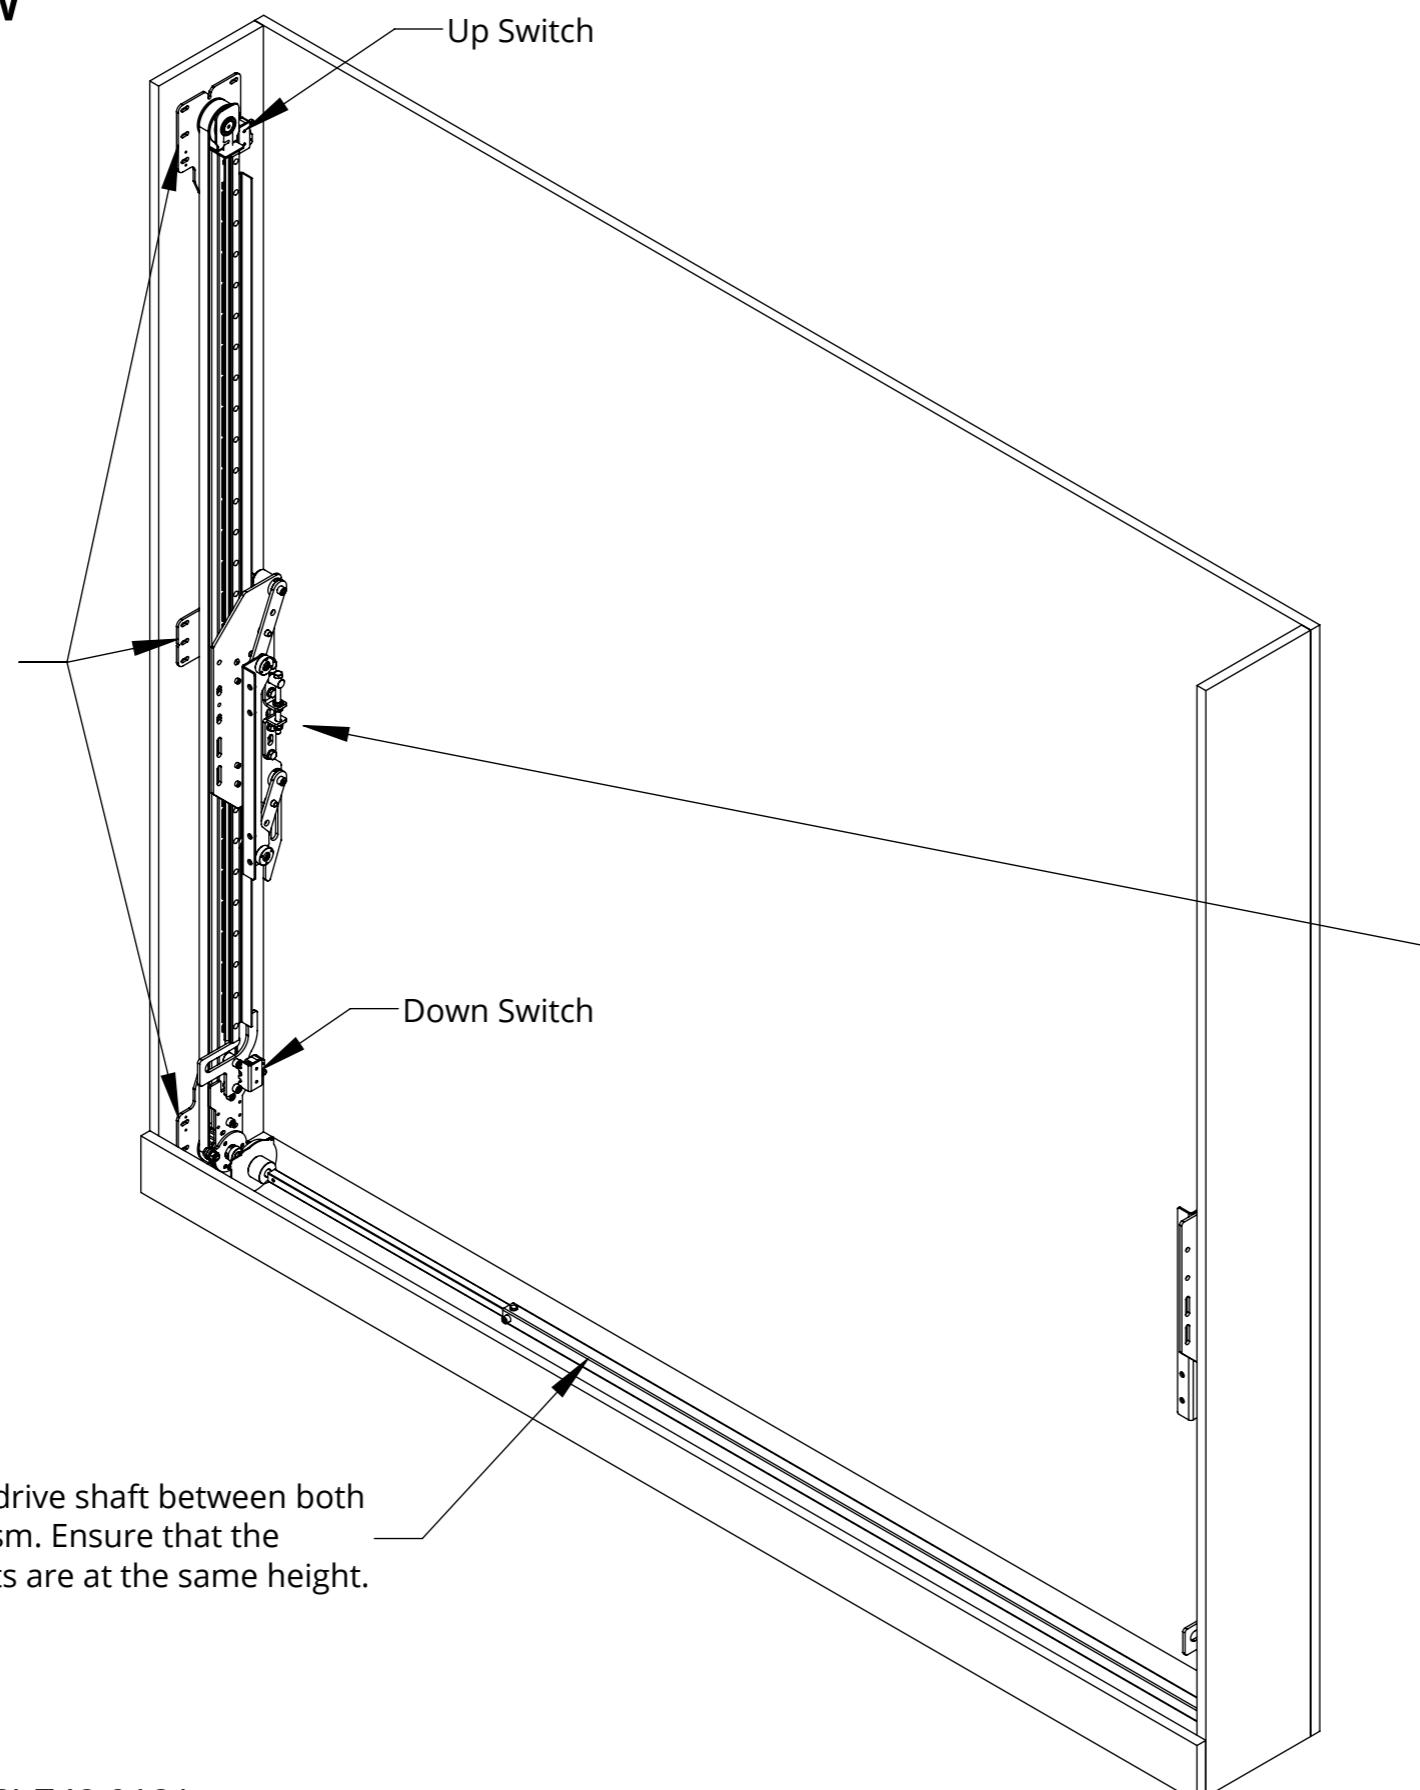


3. Run the mechanism, adjust the up switch so that the carriages moves the height of the moving panel + 25mm [1"].

Rear View

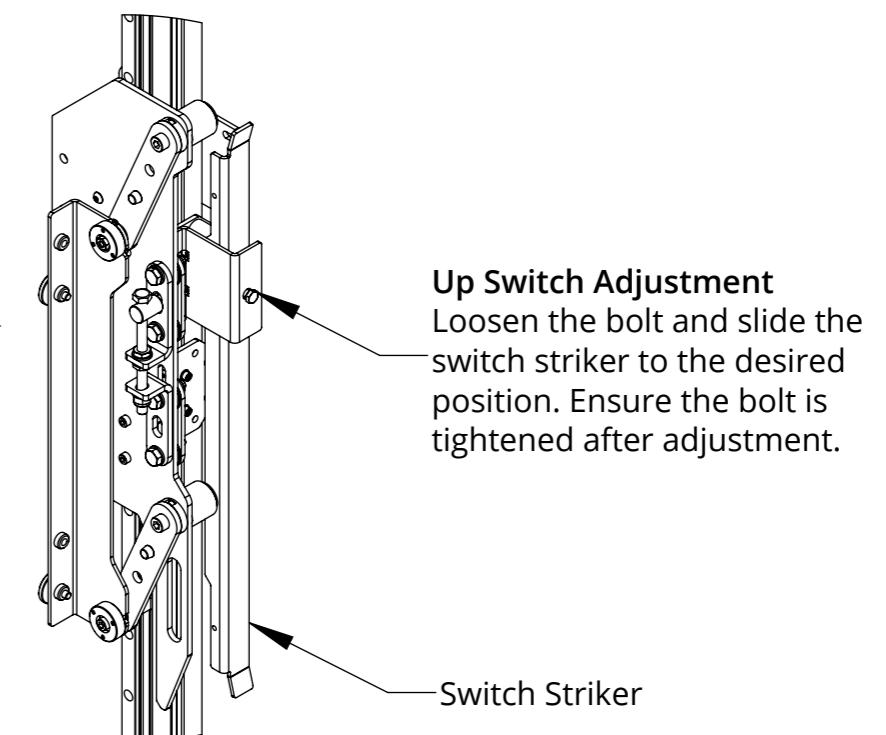

#### INSTALLATION OVERVIEW

4. Mount the moving panel to the moving panel brackets 110mm from the base of the moving panel and 94mm in from the edge.

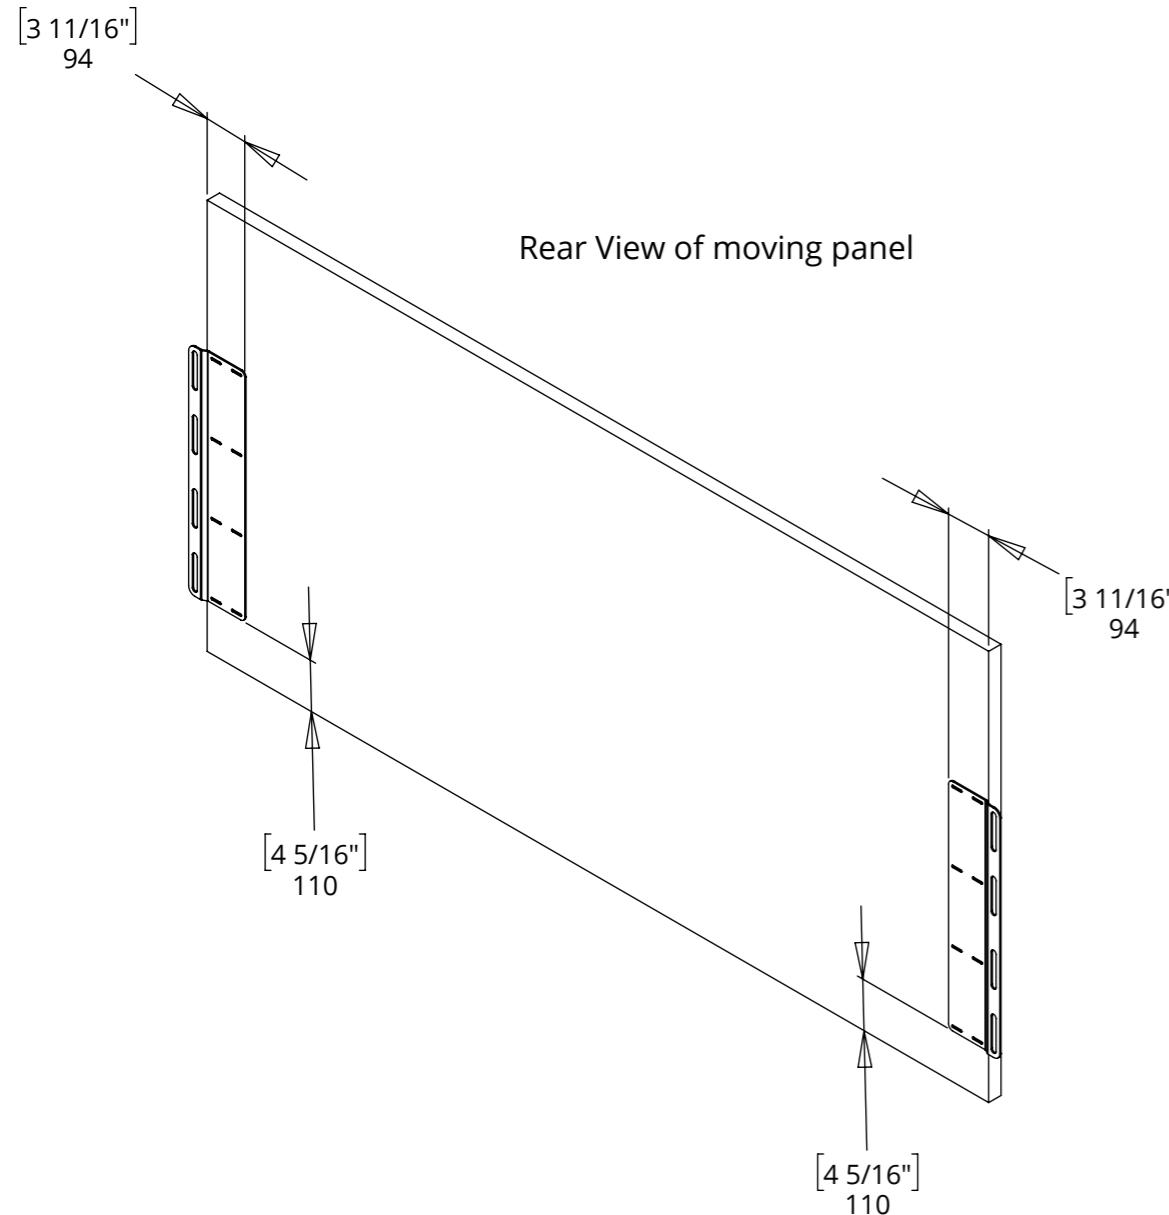

5. Mount the moving panel back onto the mechanism, use the slots in the mount brackets to align the panel and get it into the desired position.

