

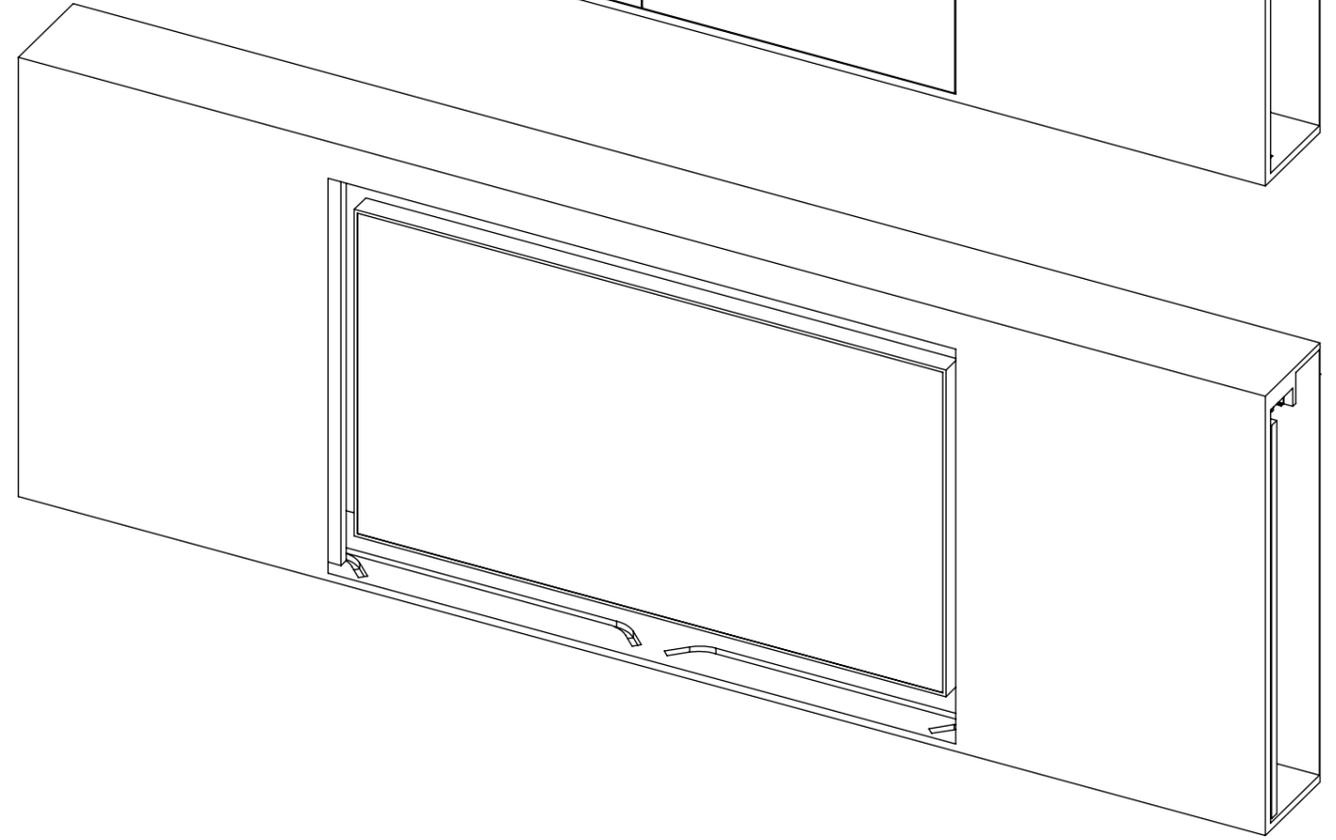
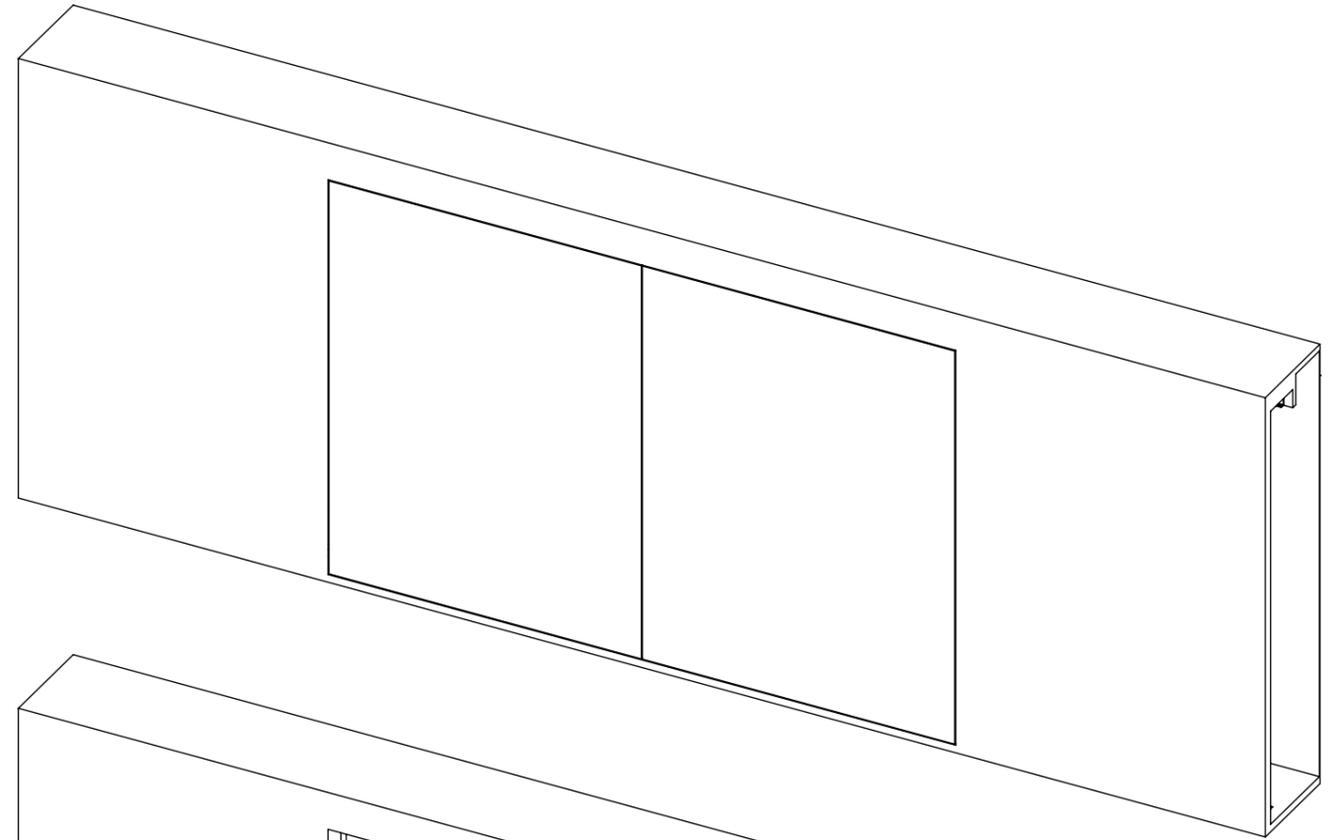


# MDM-RS-8

## MOVING DOOR MECHANISM RETRACT & SPLIT

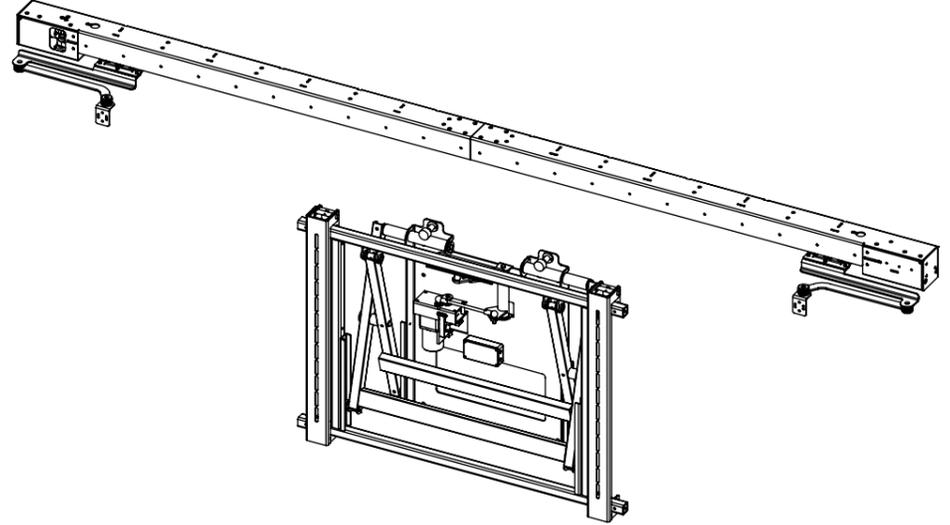

future automation

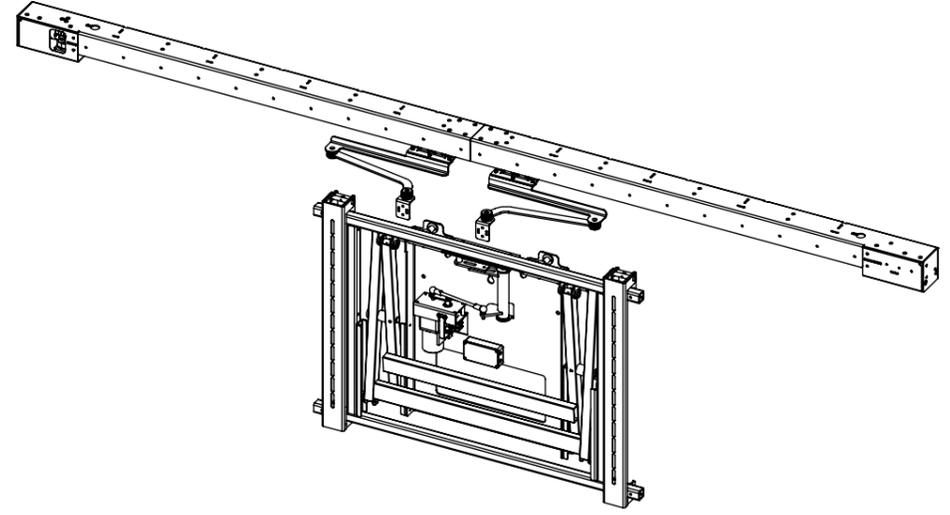

# MDM-RS-8

## MOVING DOOR MECHANISM RETRACT & SPLIT




future automation

SPECIFICATION	MEASUREMENTS
Product Dimensions	2900mm (114 3/16") W x 261mm (10 1/4") D x 208mm (8 3/16") H
Maximum Screen Size	1930mm (76") W x 1120mm (44 1/8") H
Maximum Weight Capacity (MDM)	70Kg (154lbs) Per Panel
Maximum Weight Capacity (SA)	100Kg (220lbs)
Maximum Speed	150mm/s
Maximum Panel Travel	1980mm (77 15/16")
Product Weight	20Kg (44lbs)
Packaging Dimensions	TBC
Shipping Weight	TBC
Movement Type	Motorised
Power Supply Required	110V - 240V AC
Power Consumption Max.	120W
Power Consumption Standby	3W
Mounting Patterns Supported	VESA 600, 400, 300, 200 W x 600, 400, 300, 200 H
Control Options	IR Remote, RS232, Contact Closure
Product Options / Features	Specific B&O and Loewe mounts / adapters, Custom RAL paint finishes
Package Contents	MDM Mechanism, Screen Advance Heavy, Guide Rails and hangers, IR remote control, Bolt Pack, Control Box
Marine Suitable	No

# MDM-RS-8

## MOVING DOOR MECHANISM RETRACT & SPLIT



### CLOSED DIMENSIONS

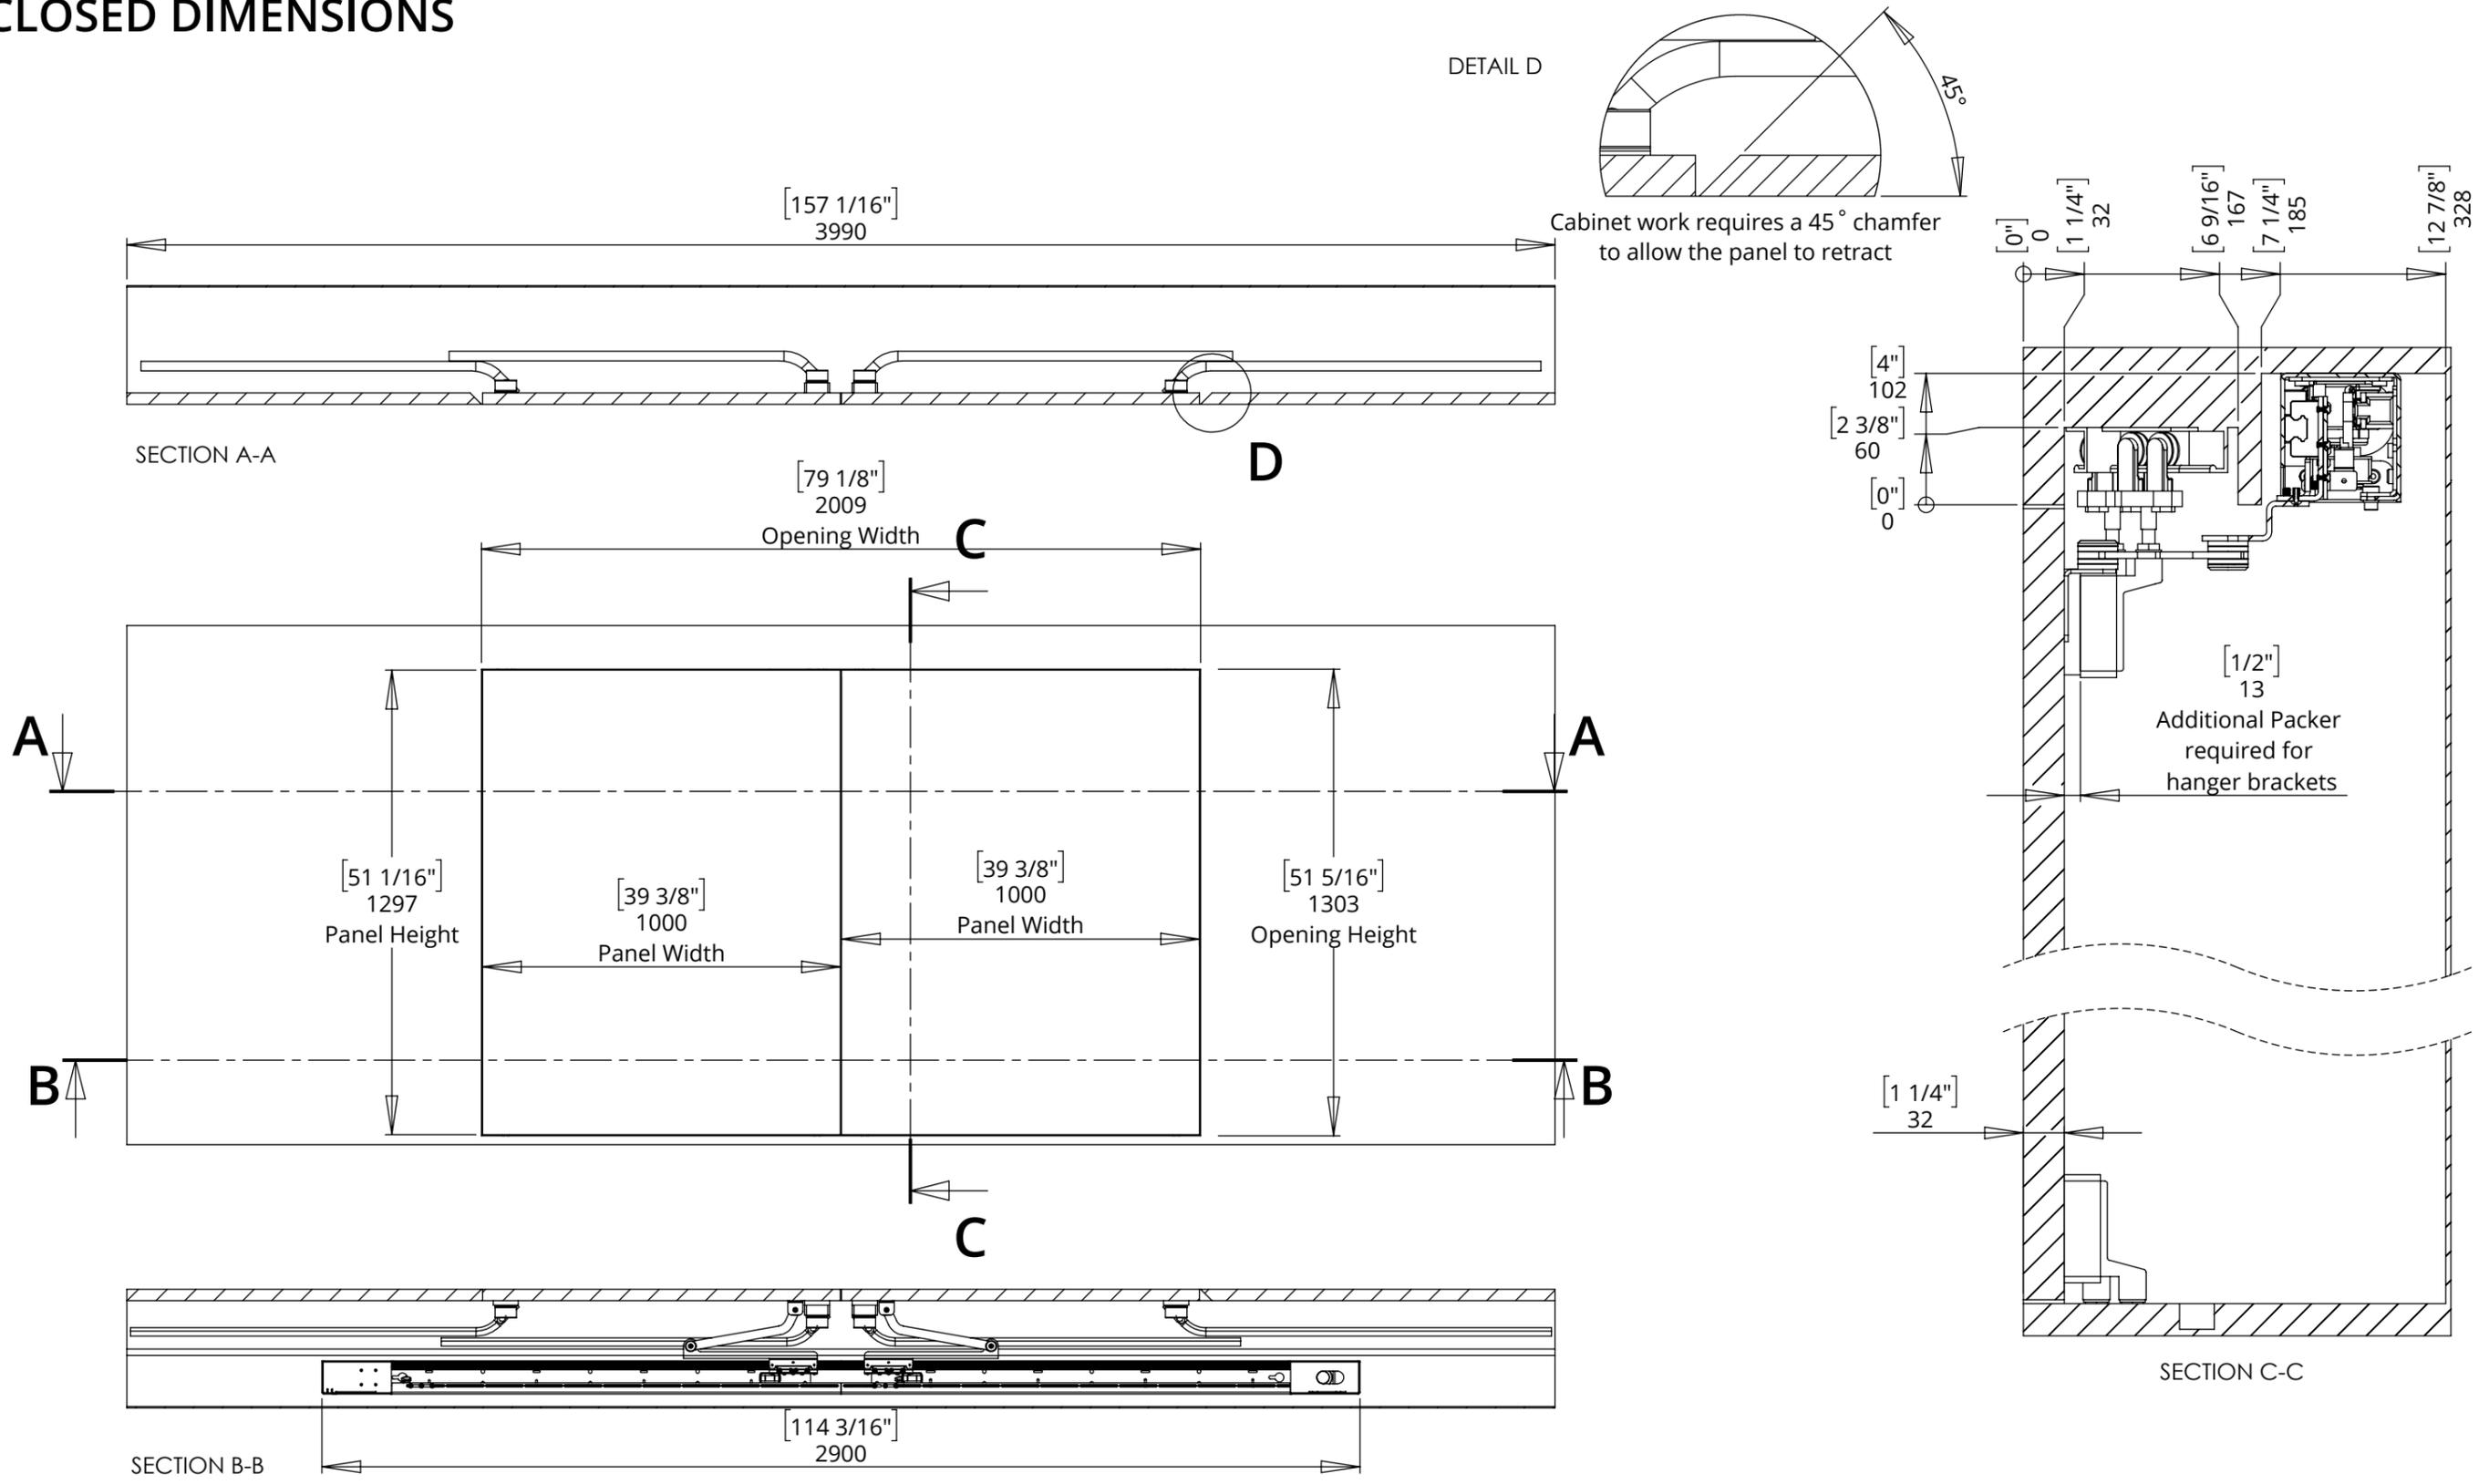

# MDM-RS-8

## MOVING DOOR MECHANISM RETRACT & SPLIT

### OPEN DIMENSIONS

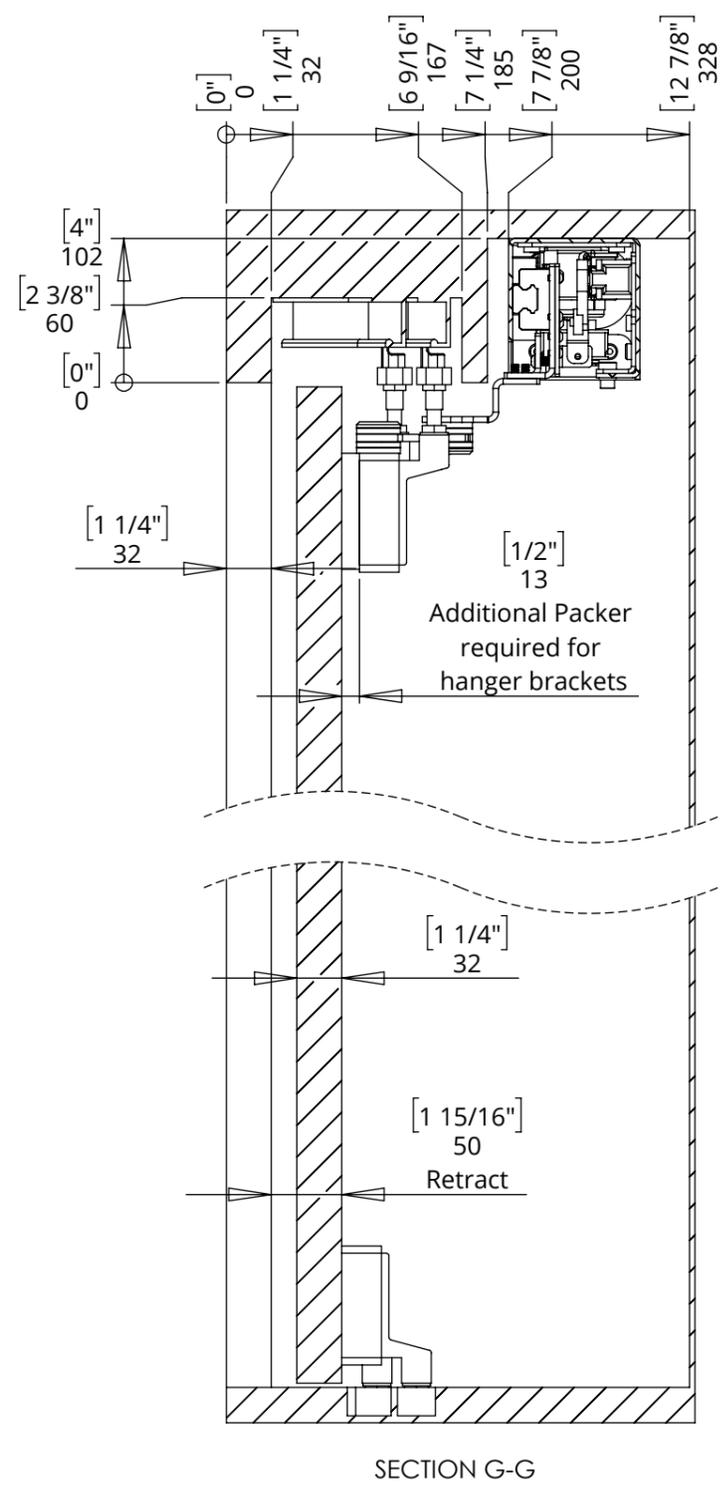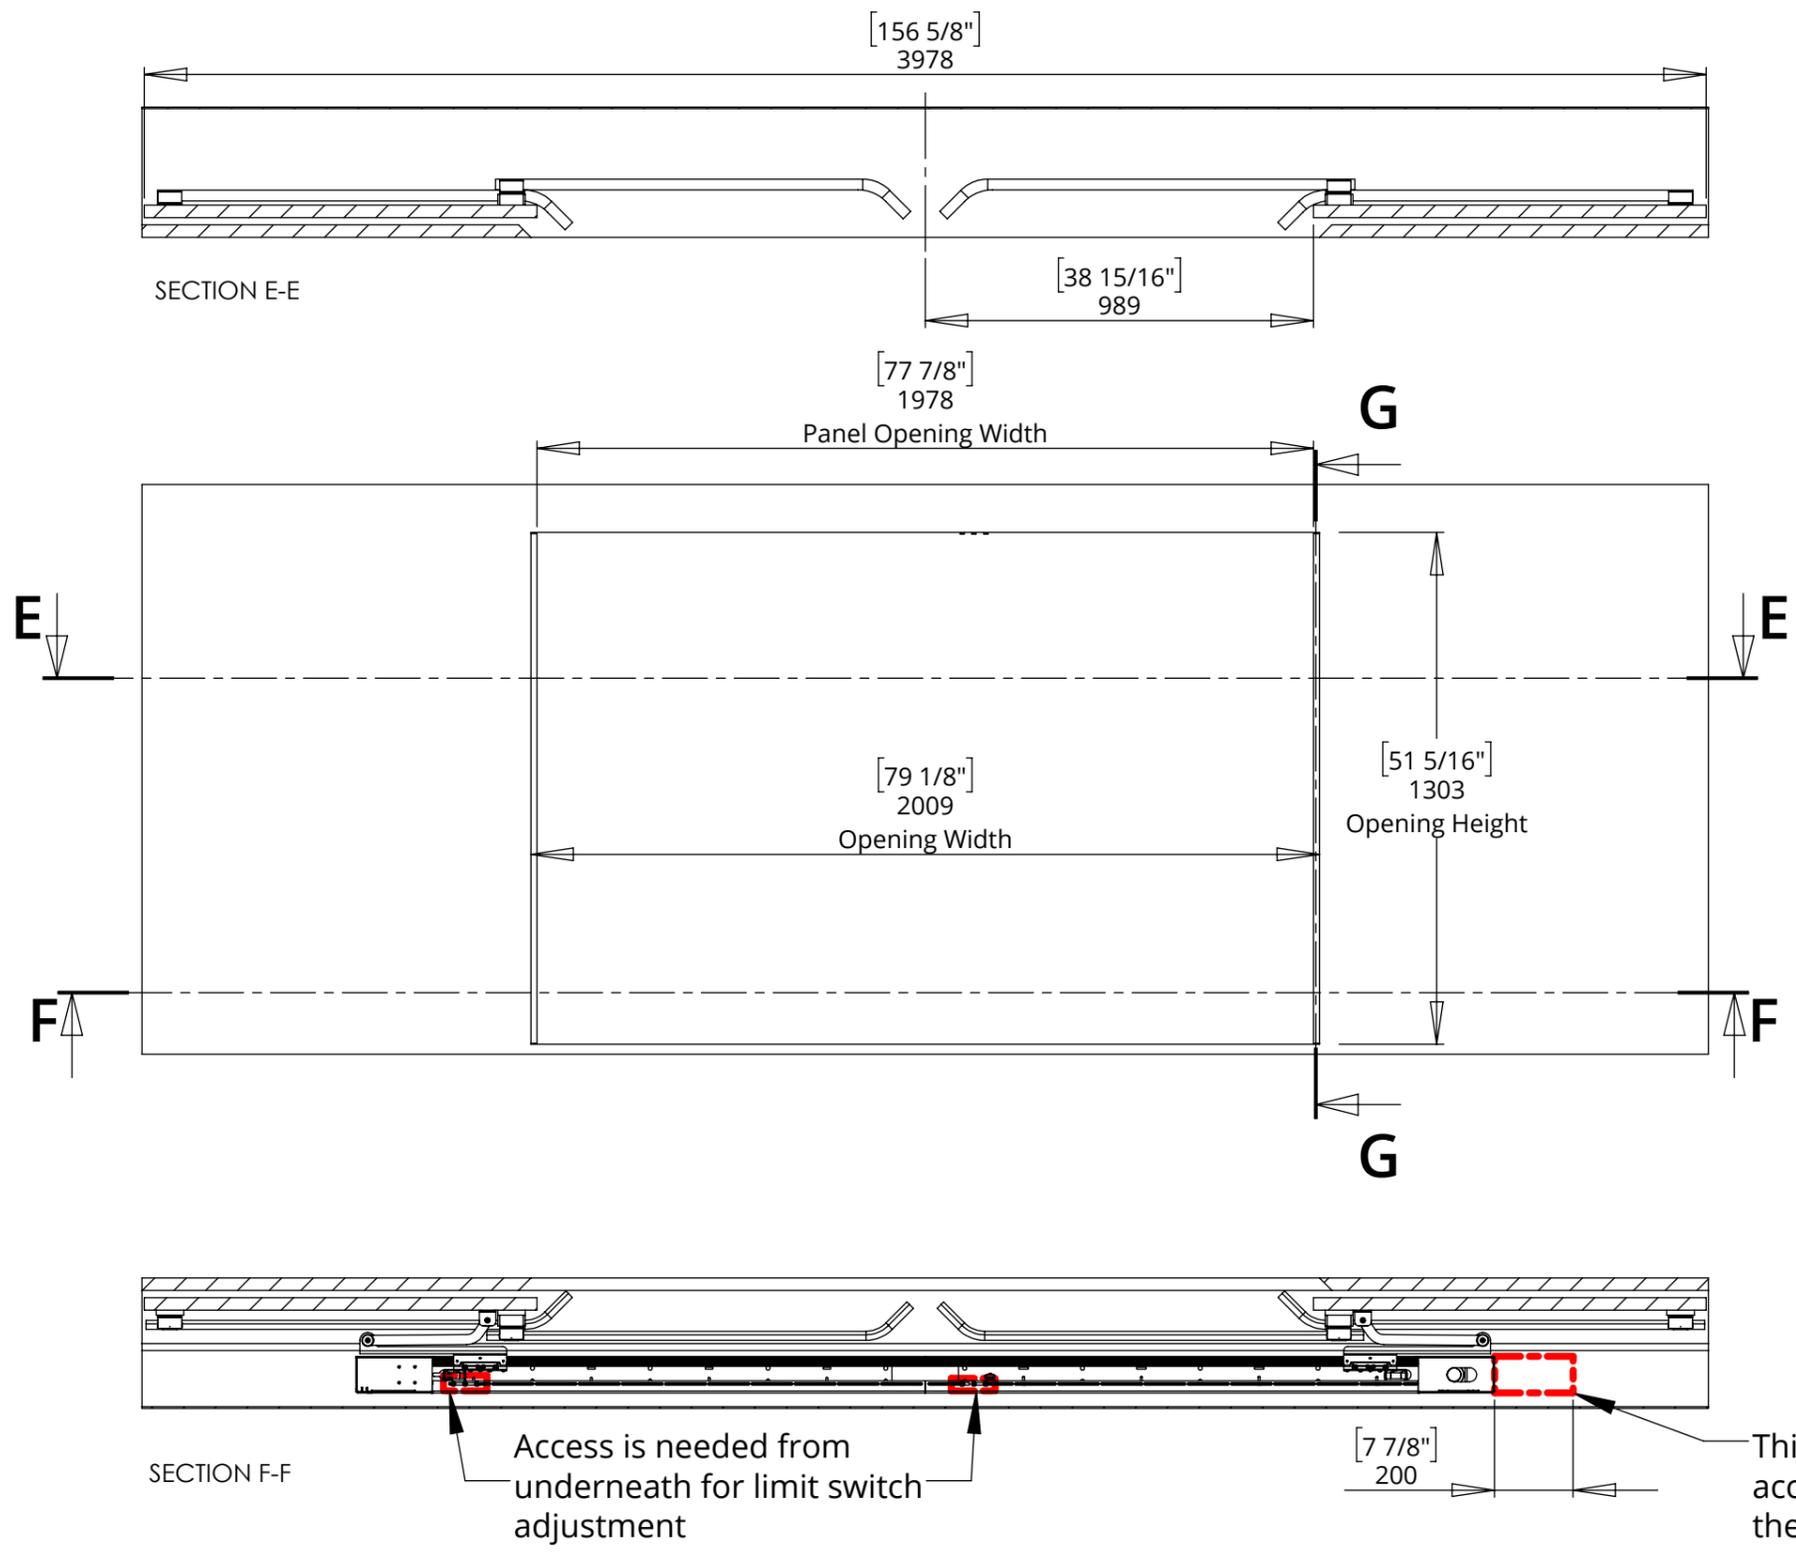

# MDM-RS-8

## MOVING DOOR MECHANISM RETRACT & SPLIT



### CLOSED SCREEN ADVANCE DIMENSIONS

Shown with representative 85" Screen.

The depth of 328mm [12 15/16"] will allow a maximum screen depth of 70mm [2 3/4"].

For screens thicker than 70mm [2 3/4"] the cavity depth must be increased. I.e screen depth of 100mm [3 15/16"] - cavity depth required is 358mm [14 1/8"]

Thinner screens do not allow the cavity to reduce in depth. 328mm [12 15/16"] is the minimum.

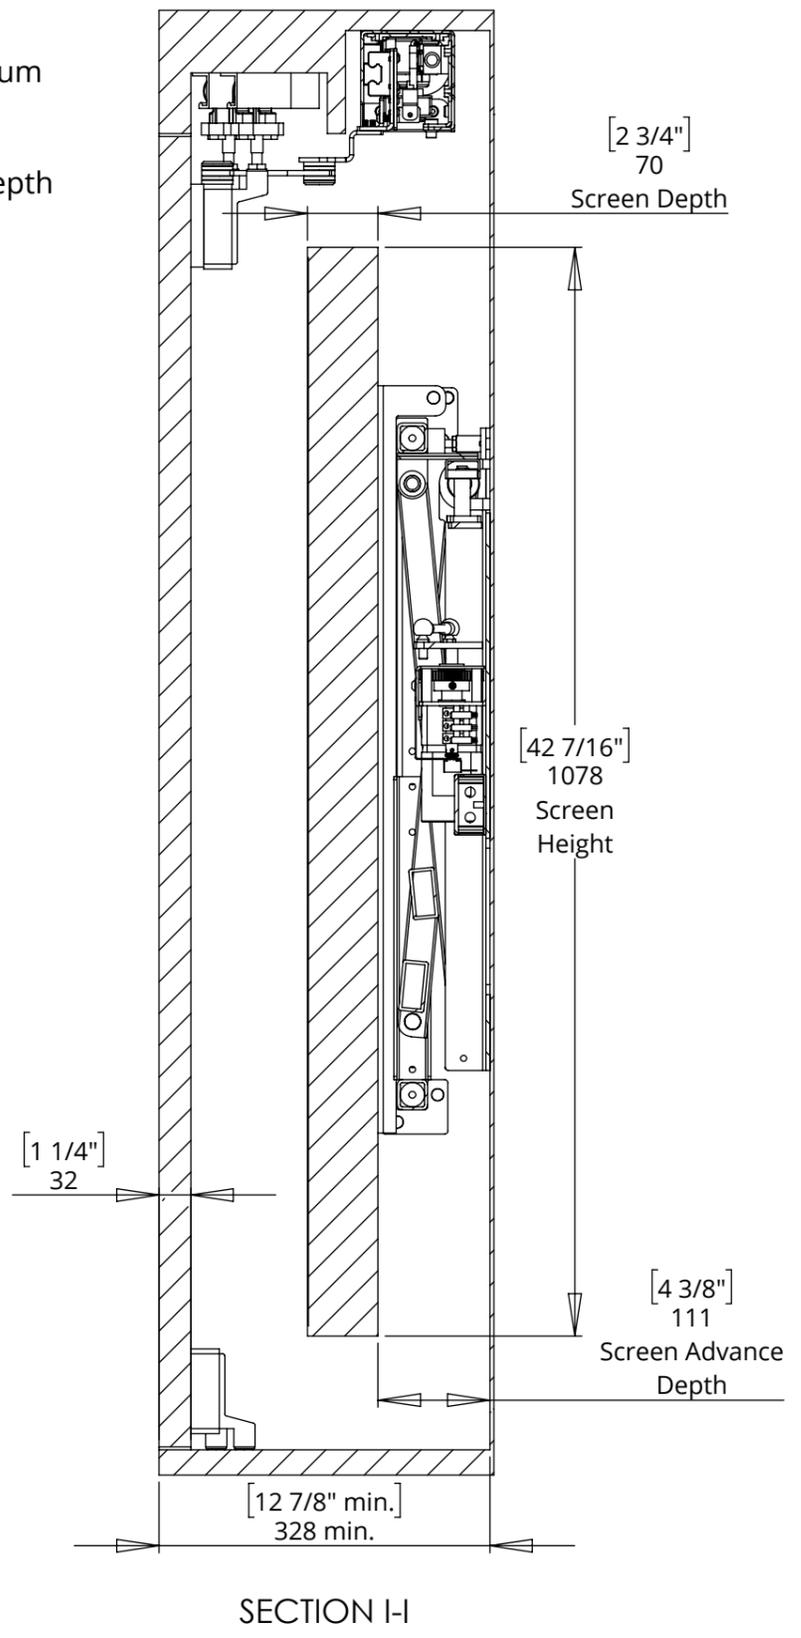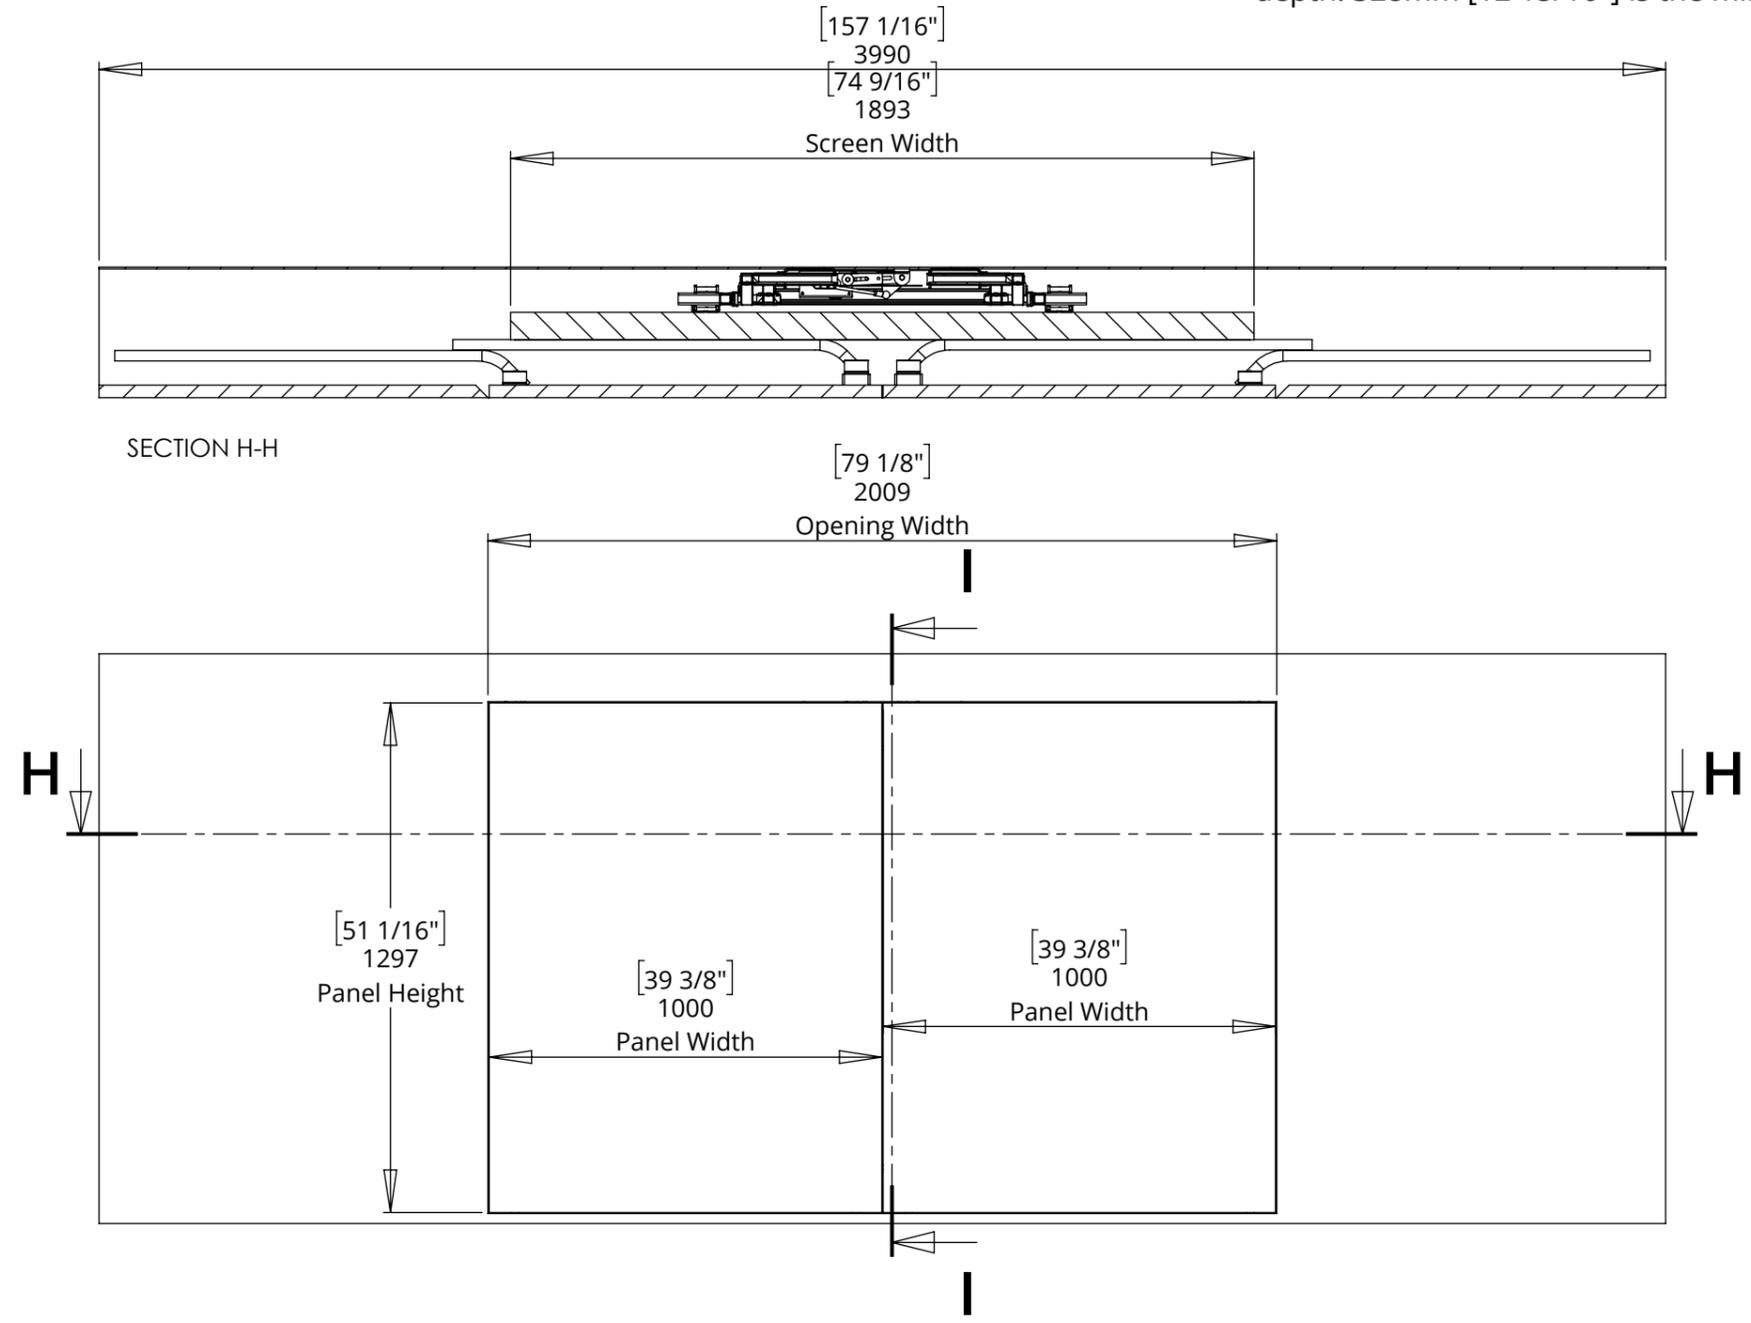

# MDM-RS-8



## MOVING DOOR MECHANISM RETRACT & SPLIT



future automation

### PANELS OPEN SCREEN ADVANCE BACK DIMENSIONS

Shown with representative 85" Screen.

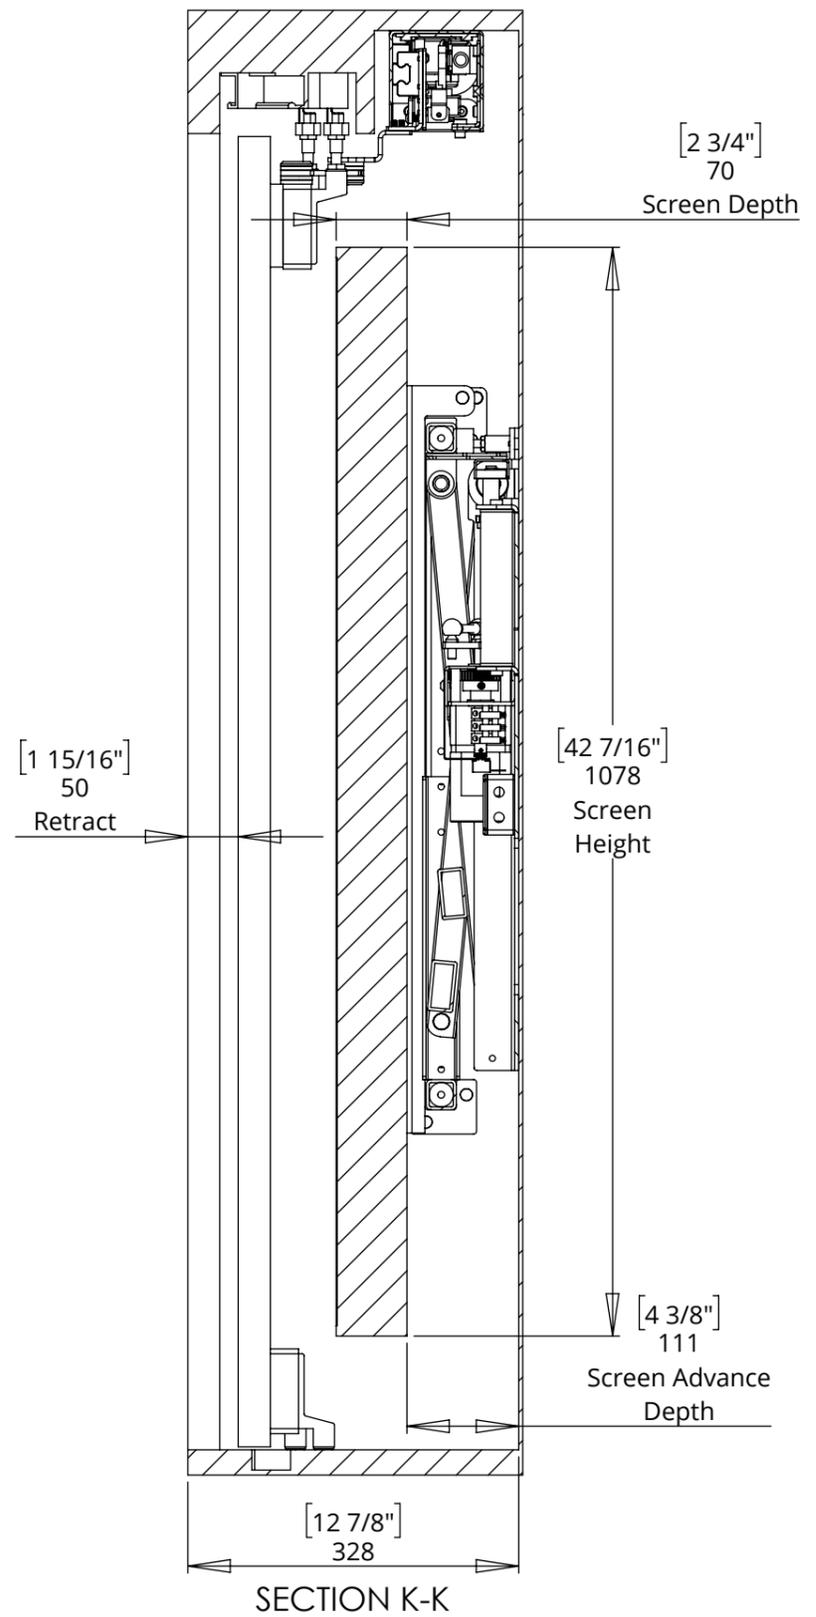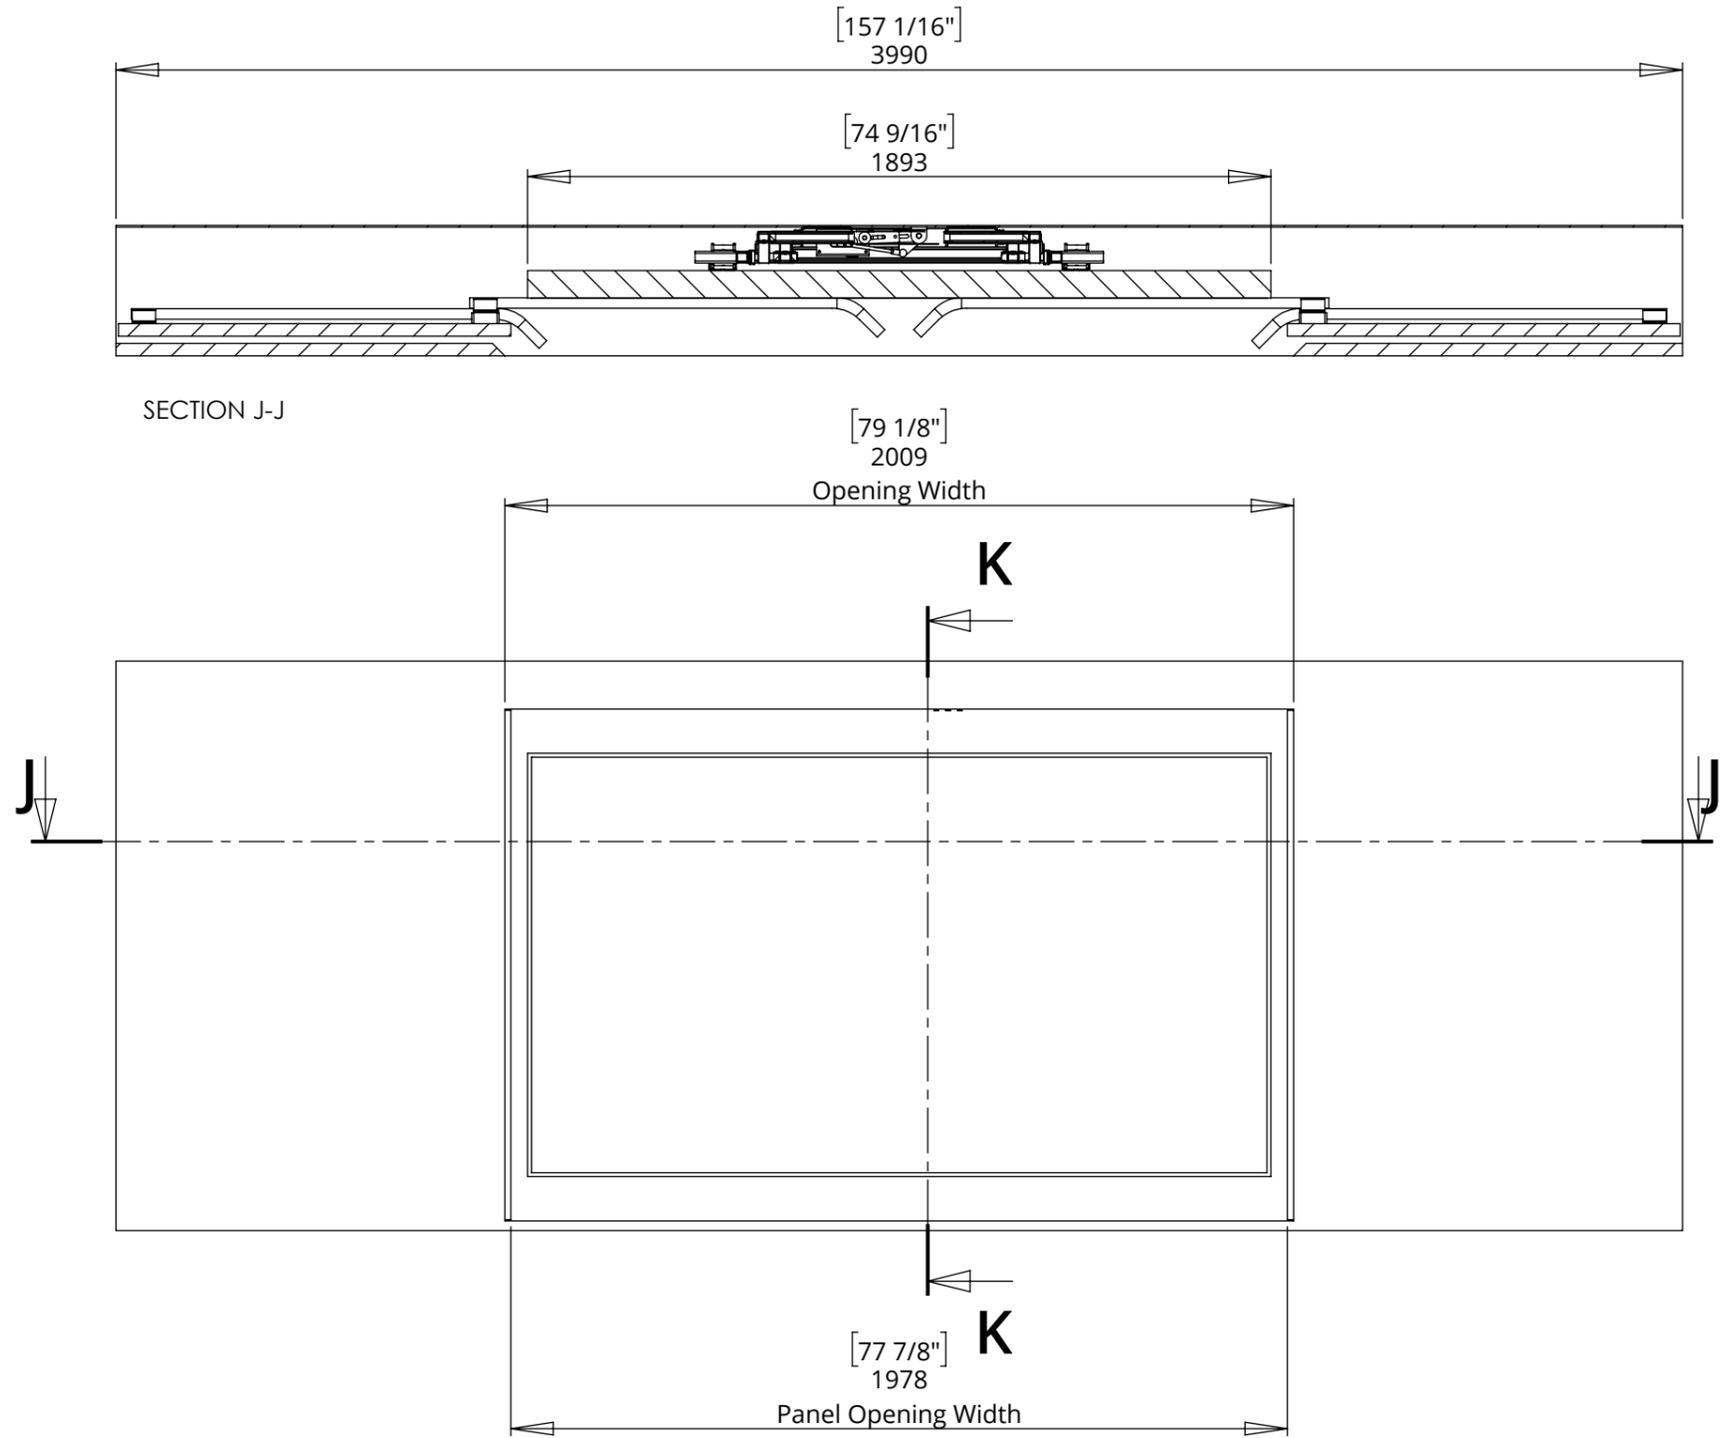

# MDM-RS-8



## MOVING DOOR MECHANISM RETRACT & SPLIT



future automation



### OPEN SCREEN ADVANCE DIMENSIONS

Shown with representative 85" Screen.

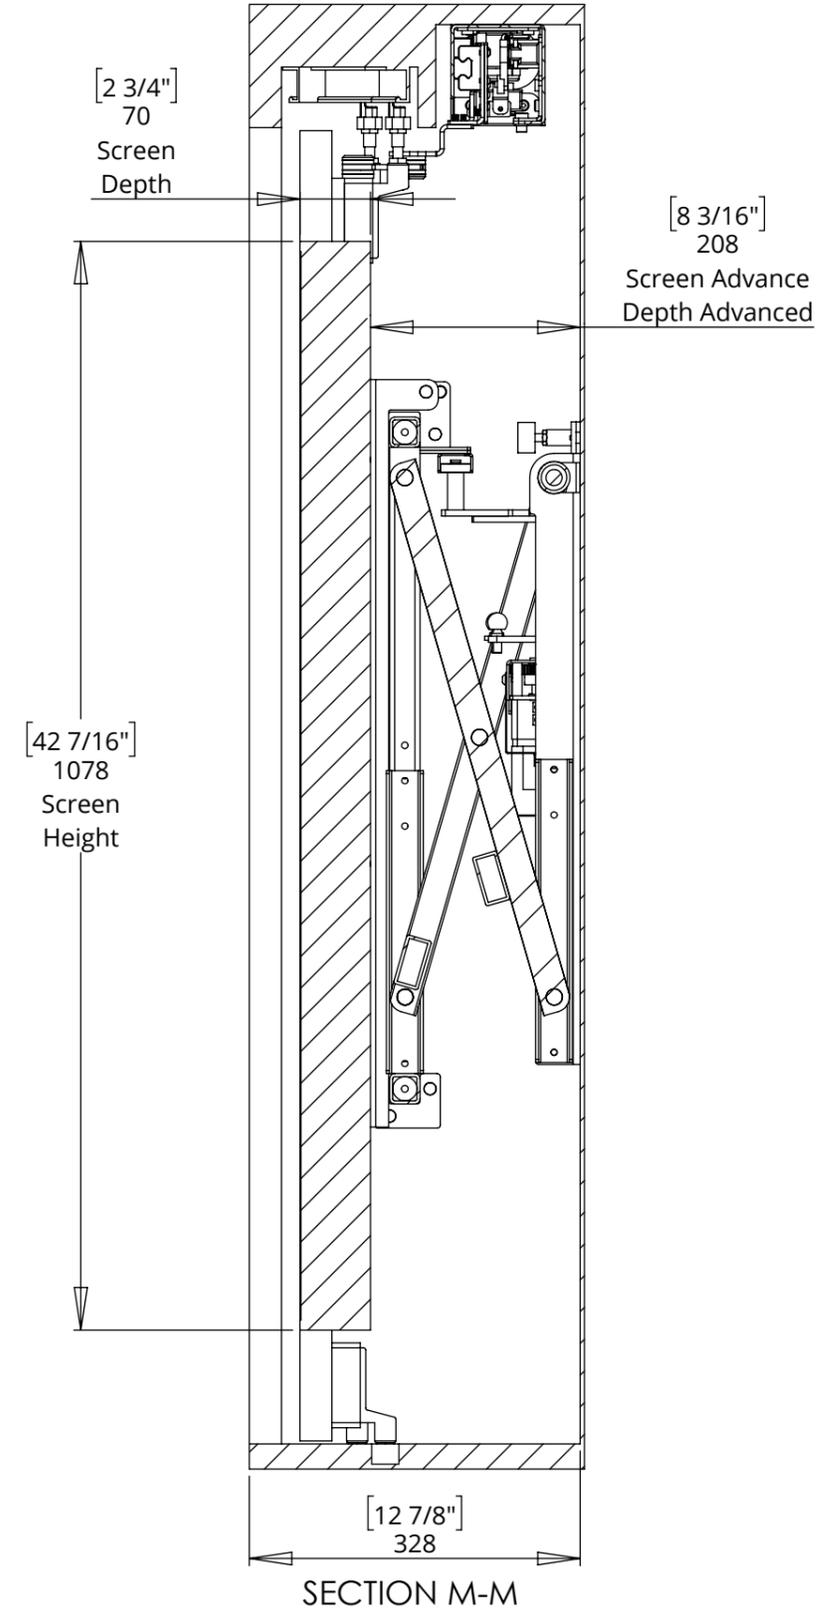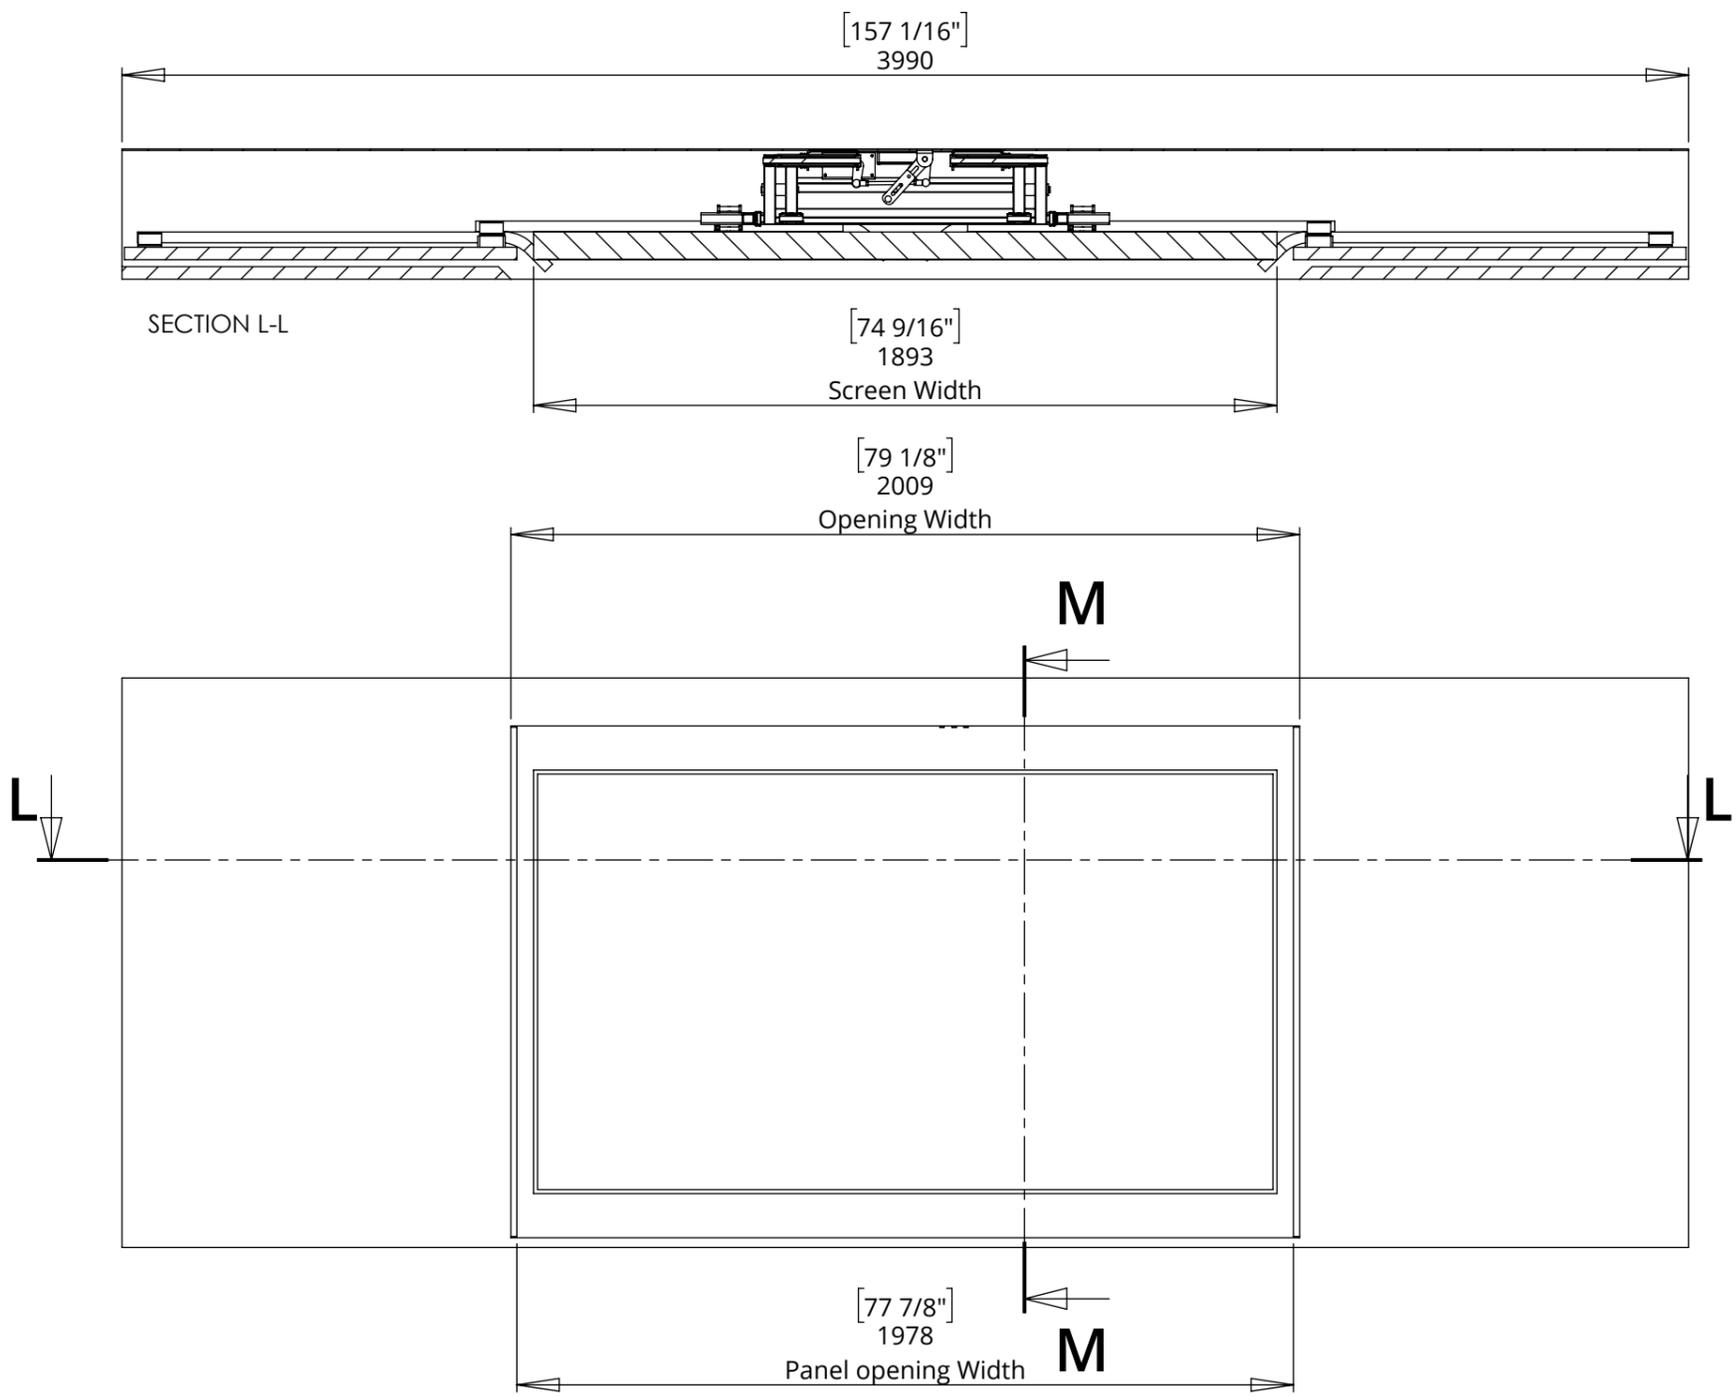

# MDM-RS-8

## MOVING DOOR MECHANISM RETRACT & SPLIT

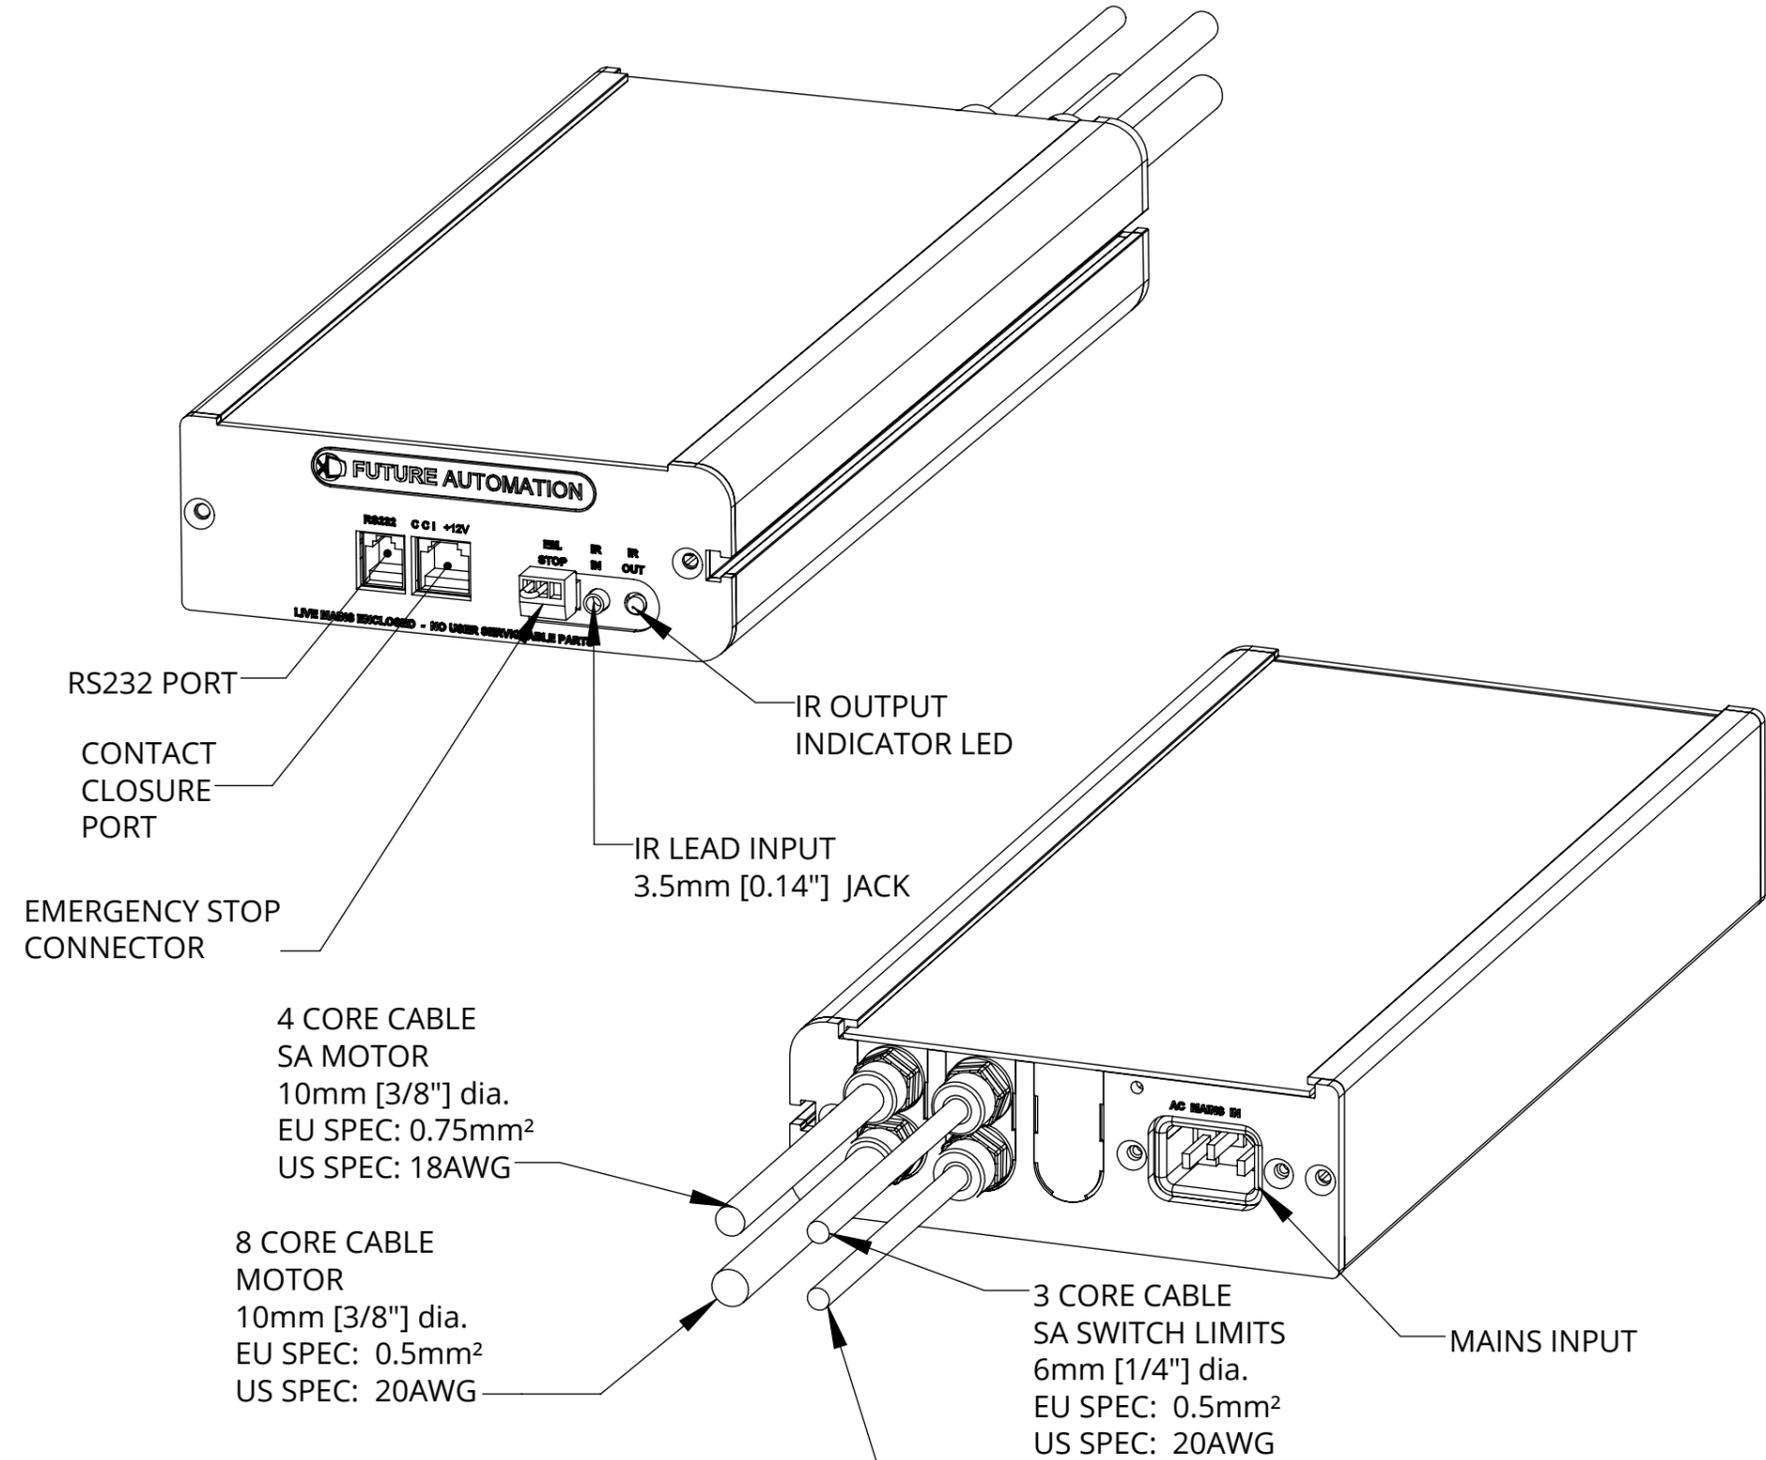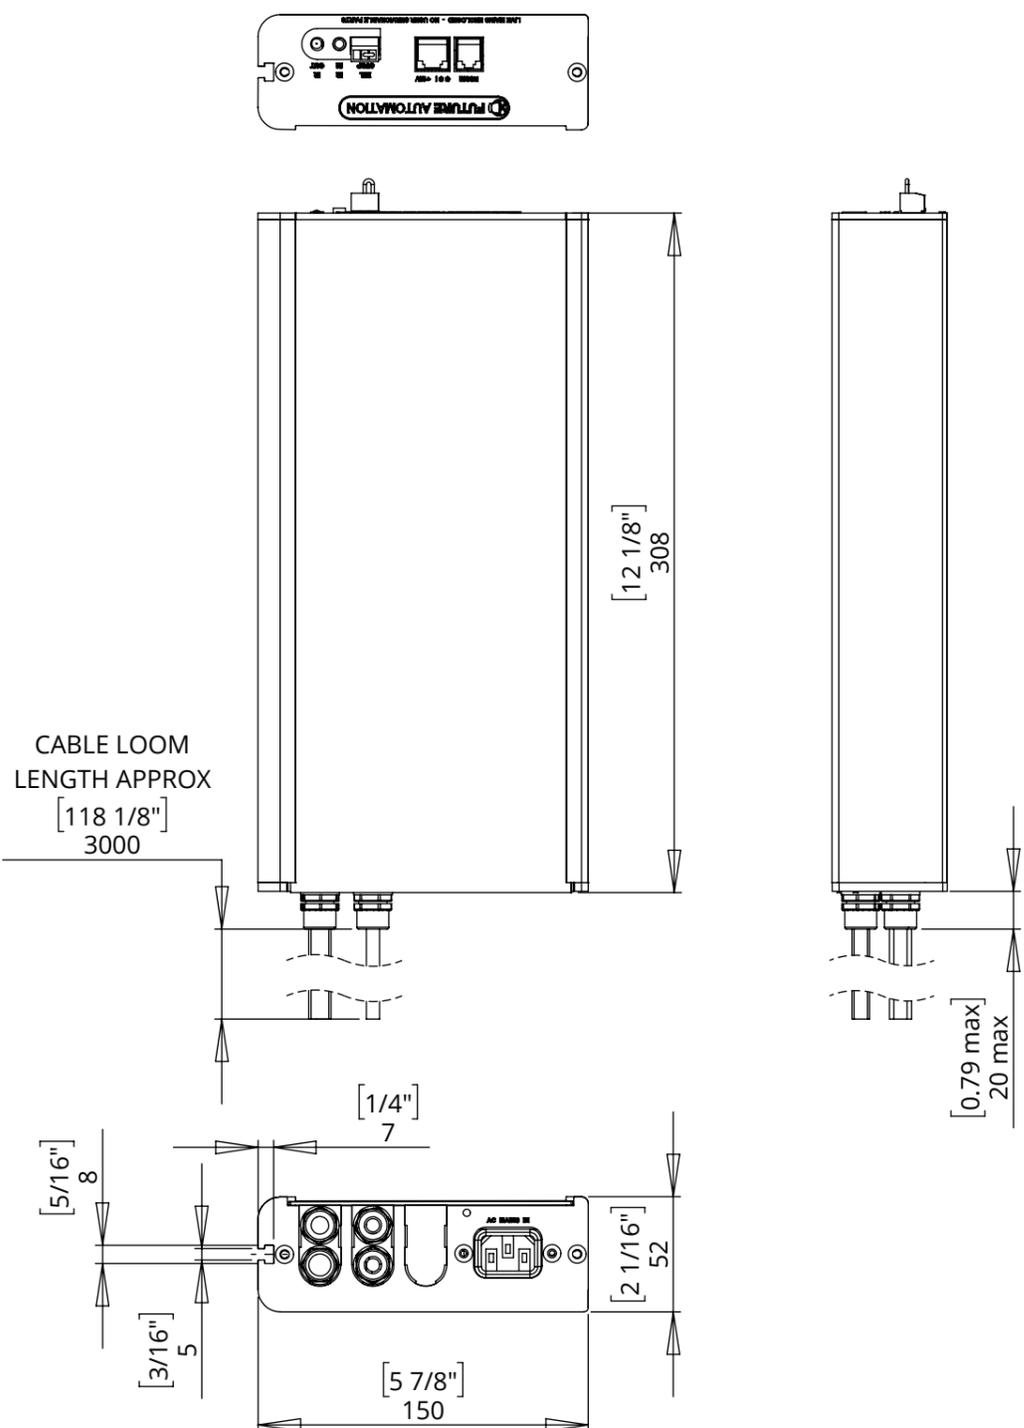

**NOTES**

- POWER SUPPLY UNIT (PSU) WILL ALLOW 110V OR 240V AC INPUT. THE SAME PSU IS USED FOR EU OR US MAINS SUPPLIES.
- OTHER THAN CONTROL CABLES, ALL CABLES TERMINATE AT CONTROL BOARD VIA STANDARD PHOENIX CONNECTORS.
- CABLE LOOM LENGTH SUPPLIED AT APPROX. 3m [118"]. LOOM CAN BE EXTENDED UP TO MAXIMUM OF APPROX. 10m [400"].
- MINIMUM CABLE BEND RADIUS 25mm [1"].