


RA-7

ROLLING ART - 75-77" SCREENS



future automation

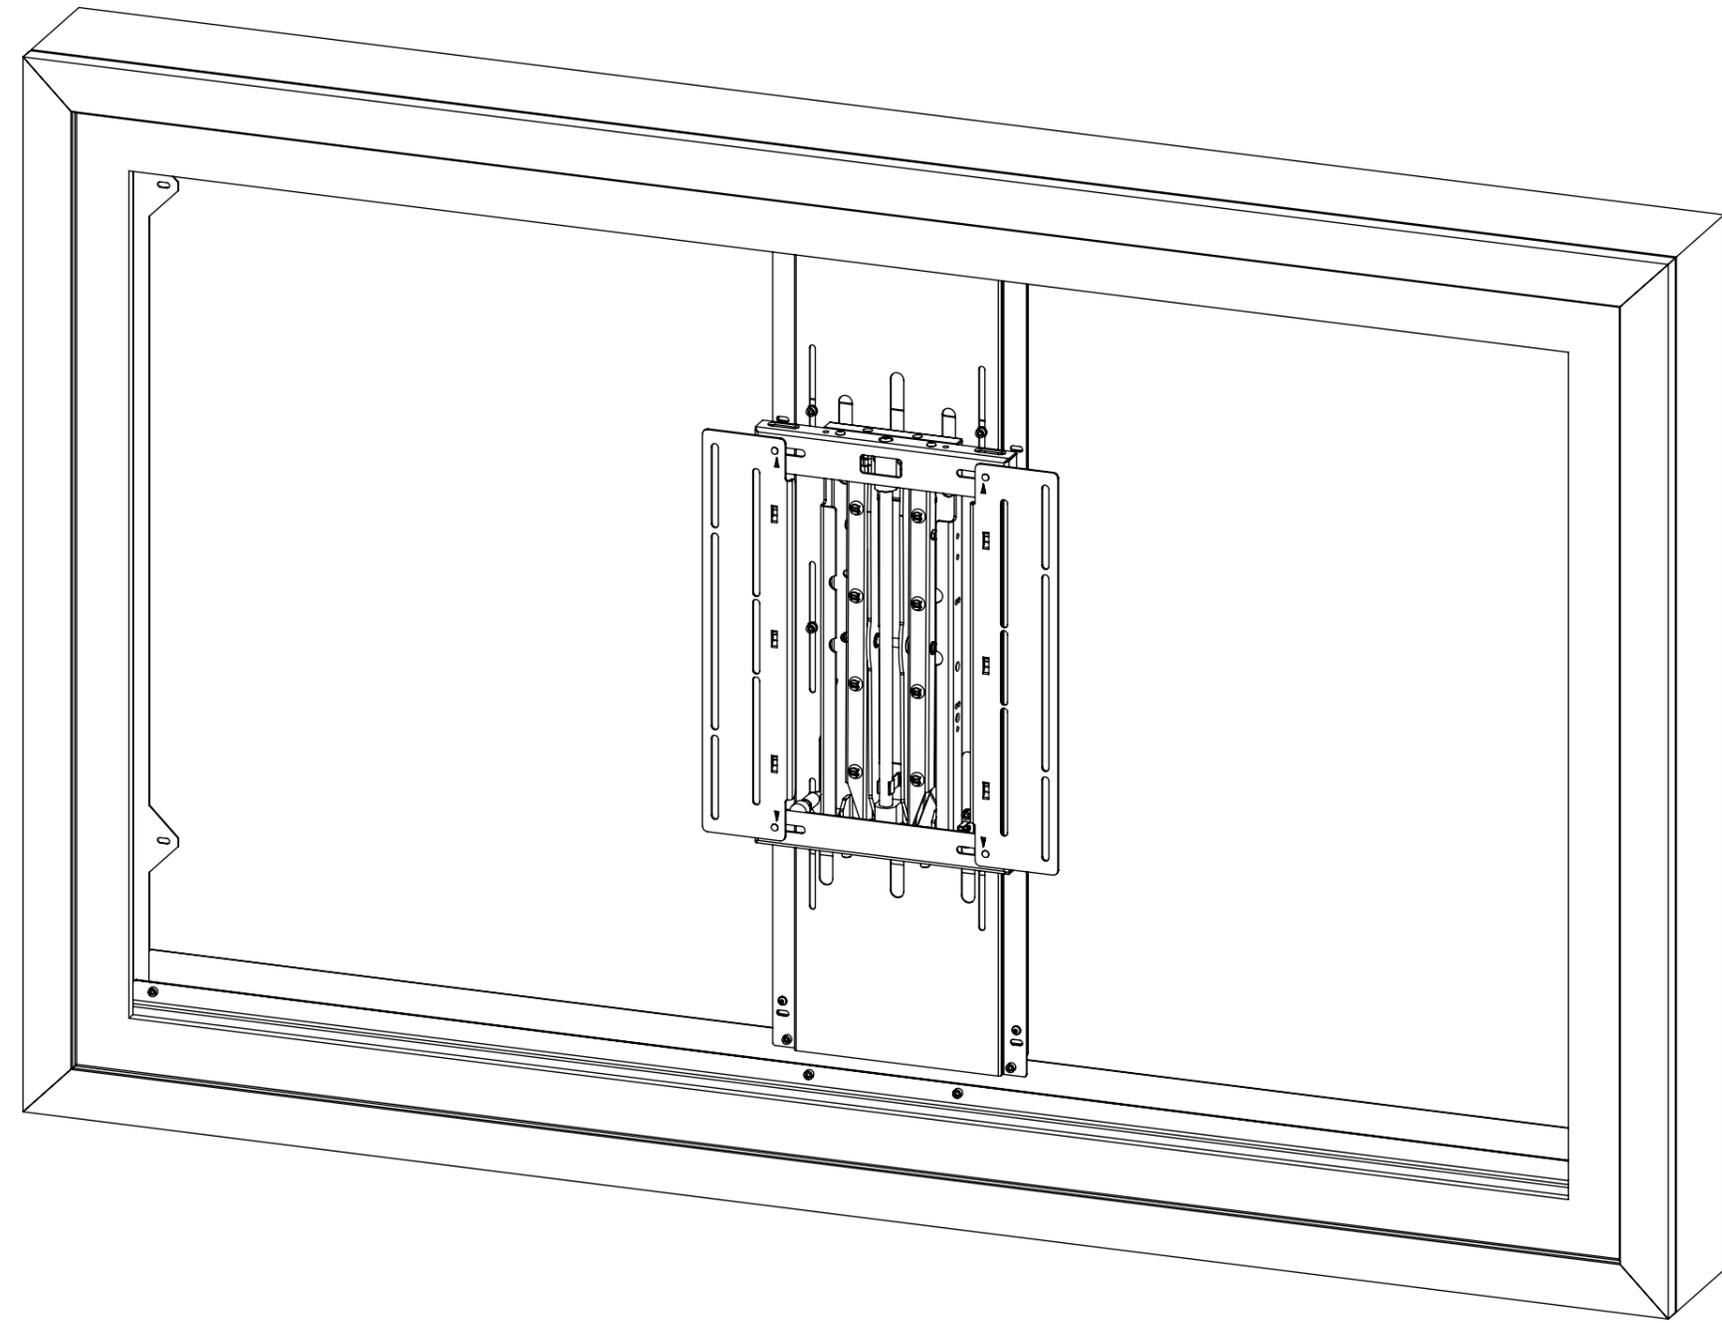

RA-7

ROLLING ART - 75-77" SCREENS



SPECIFICATION	MEASUREMENTS
Product Height	1266mm (49 13/16")
Product Width	1991mm (78 3/8")
Product Depth	155mm (6 1/8")
Product Weight	85kg (187lbs)
Maximum Screen Height	1000mm (39 3/8")
Maximum Screen Width	1730mm (68 1/8")
Maximum Screen Depth	50mm (2")
Maximum Screen Weight	60kg (132lbs)
Packaging Height	400mm (15 3/4")
Packaging Width	2100mm (82 11/16")
Packaging Depth	1370mm (53 15/16")
Shipping Weight	120kg (264lbs)
Power Supply Required	110V - 240V AC
Power Consumption Max.	120W
Power Consumption Standby	3W
Mounting Patterns Supported	VESA 400, 300, 200, 100 W x 400, 300, 200, 100 H
Control Options	IR Remote, RS232, Contact Closure
Product Options / Features	Custom RAL paint finishes, Custom sizing, sound bar mounting, VESA adaptor
Package Contents	Mechanism, Control Box, IR remote control, PS40 bracket, bolt pack
Marine Suitable	No


RA-7

ROLLING ART - 75-77" SCREENS

PRODUCT OVERVIEW

Motorised mechanism installed on wall/in wall to raise and lower printed art work to reveal and conceal screen.



Product is also supplied with PS40 manual service bracket for screen mounting.

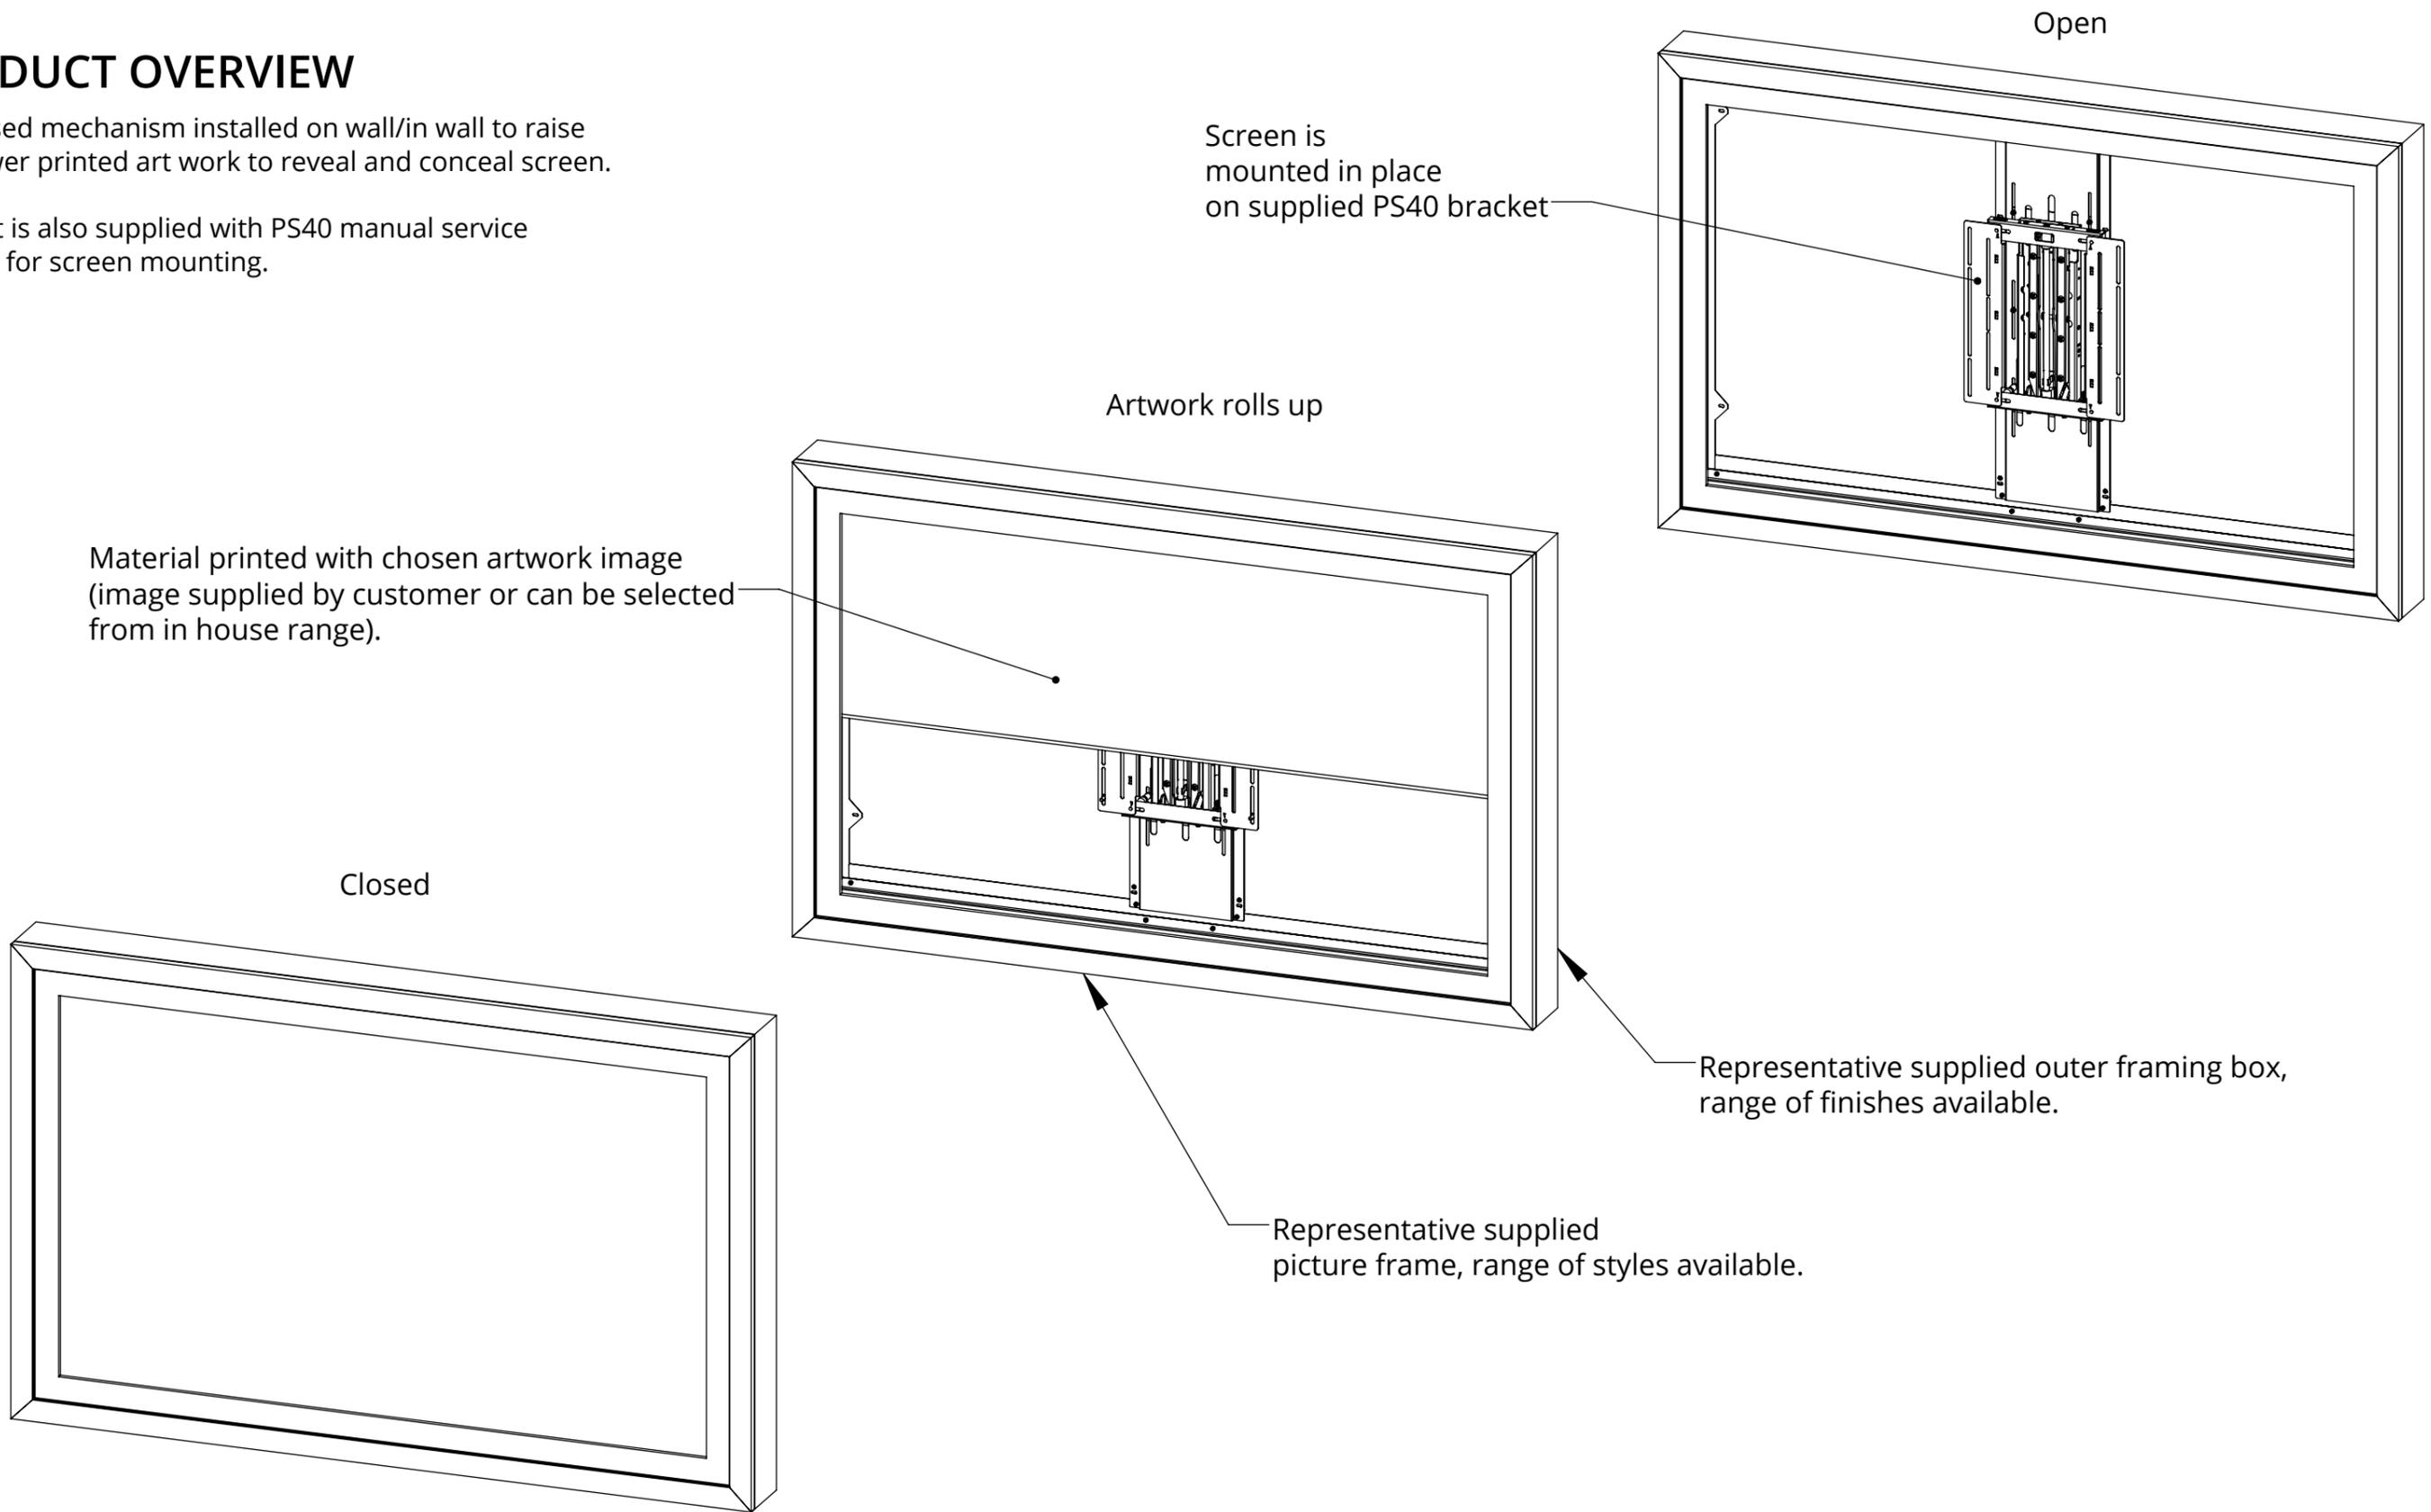

RA-7 ROLLING ART - 75-77" SCREENS

PRODUCT OVERVIEW CONTINUED

Product can be installed on wall or in wall as per examples below

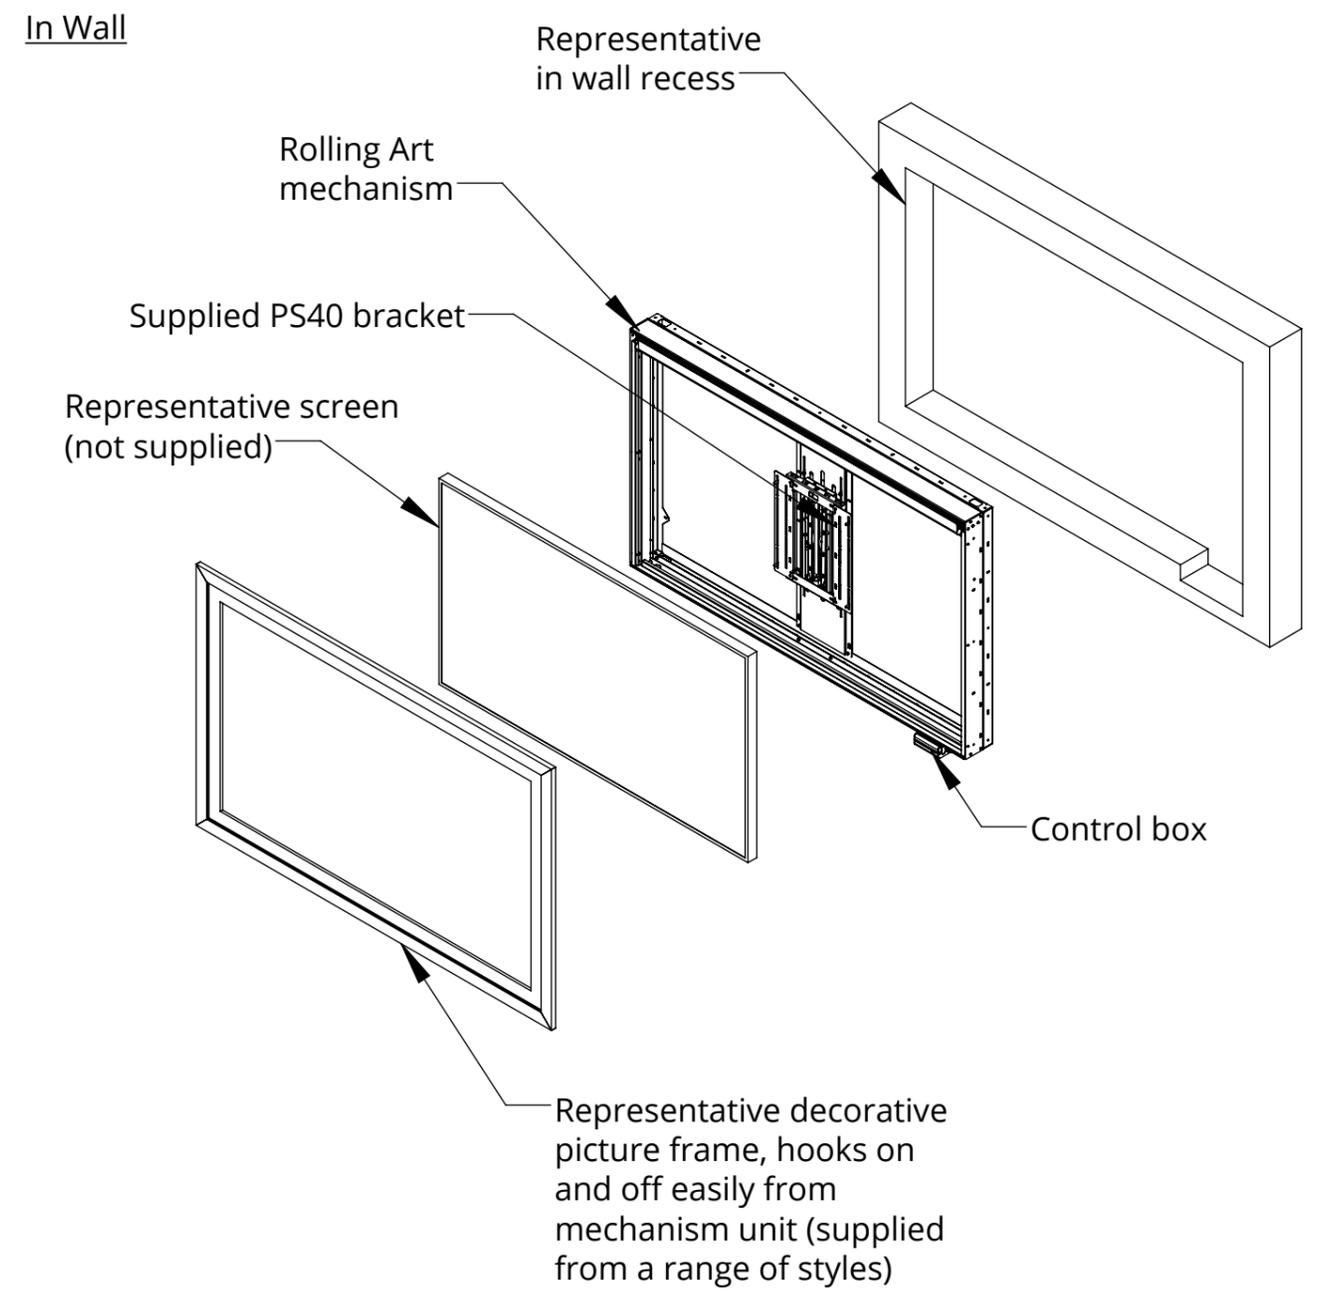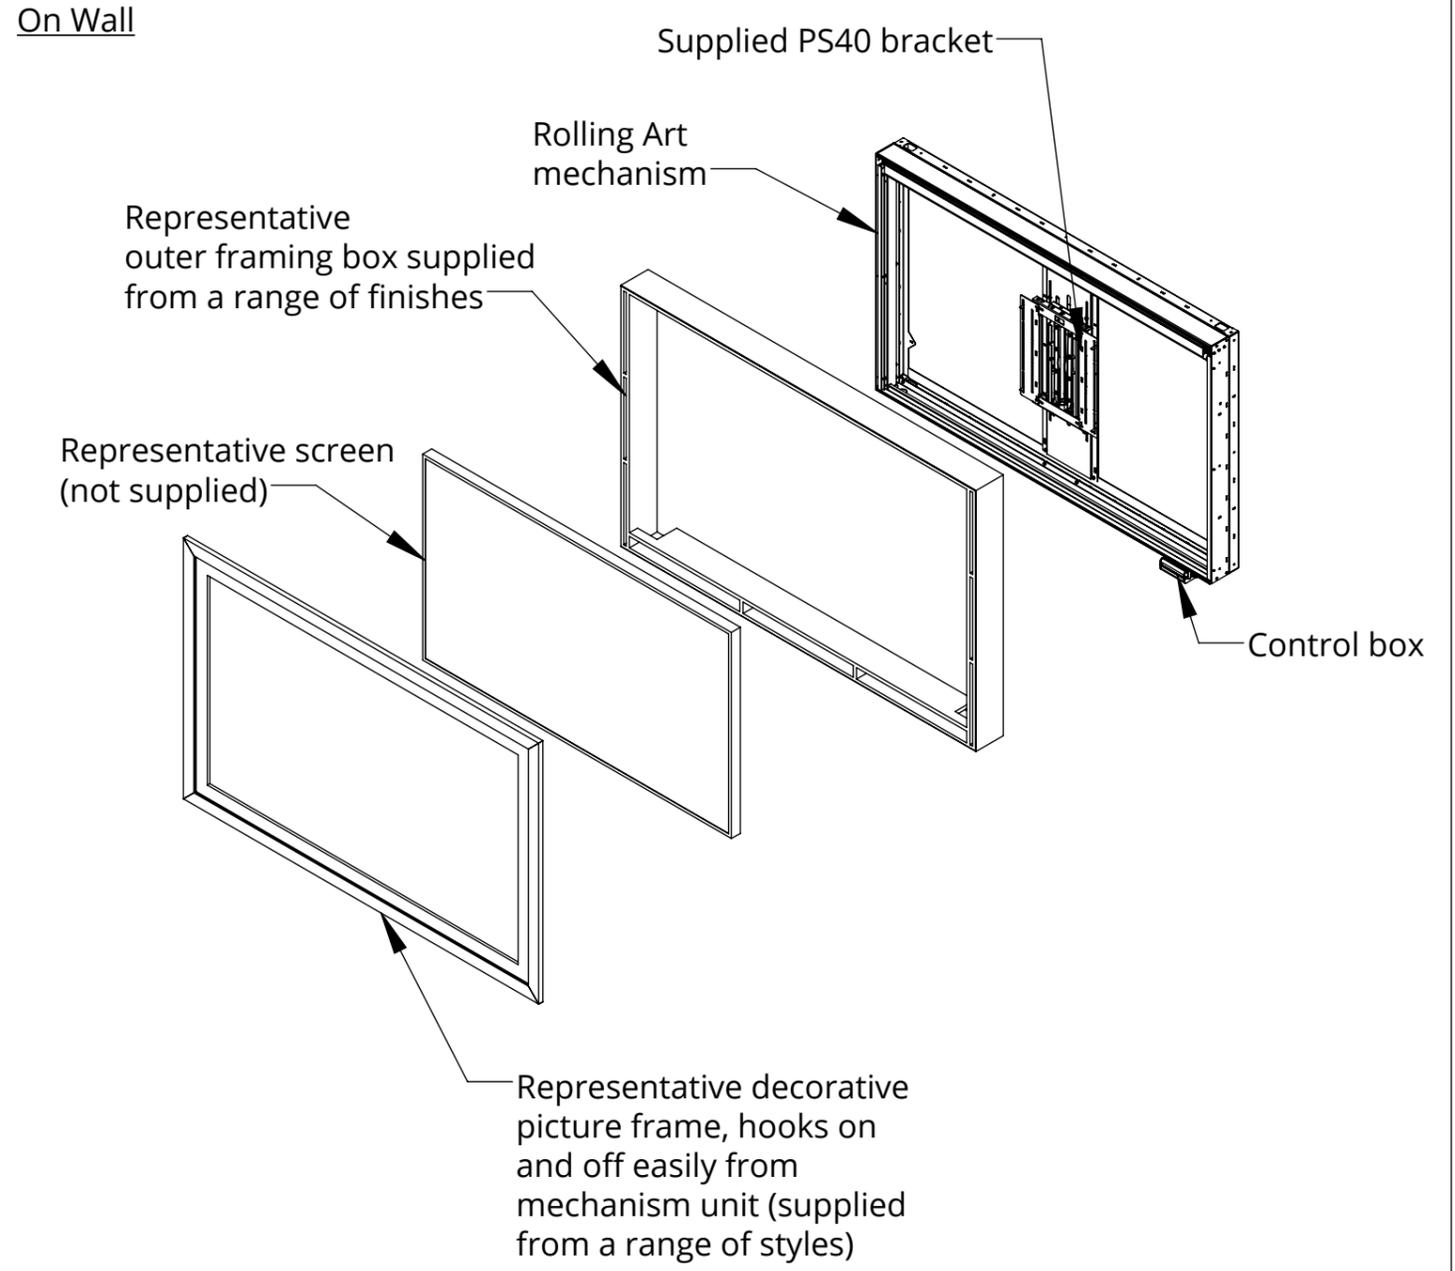


RA-7

ROLLING ART - 75-77" SCREENS




future automation

DIMENSIONS - ON WALL

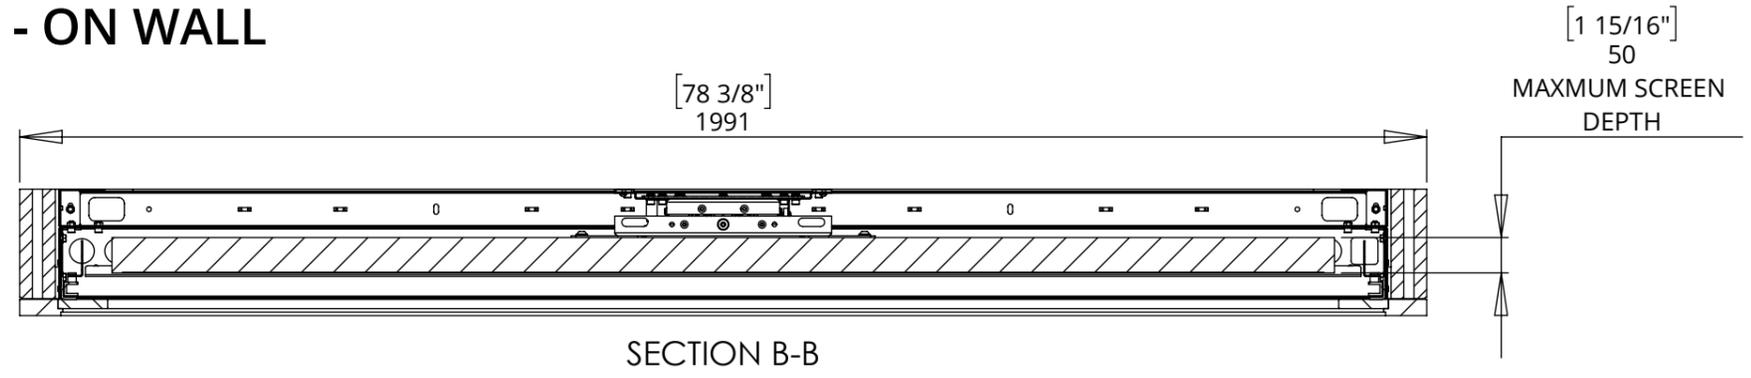

[1 15/16"]
50
MAXIMUM SCREEN
DEPTH

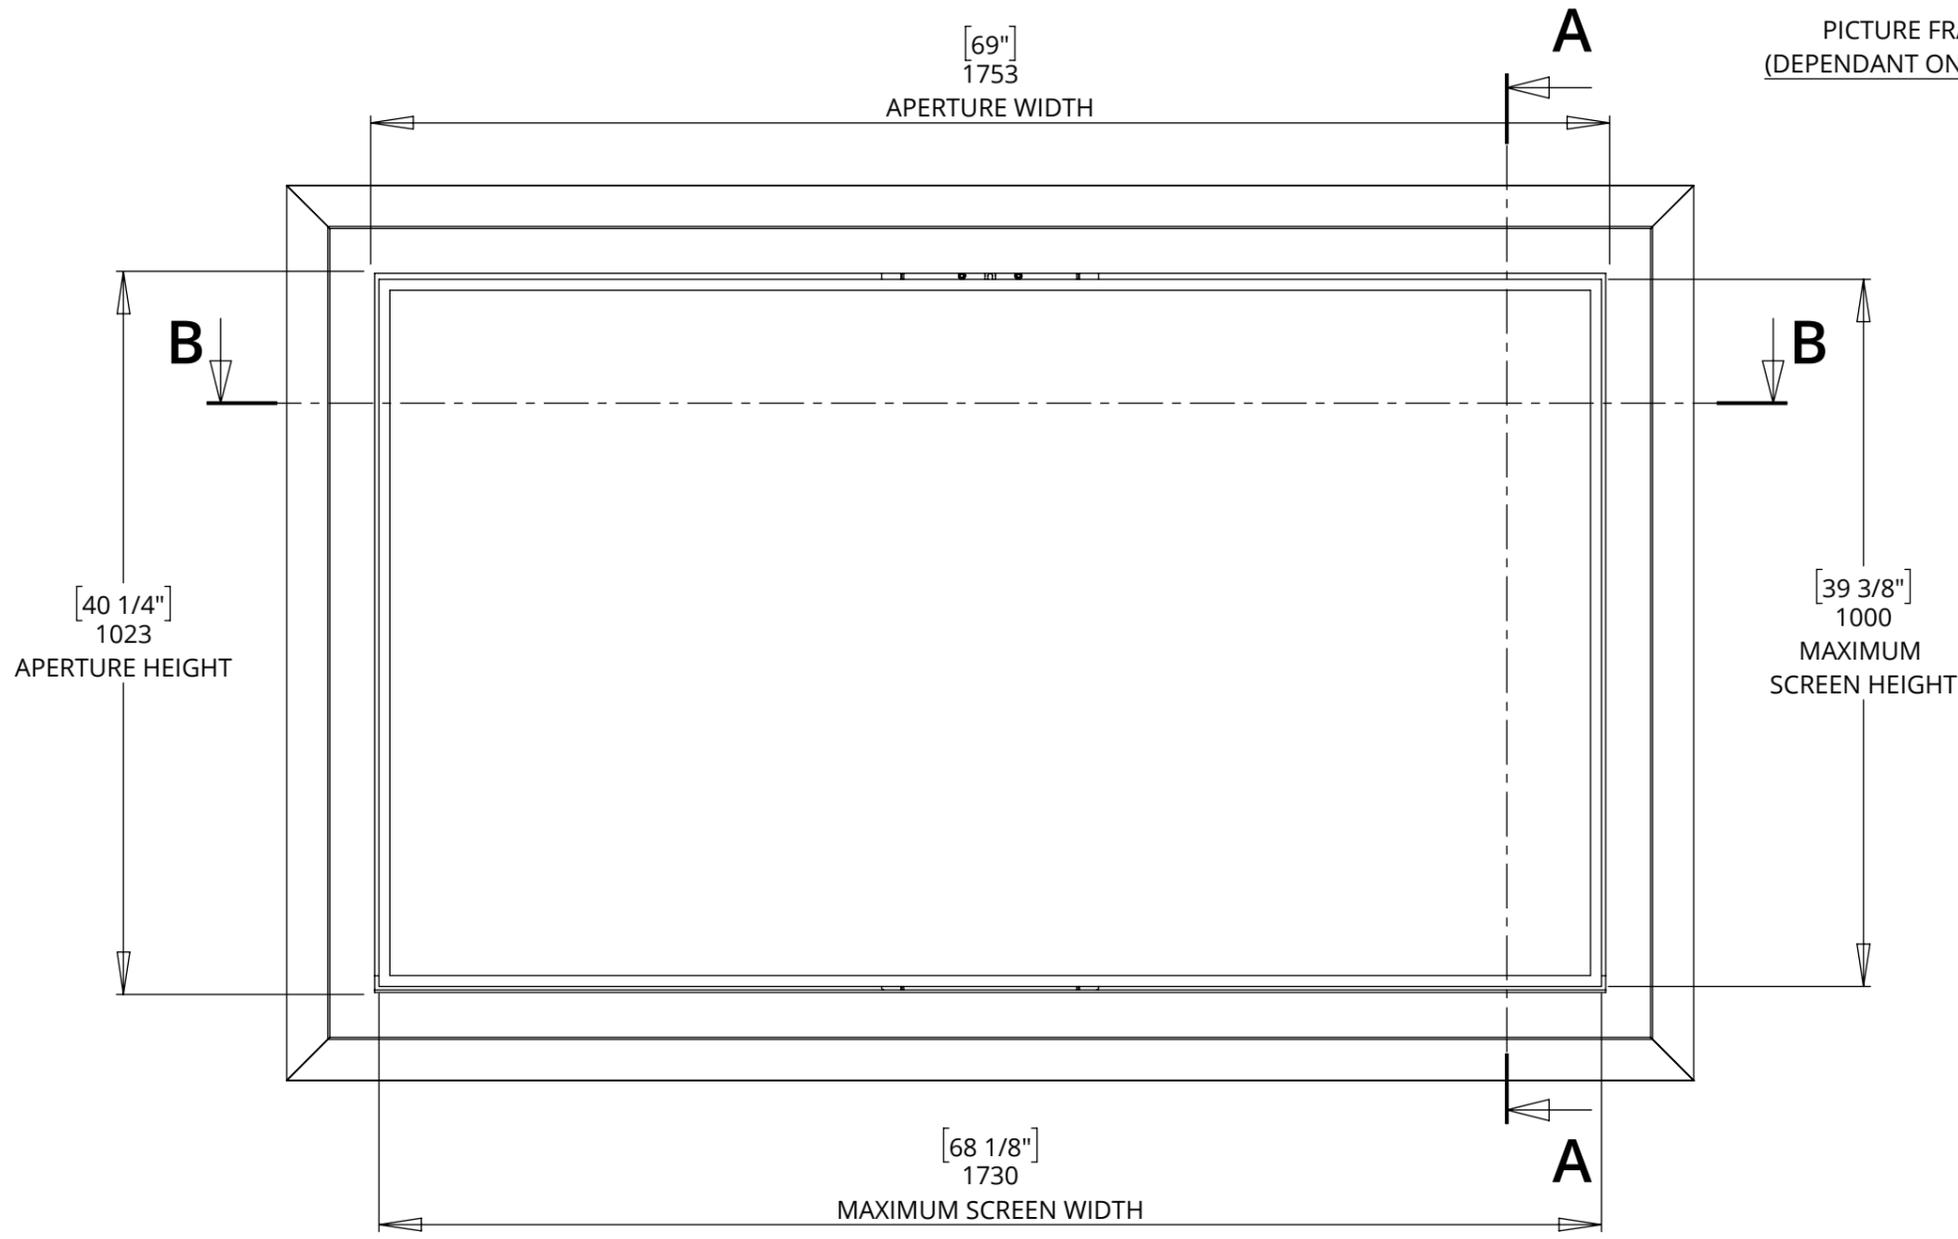

PICTURE FRAME DEPTH
(DEPENDANT ON STYLE CHOSEN)

[6 1/8"]
155

[39 3/8"]
1000
MAXIMUM
SCREEN HEIGHT

STRUCTURAL
SURFACE REQUIRED
TO FIX MECHANISM

[49 13/16"]
1266

SECTION A-A


RA-7

ROLLING ART - 75-77" SCREENS






future automation

DIMENSIONS - IN WALL

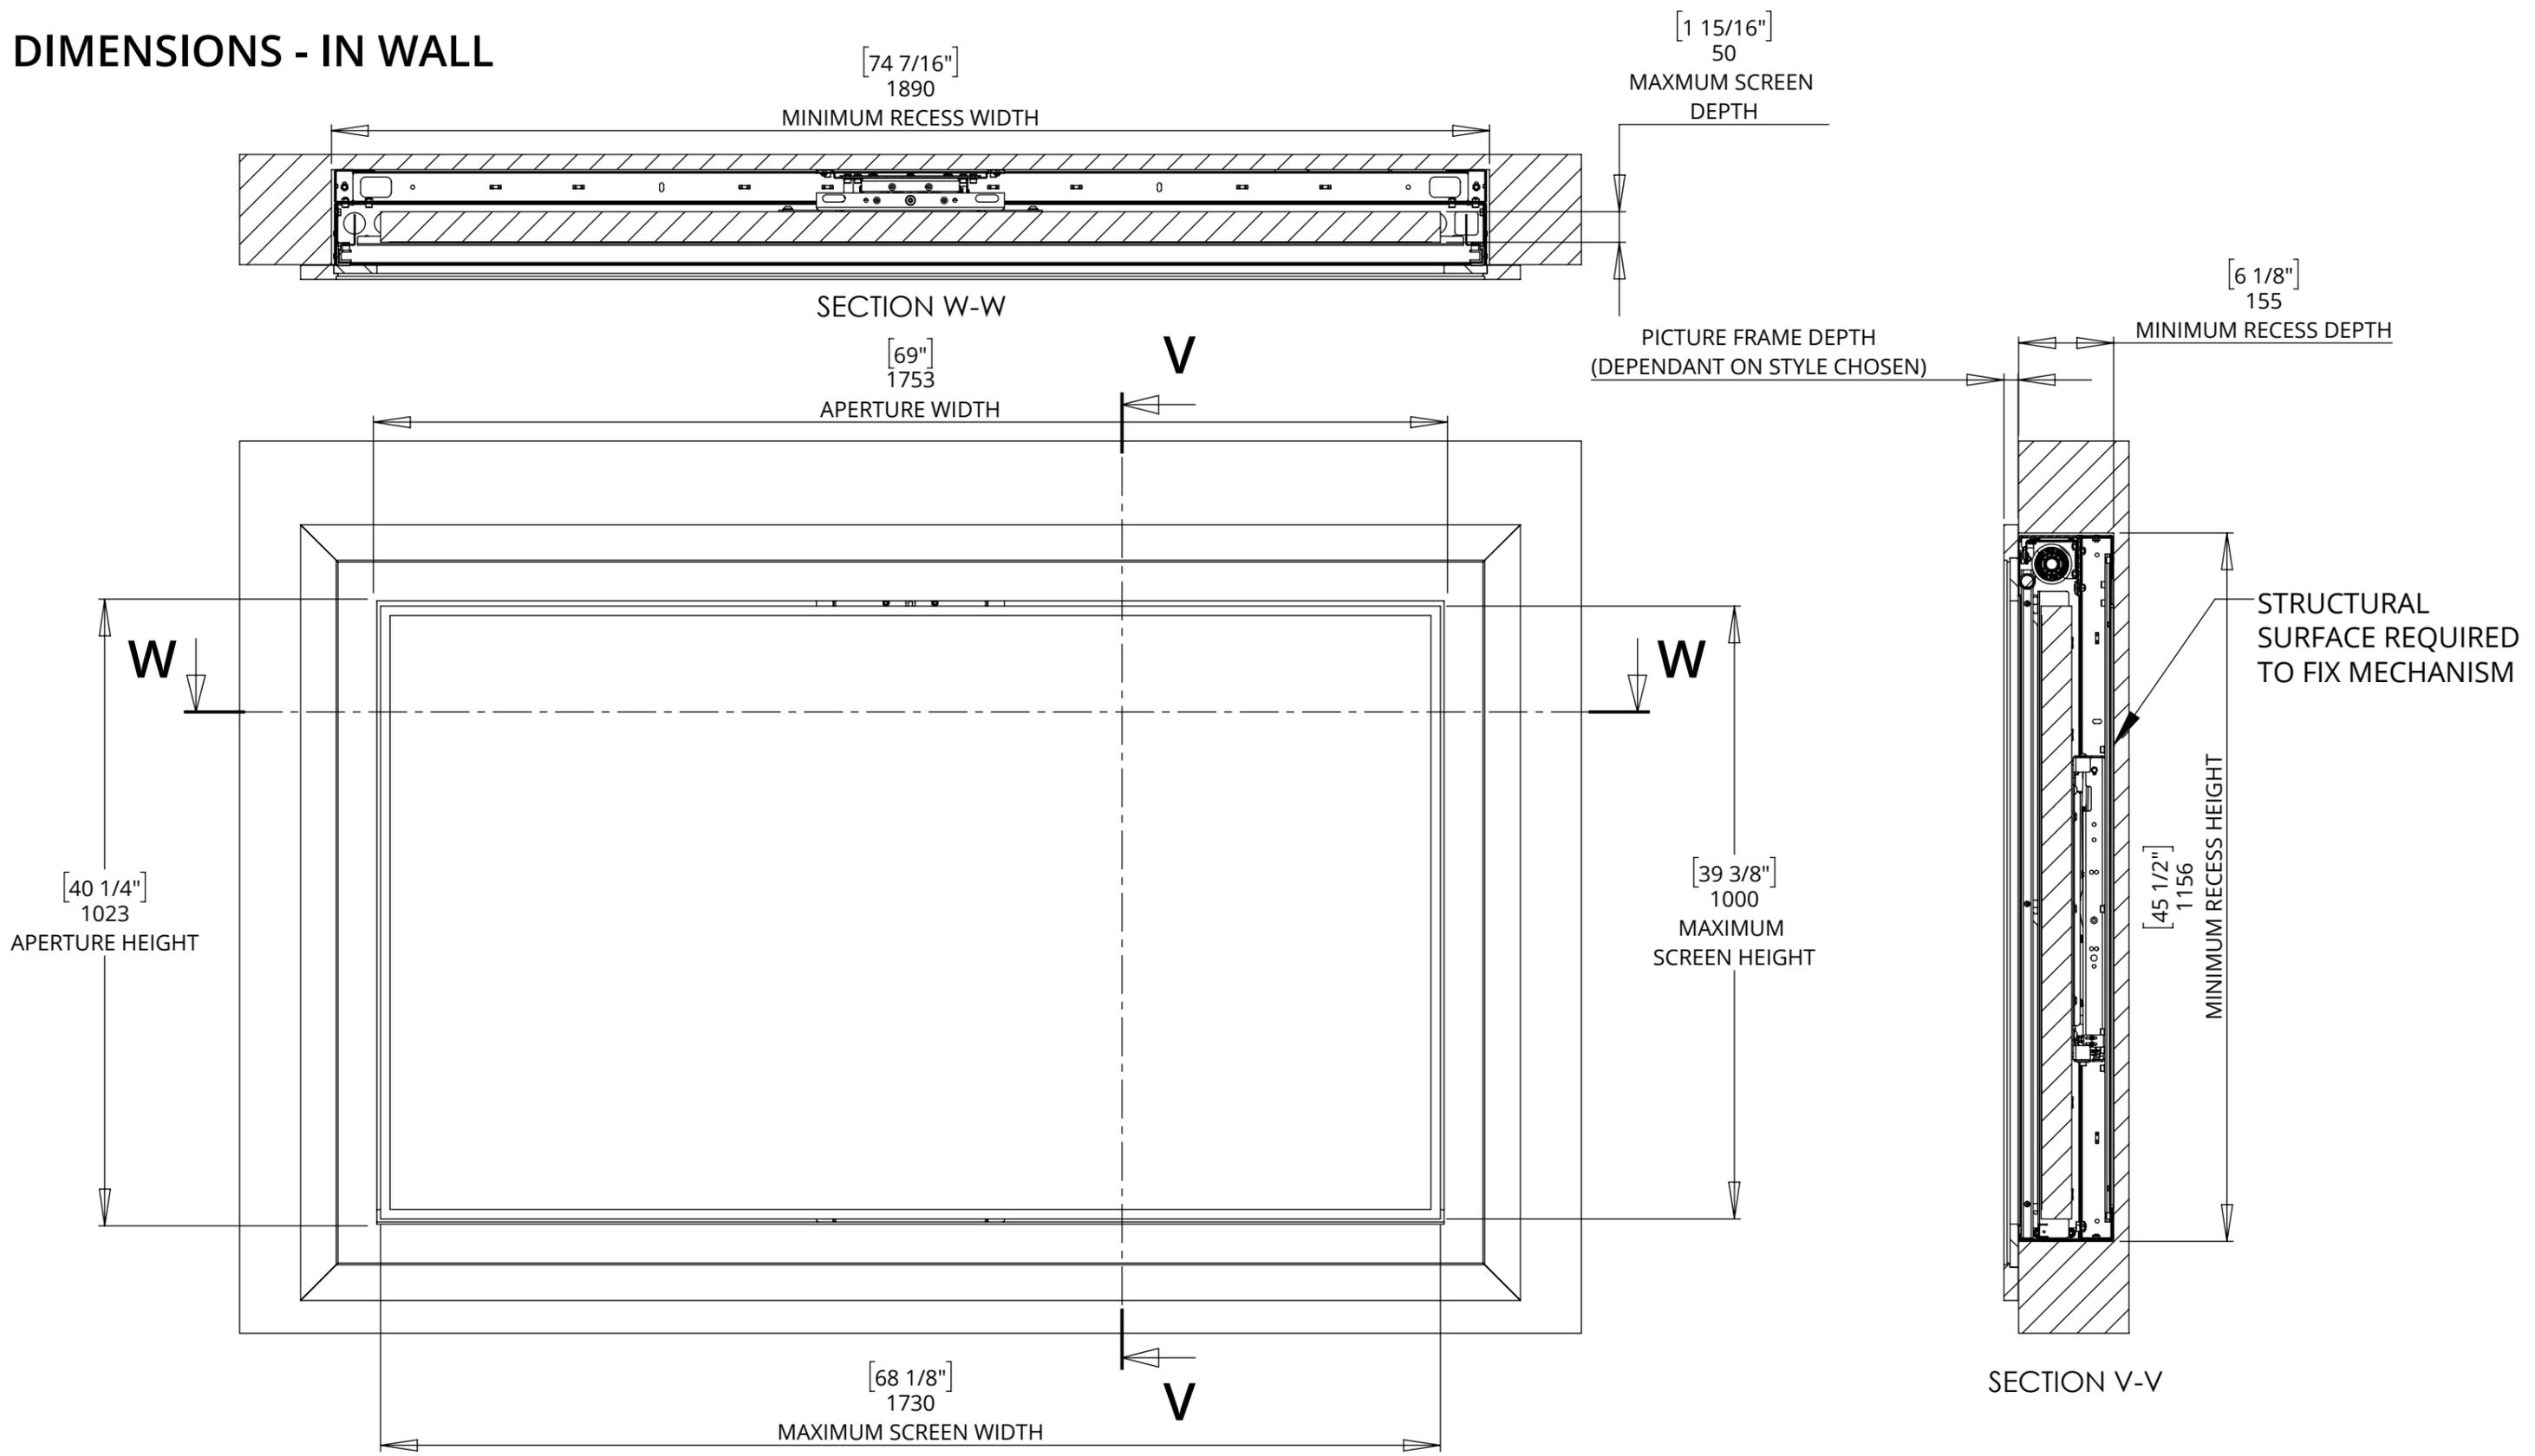


RA-7 ROLLING ART - 75-77" SCREENS

CONTROL BOX

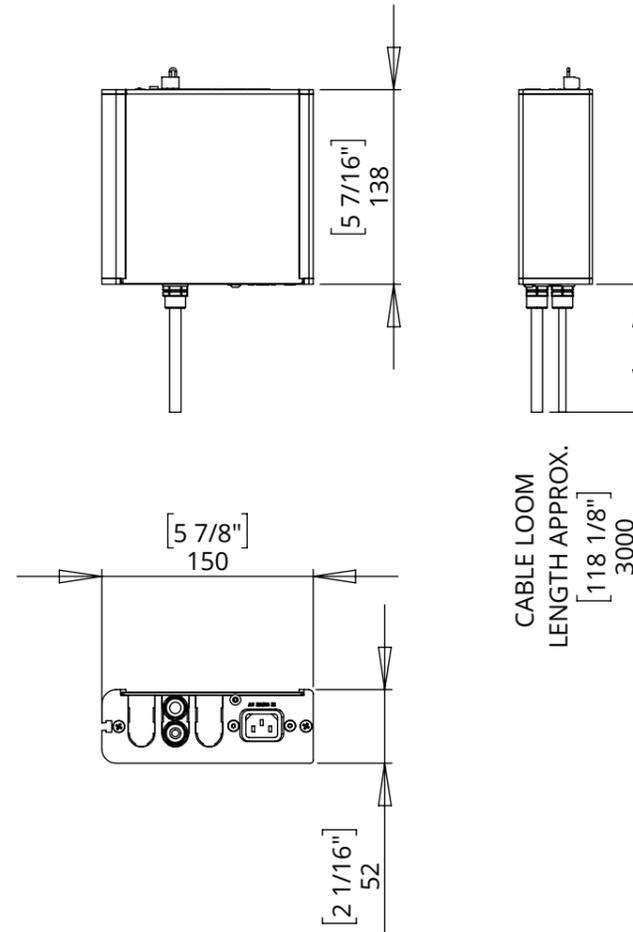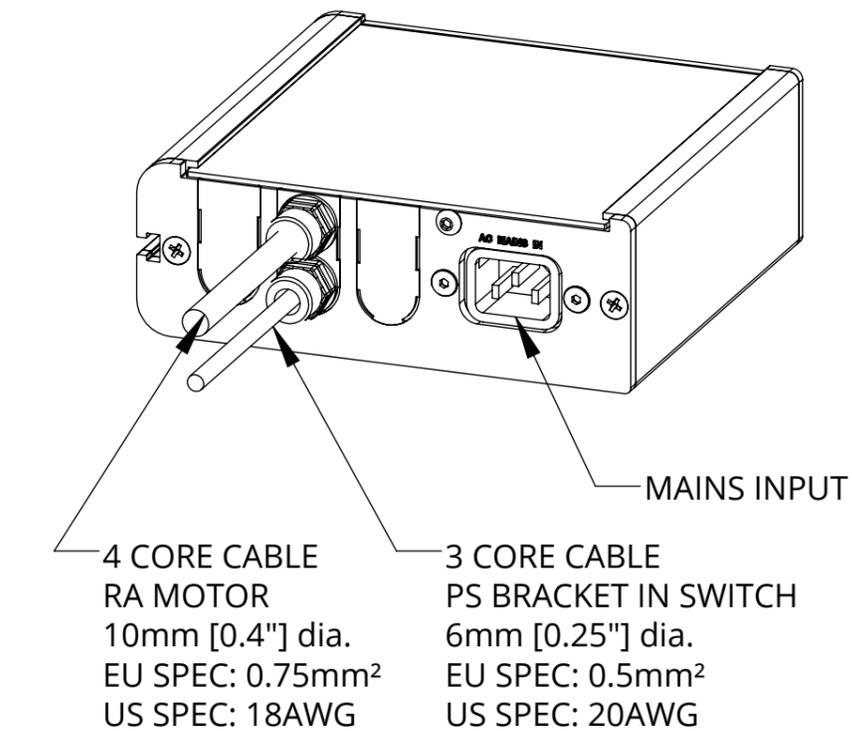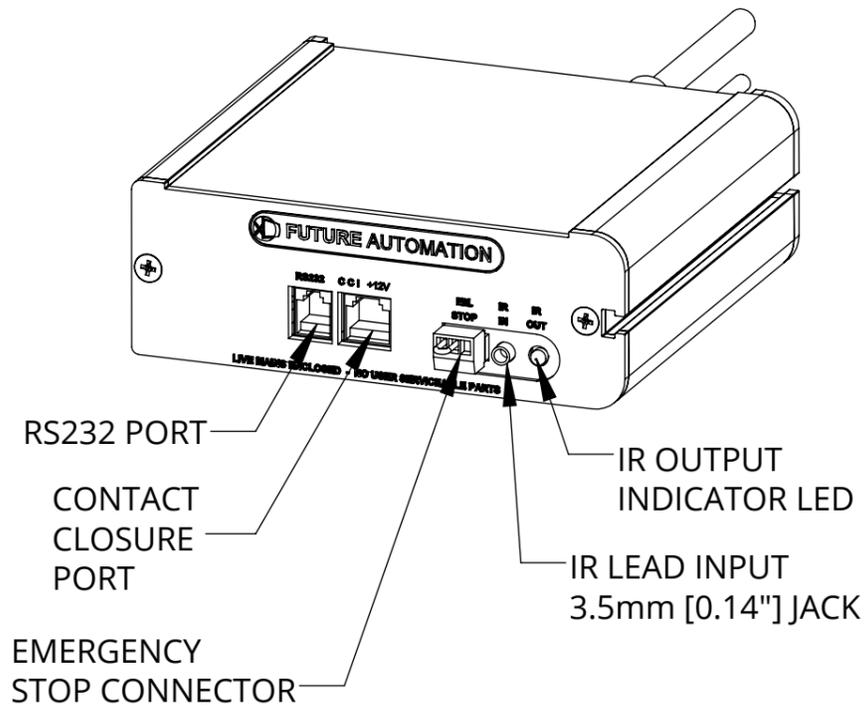

POWER / SIGNAL OUTLETS
IDEALLY LOCATED IN THIS AREA

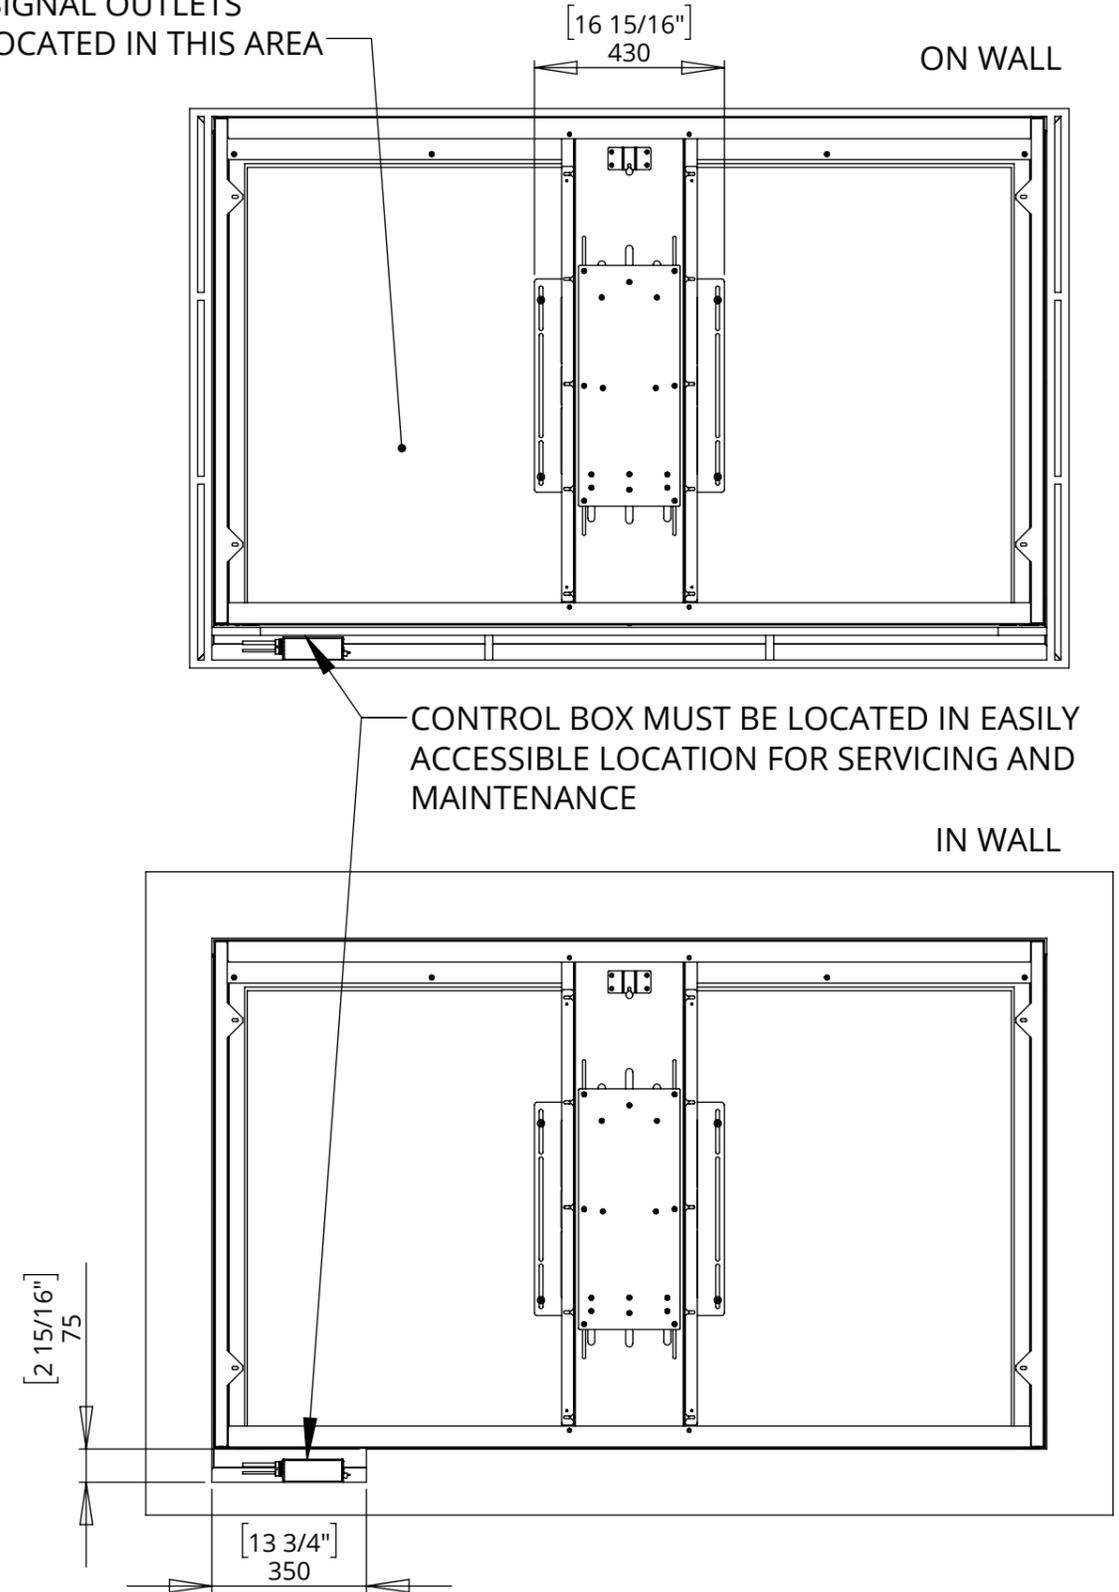

NOTES

- POWER SUPPLY UNIT (PSU) WILL ALLOW 110V OR 240V AC INPUT. THE SAME PSU IS USED FOR EU OR US MAINS SUPPLIES.
- OTHER THAN CONTROL CABLES, ALL CABLES TERMINATE AT CONTROL BOARD VIA STANDARD PHOENIX CONNECTORS.
- CABLE LOOM LENGTH SUPPLIED AT APPROX. 3m [118"]. LOOM CAN BE EXTENDED UP TO MAXIMUM OF APPROX. 10m [400"].
- MINIMUM CABLE BEND RADIUS 25mm [1"].

TECHNICAL SHEET

ISSUE 002
SHEET 7