

BS-ID SYSTEMS







TECH SPECS

BS SERIES


CEILING MOUNT



90° OPENING



UP TO 75"




FLUSH
INSTALLATION


ROTATION VERSION AVAILABLE



INSTALLATION OPTIONS




CEILING



TABLE

OPTIONALS




110° OPENING




OUTDOOR
VERSION



CUSTOM COLOUR FINISH
AVAILABLE ON REQUEST




FINISHING PANELS TO BE SUPPLIED
BY THE CUSTOMER



MODELS 7055 AND 7065 BS ID ARE
ALSO AVAILABLE IN THE 120 MM
DEPTH VERSION.

BS - ID

CEILING MOUNT

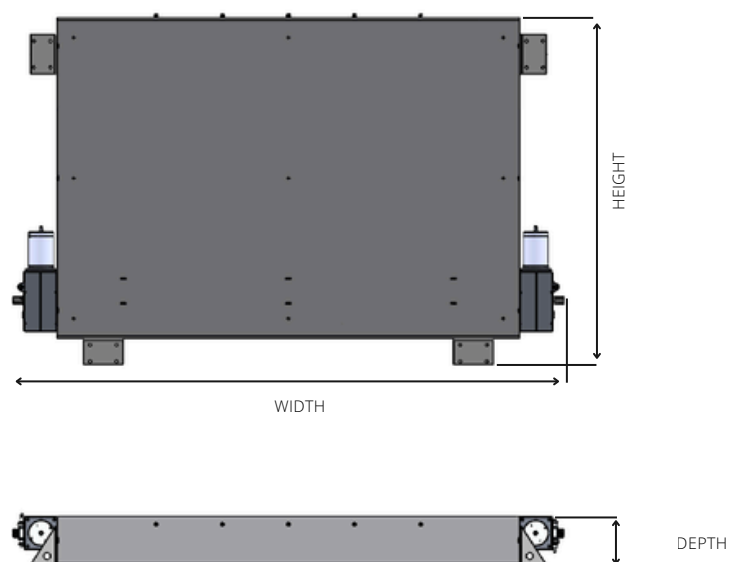

TECHNICAL SPECIFICATIONS

MODELLO	7042 BS ID	7055 BS ID	7065 BS ID	7075 BS ID
MECHANISM DIMENSIONS	W1250 H775	W1700 H969+80**	W2010 H1100+80**	W2290 H1250+80**
DEPTH	120	150	155	155
SCREEN SIZE	Max 42"	Max 55"	Max 65"	Max 75"
MAX LIFTING CAPACITY	35 Kg	50 Kg	65 Kg	75 Kg
MOVEMENT TYPE	Motorised	Motorised	Motorised	Motorised
VESA COMPATIBILITY	200/300	200/300/400	200/300/400	400/600
INSTALLATION TYPE	Ceiling - Table	Ceiling - Table	Ceiling - Table	Ceiling - Table
DECIBEL RATING	< 42 dB	< 42 dB	< 42 dB	< 42 dB
MATERIAL	Aluminium - Steel	Aluminium - Steel	Aluminium - Steel	Aluminium - Steel
COLOUR FINISH	Black paint - RAL 9005	Black paint - RAL 9005	Black paint - RAL 9005	Black paint - RAL 9005
ELECTRONICS				
CONTROL BOX DIMENSIONS	120 x 90 x 60 MM	120 x 90 x 60 MM	120 x 90 x 60 MM	120 x 90 x 60 MM
CONTROL OPTIONS	Clean contacts RF	Clean contacts RF	Clean contacts RF	Clean contacts RF
POWER CONSUMPTION	240 - 480W	240 - 480W	240 - 480W	240 - 480W
INPUT POWER SUPPLY	240V or 110V AC	240V or 110V AC	240V or 110V AC	240V or 110V AC
OUTPUT POWER SUPPLY	24 V DC	24 V DC	24 V DC	24 V DC
SHIPPING INFORMATION				
SHIPPING DIMENSIONS	1350x850x150 	1800x1100x200 	2100x1300x200 	2400x1450x200 
SHIPPING WEIGHT	85 kg	110 kg	150 kg	210 kg

** Models 7055 and above include fixing brackets