


LSM-S-BE 2

LIFT SYSTEM SWIVEL FOR BOX ENCLOSURE



future automation

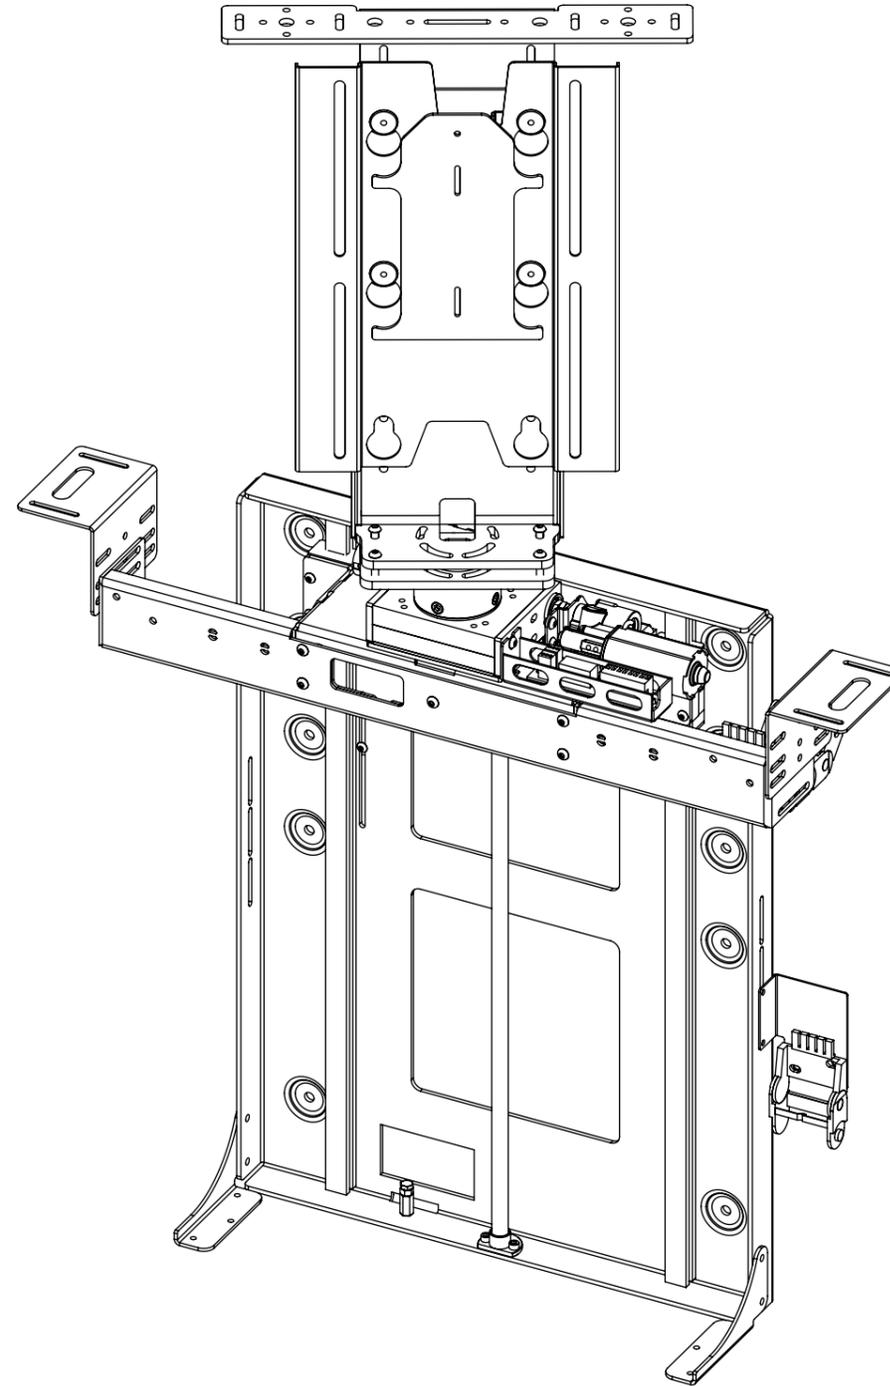

LSM-S-BE 2

LIFT SYSTEM SWIVEL FOR BOX ENCLOSURE



SPECIFICATION	MEASUREMENTS
Maximum Screen Height	484mm (19.0")
Maximum Rotation	180 ° in each direction
Maximum Lifting Capacity	50Kg (110lb)
Maximum Lifting Capacity (Marine)	30Kg (66lb)
Internal Cabinet Height	694mm (27.3")
Decibel Rating	52 dB
Packaging Dimensions	880 x 850 x 330mm (34.6 x 33.5 x 13")
Shipping Weight	34kg (75lbs)
Movement Type	Motorised
Power Supply Required	110V - 240V AC
Power Consumption	250 - 500W
Power Consumption Standby	3W
Mounting Patterns Supported	VESA 400, 300, 200 W x 400, 300, 200 H
Control Options	IR Remote, RS232, Contact Closure, RF Available
Product Options / Features	Specific B&O and Loewe mounts / adapters, Custom RAL paint finishes
Package Contents	Mechanism, IR remote control
Marine Suitable	Yes

LSM-S-BE 2



future automation


LIFT SYSTEM SWIVEL FOR BOX ENCLOSURE

CABLE ROUTING


The LSM has an easily removable Mount Cover that cables from the screen can be routed underneath. Cables then travel through the centre of the Mount Boss and into the beam. Cables must be routed carefully to prevent any interference with the LSM beam as it operates.

Screen and Mechanism cables should be routed to a control box outside of the cabinet via an opening in the back of the cabinet or a conduit leading to the bottom.


- SCREEN CABLES
- MECHANISM CABLES
- POWER CABLE

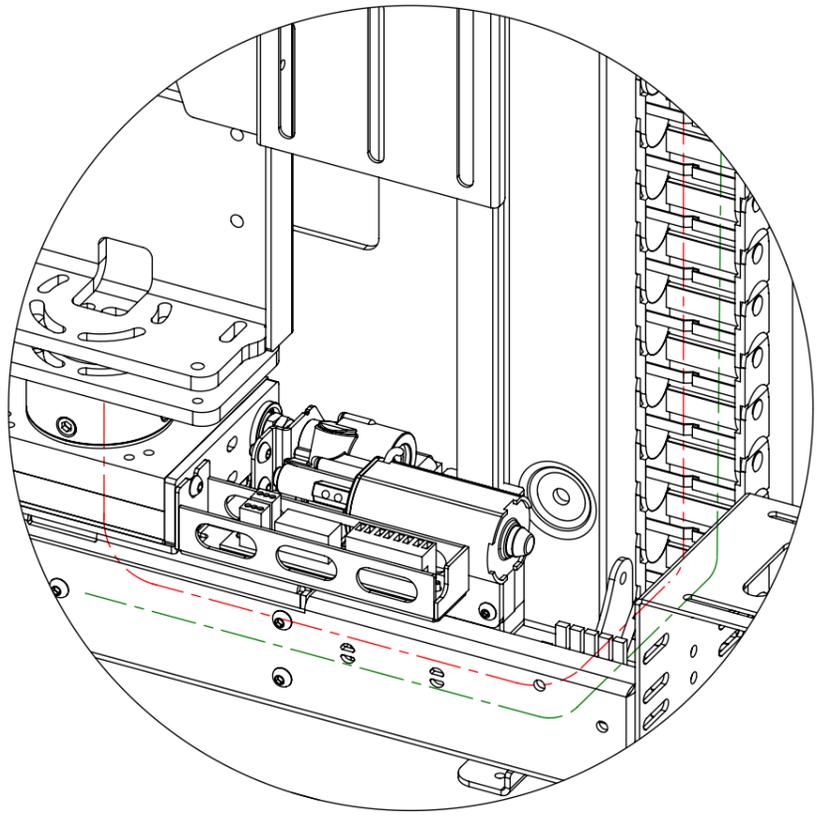


DETAIL A

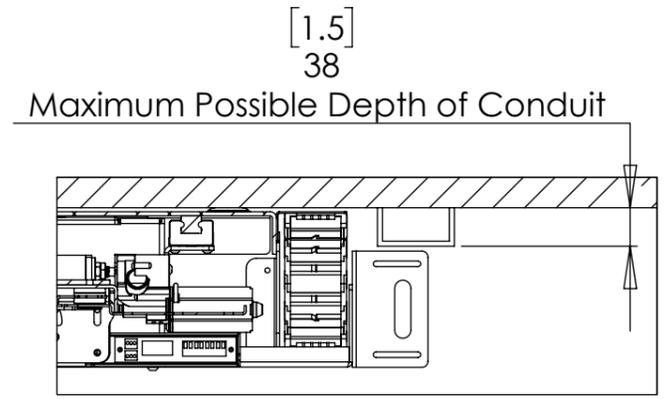

TOP VIEW

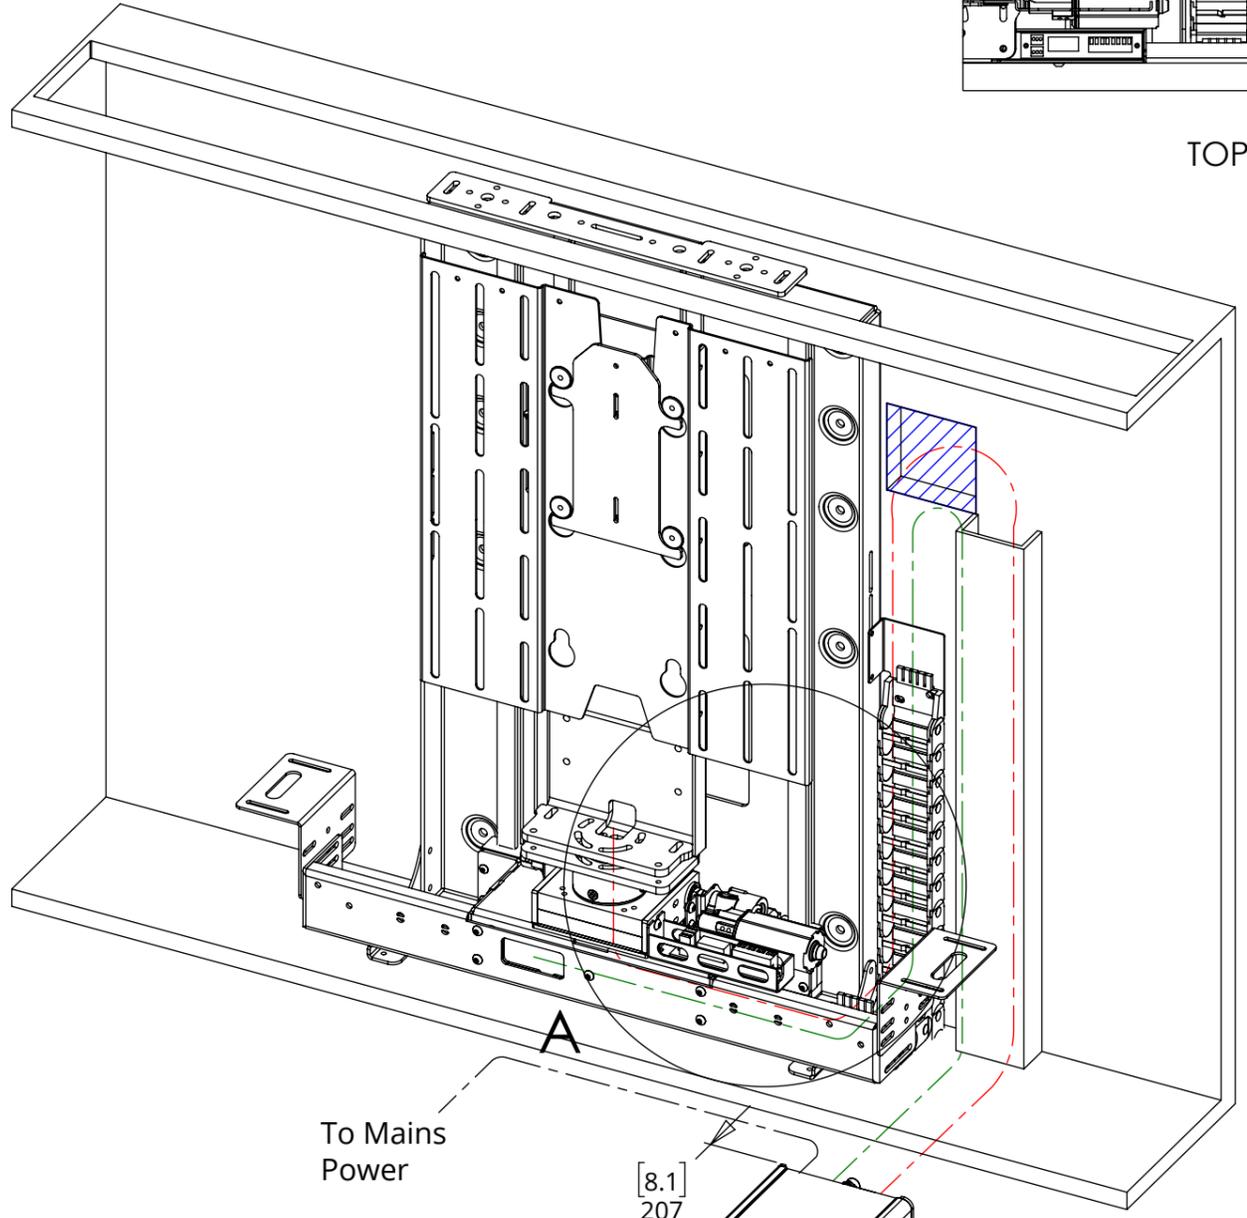

To Mains Power

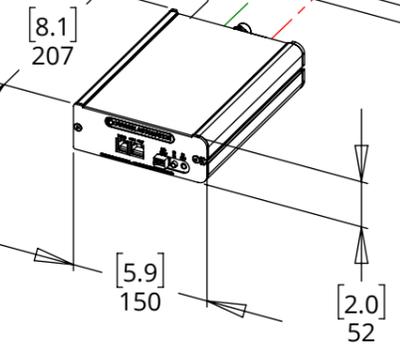


LSM-S-BE 2

LIFT SYSTEM SWIVEL FOR BOX ENCLOSURE



MECHANISM UP - IN CABINET

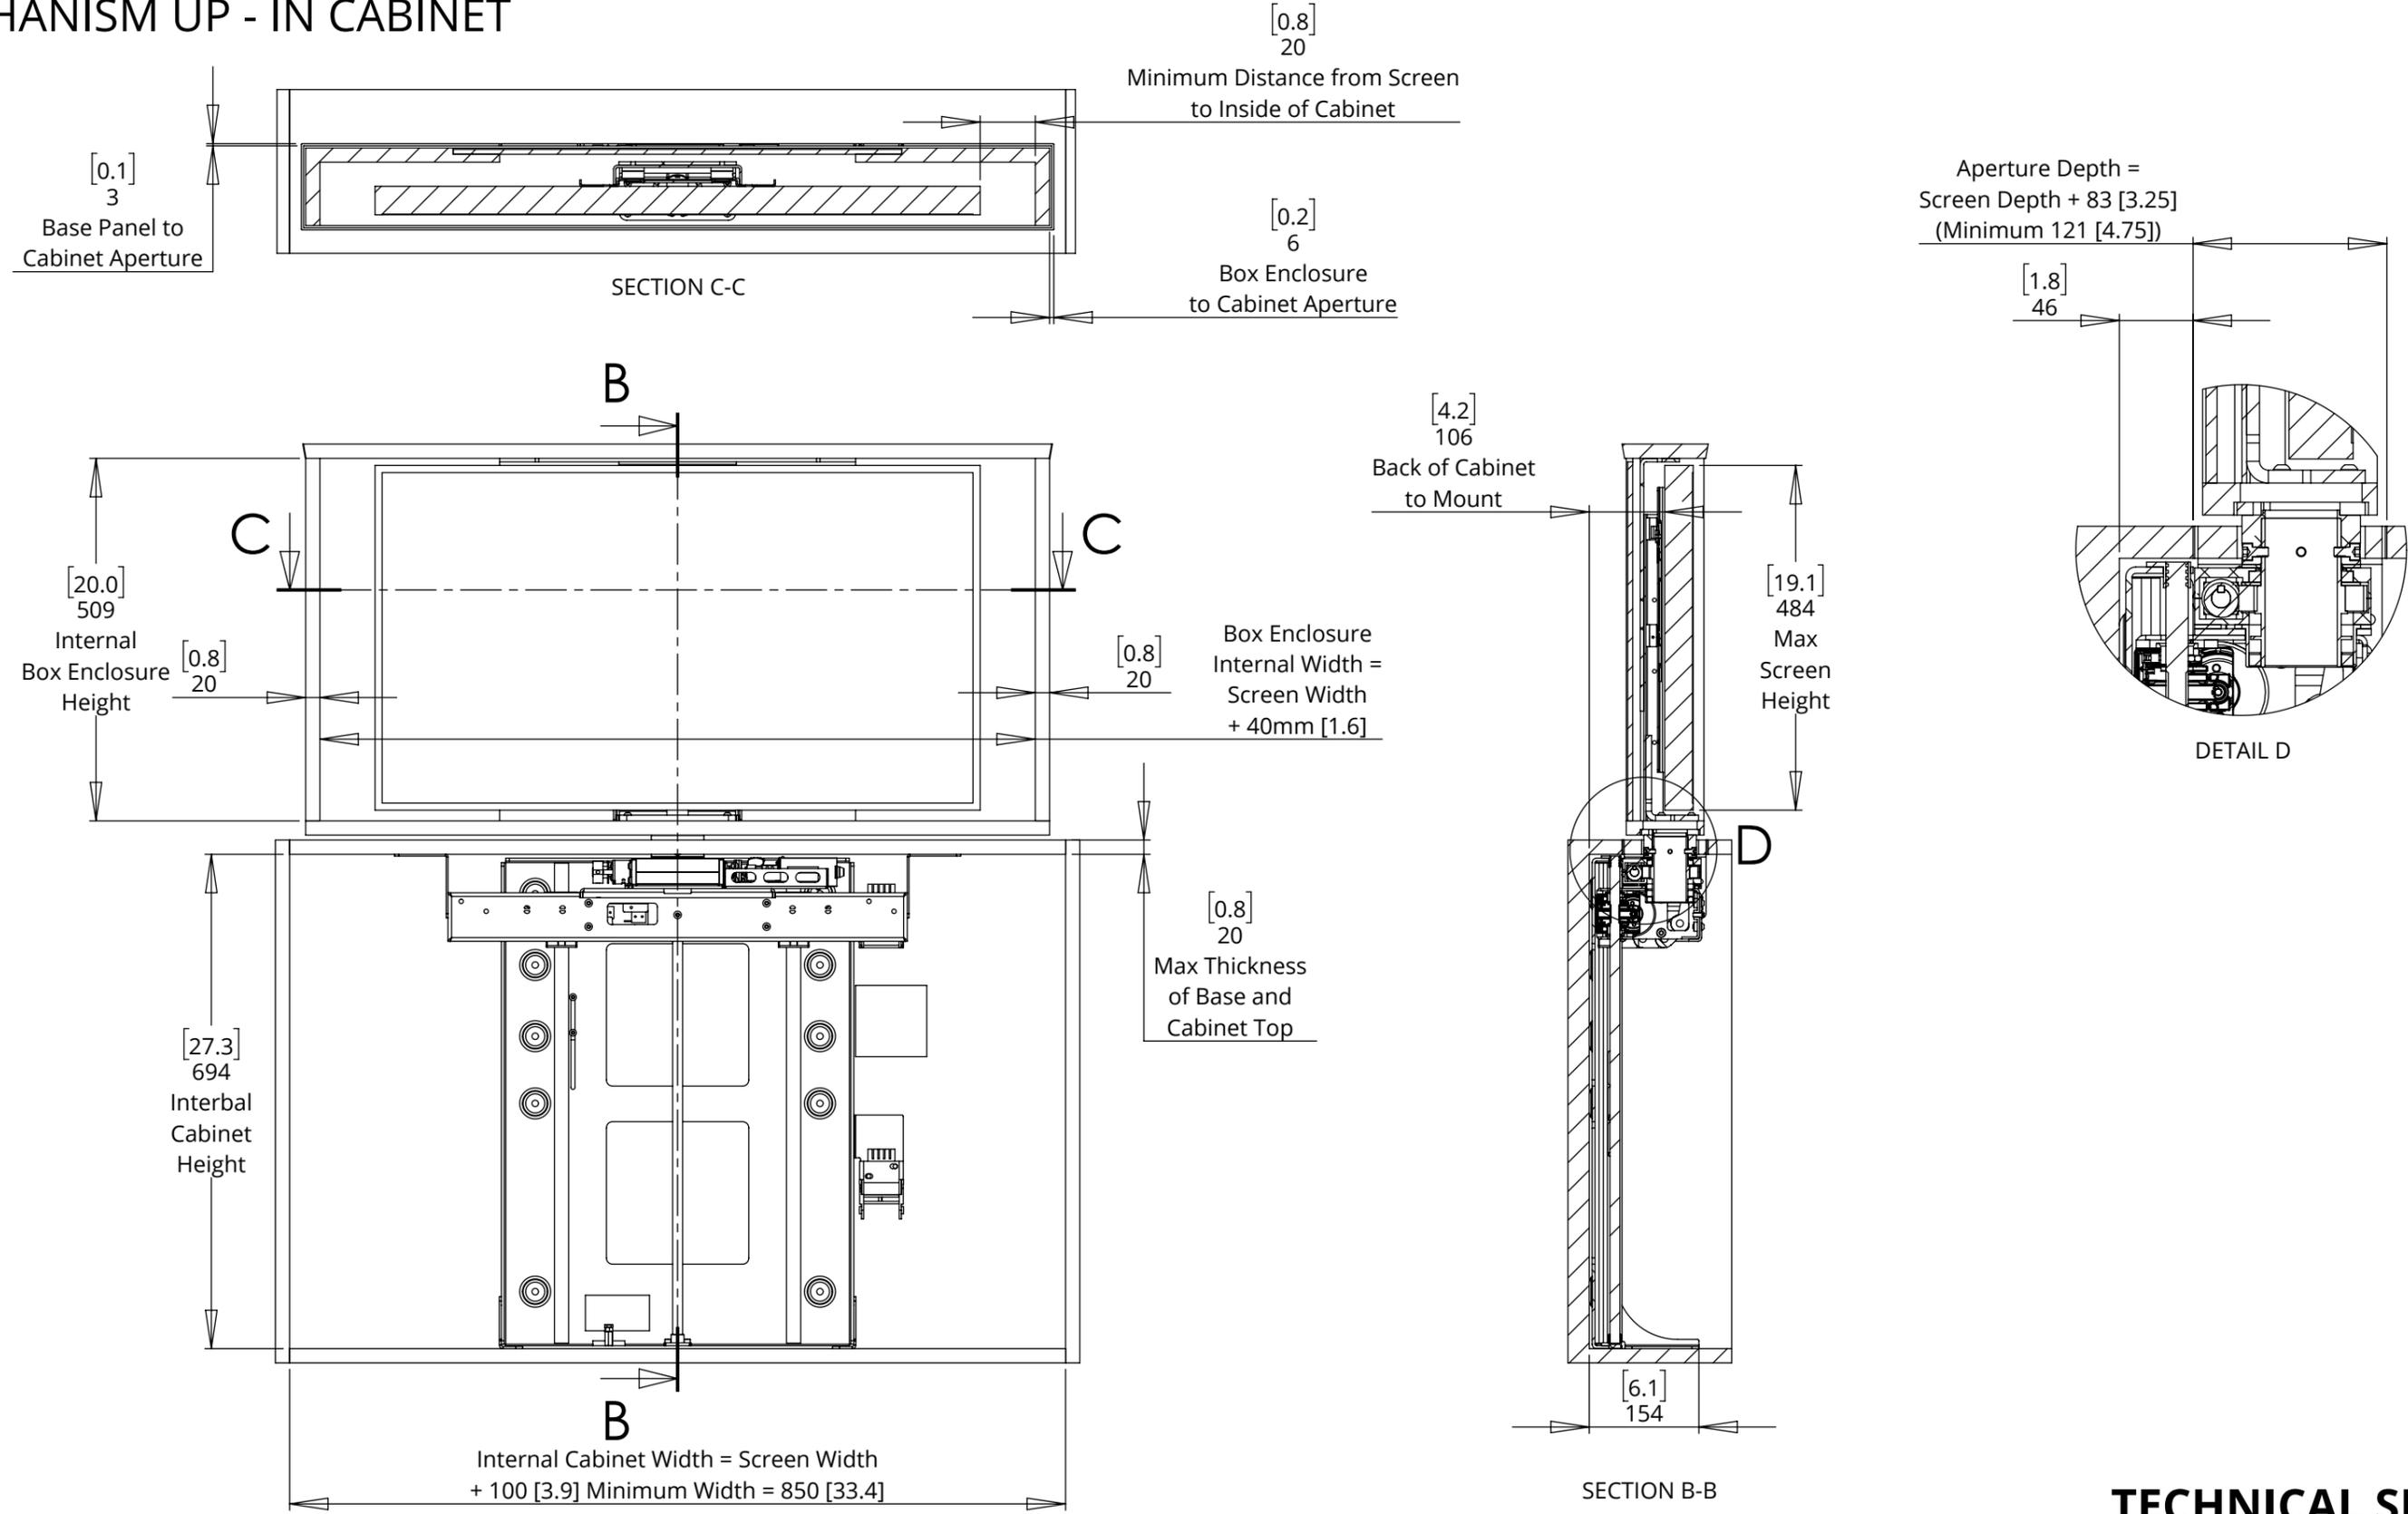


LSM-S-BE 2

LIFT SYSTEM SWIVEL FOR BOX ENCLOSURE






future automation

MECHANISM DOWN - IN CABINET

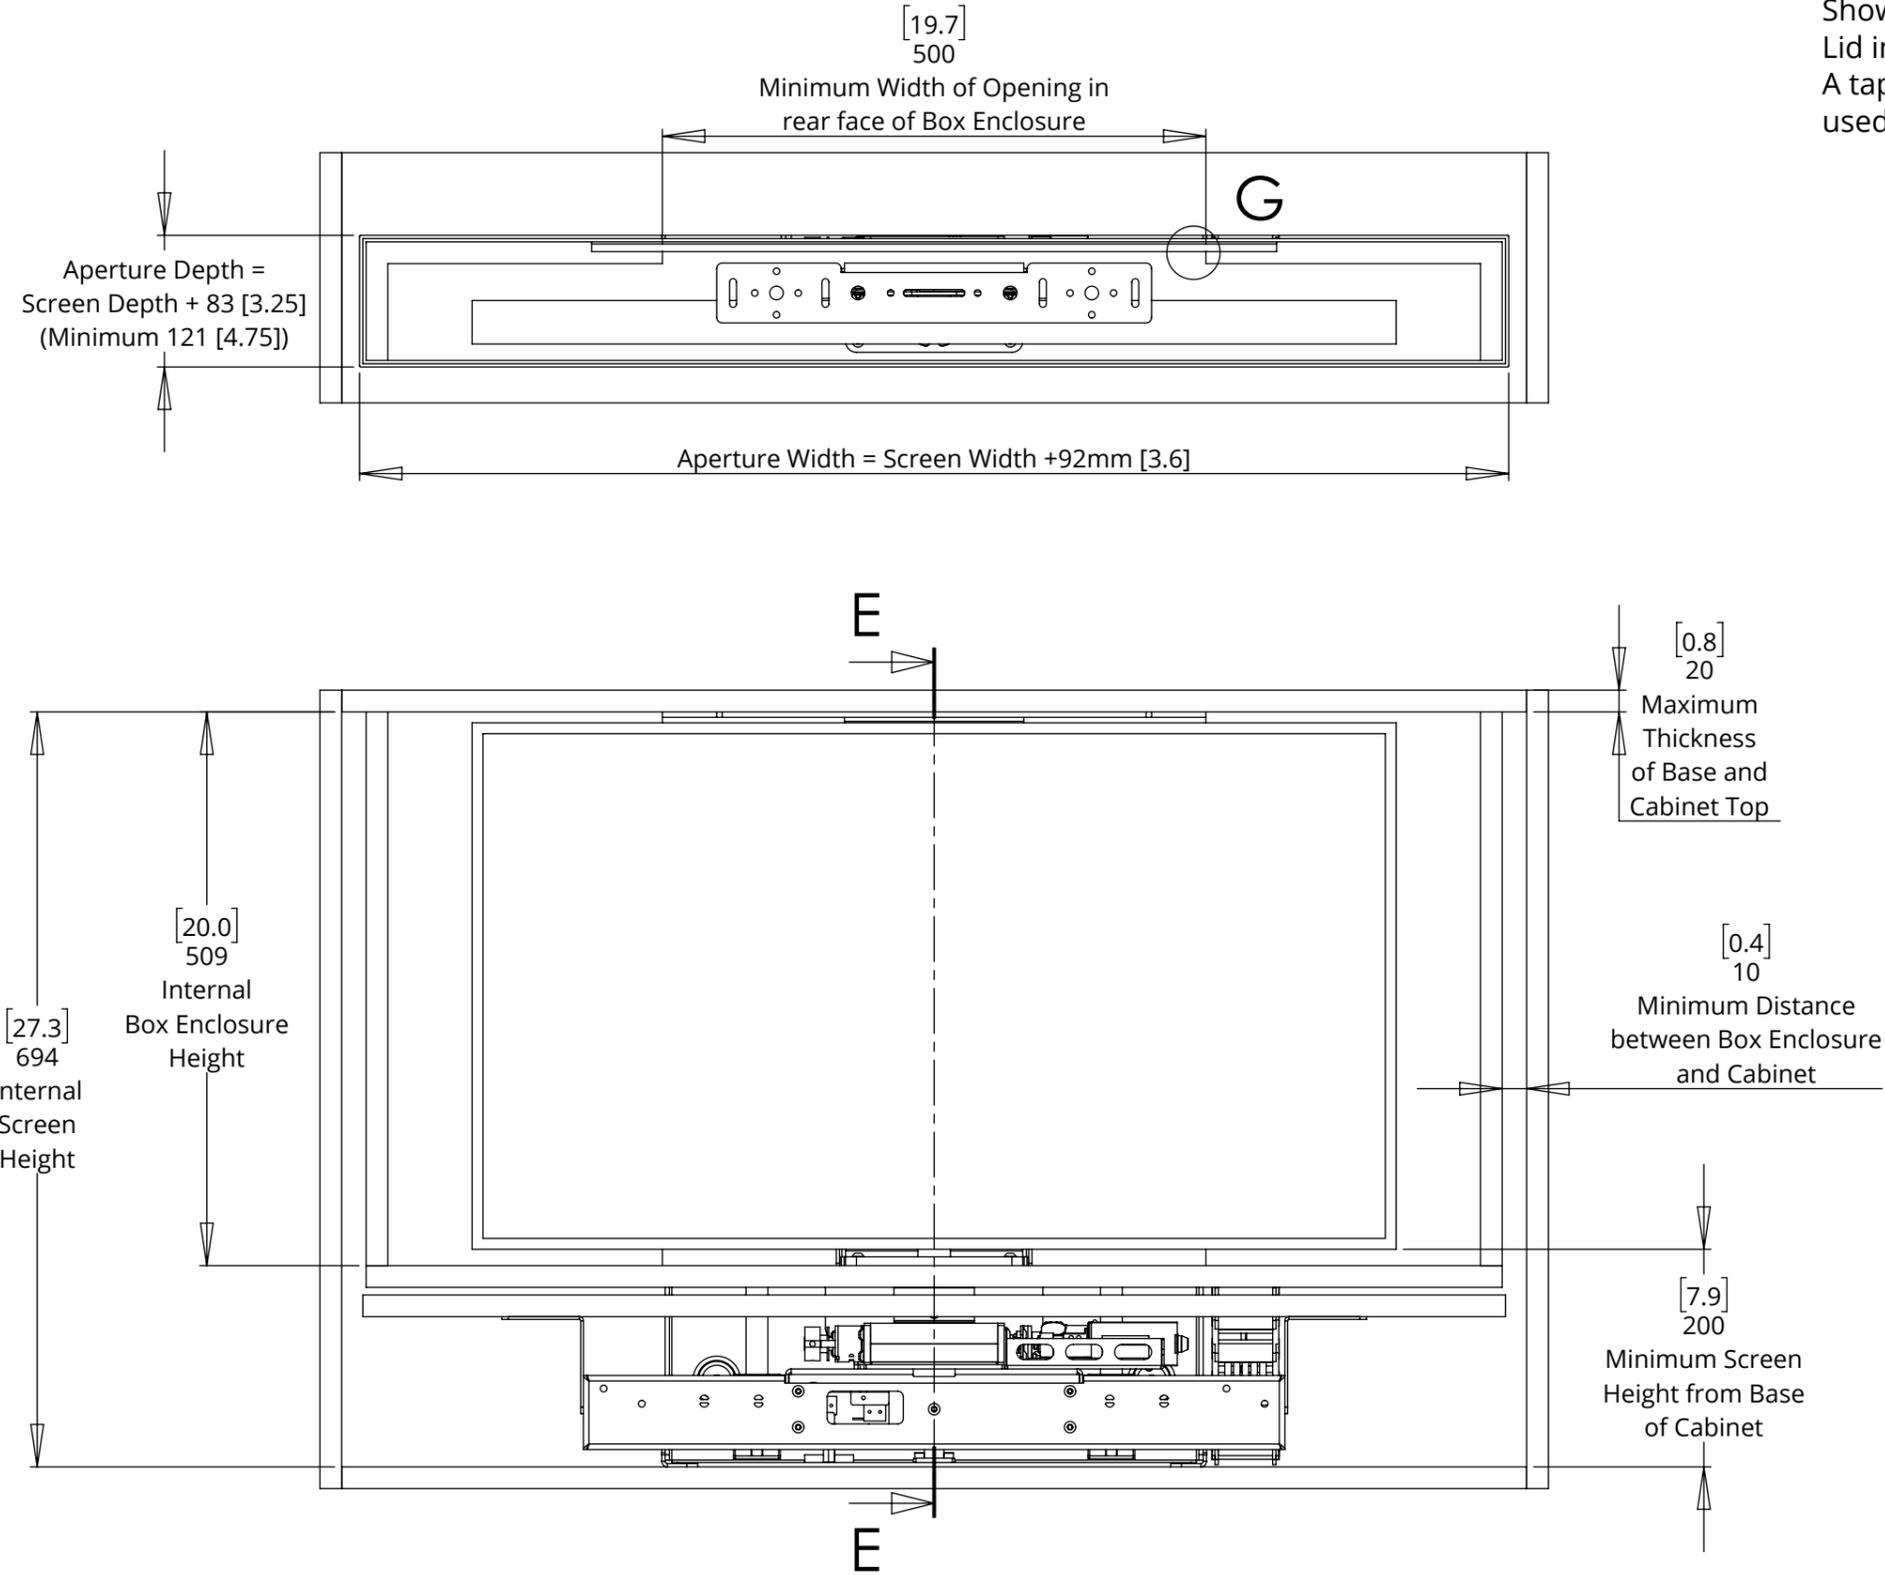

Shown with tapered Box Enclosure Lid in square Cabinet Aperture. A tapered Cabinet Aperture can be used to improve the fit.

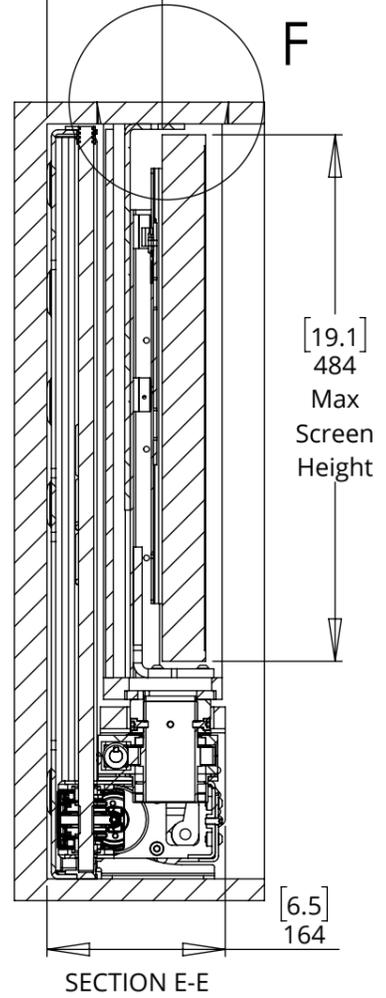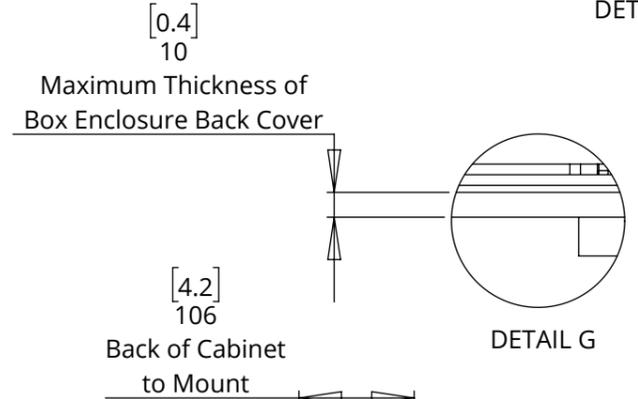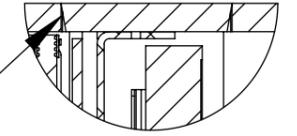





LSM-S-BE 2

LIFT SYSTEM SWIVEL FOR BOX ENCLOSURE



BASE PANEL AND BOX ENCLOSURE LID DETAILS

NOTE: A tapered Box Enclosure Lid creates a good fit in the Cabinet Aperture and helps the Box Enclosure to locate within the cabinet.

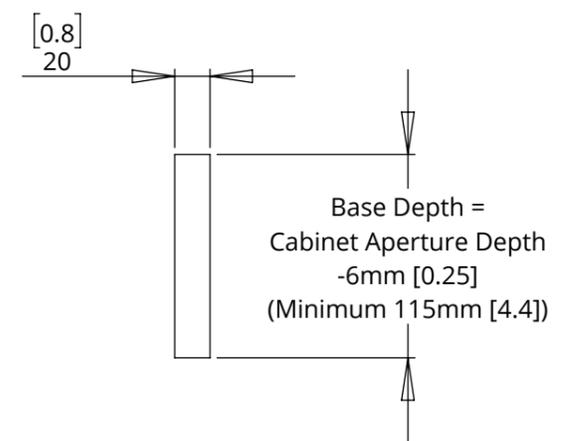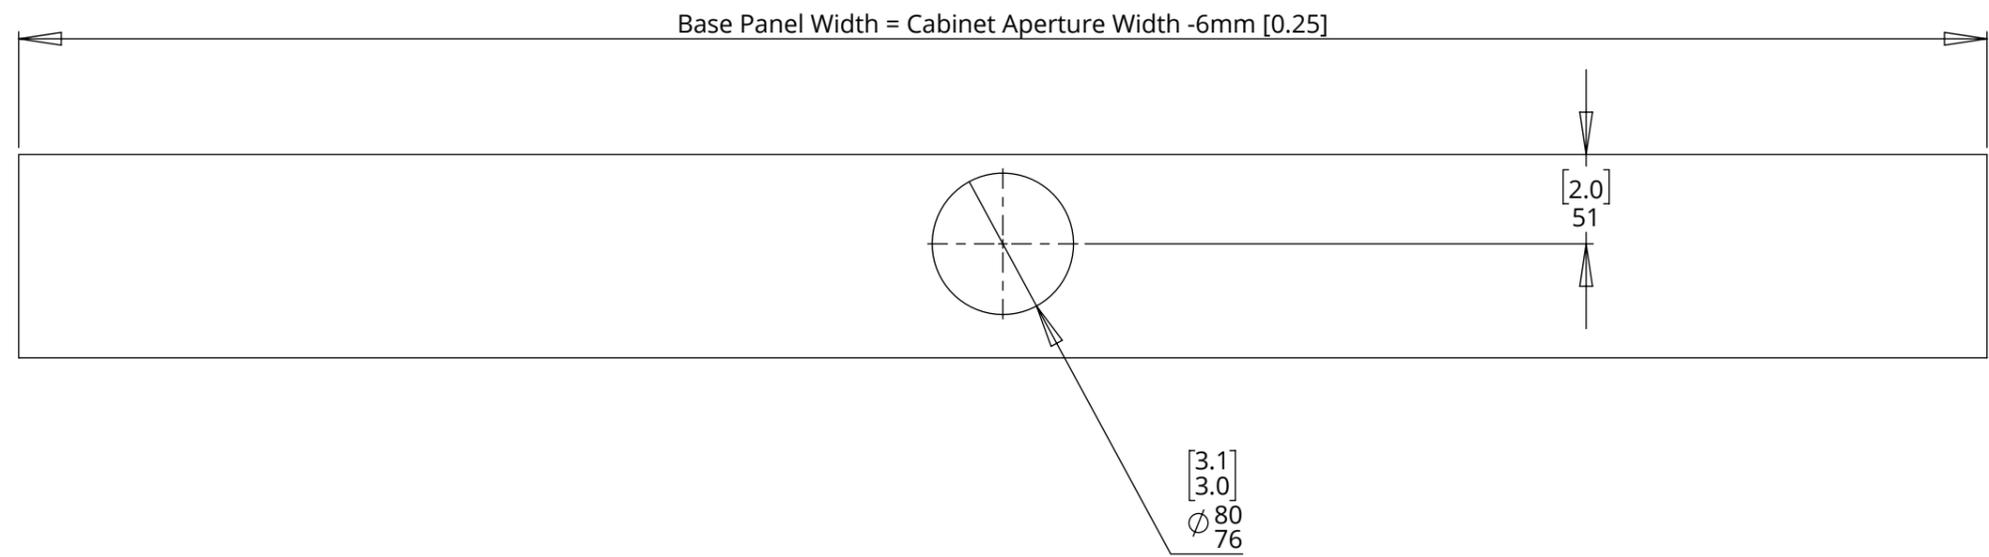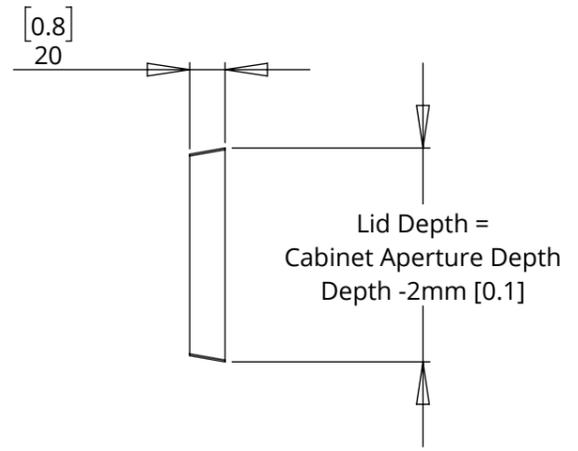
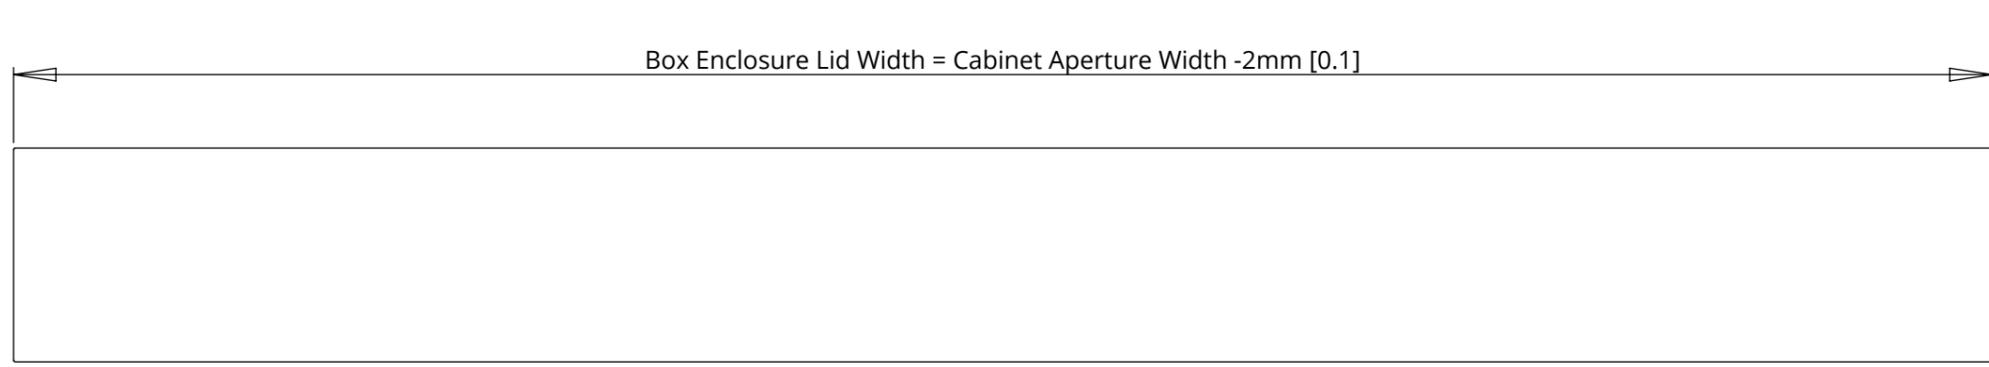


LSM-S-BE 2

LIFT SYSTEM SWIVEL FOR BOX ENCLOSURE



BOX ENCLOSURE BASE DETAILS

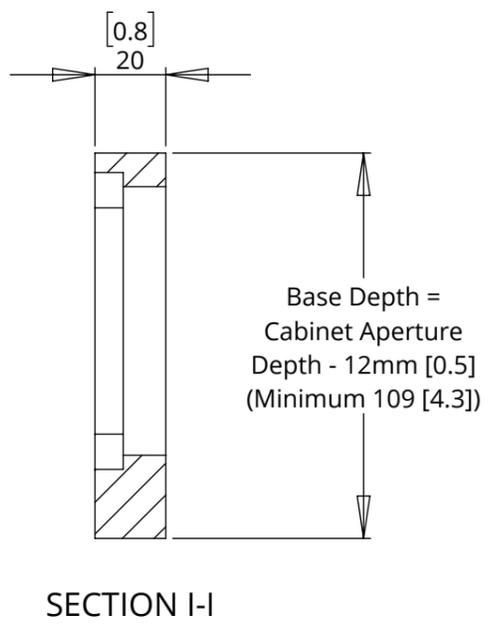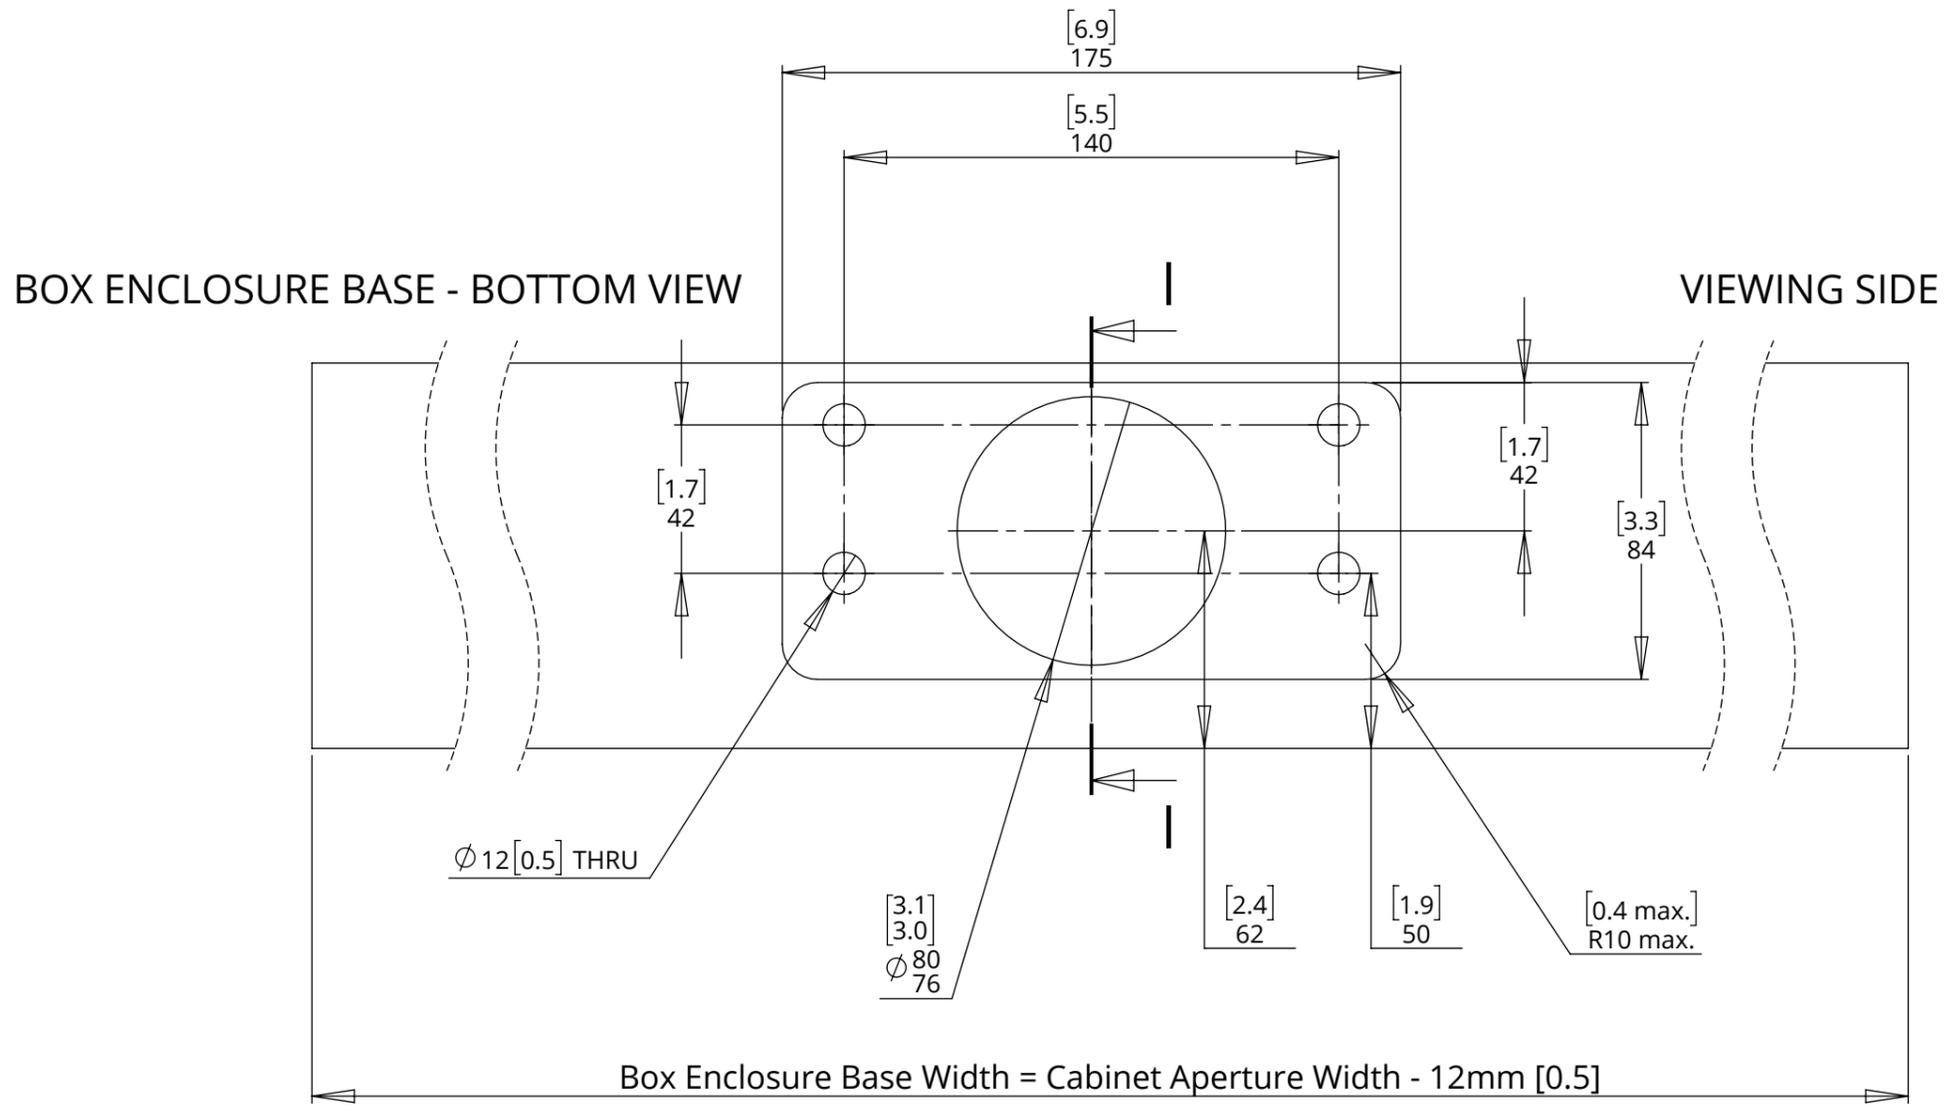


LSM-S-BE 2

LIFT SYSTEM SWIVEL FOR BOX ENCLOSURE



MECHANISM INSTALLATION OVERVIEW

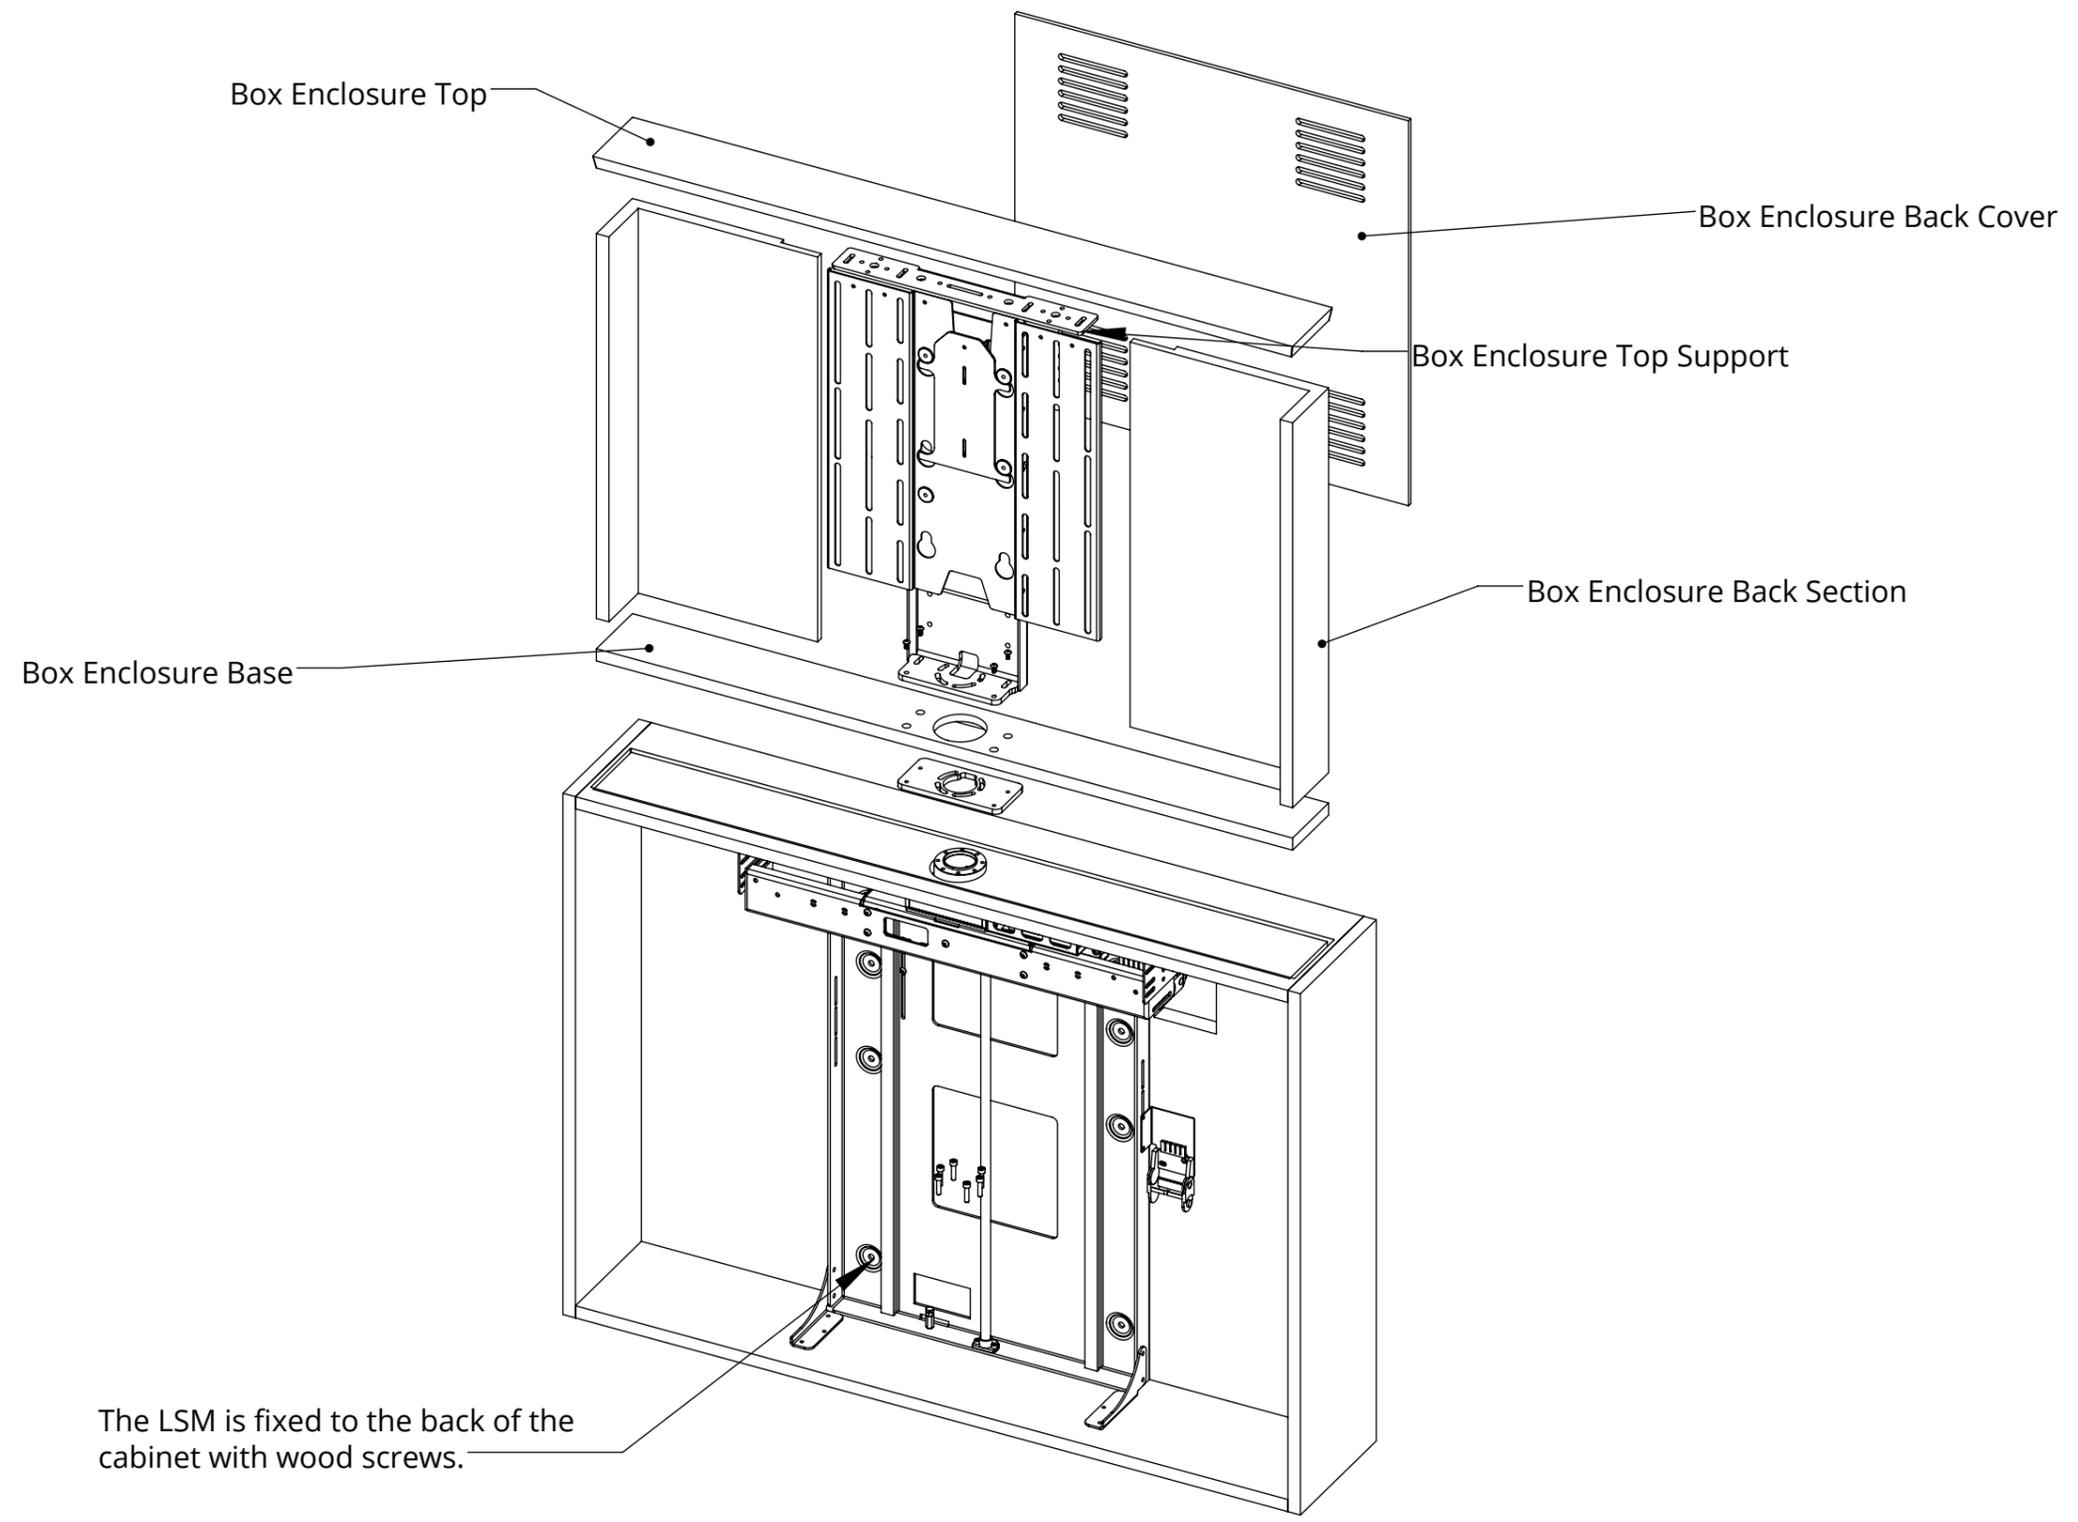


LSM-S-BE 2

LIFT SYSTEM SWIVEL FOR BOX ENCLOSURE

OVERALL MECHANISM DIMENSIONS

MECHANISM - UP POSITION

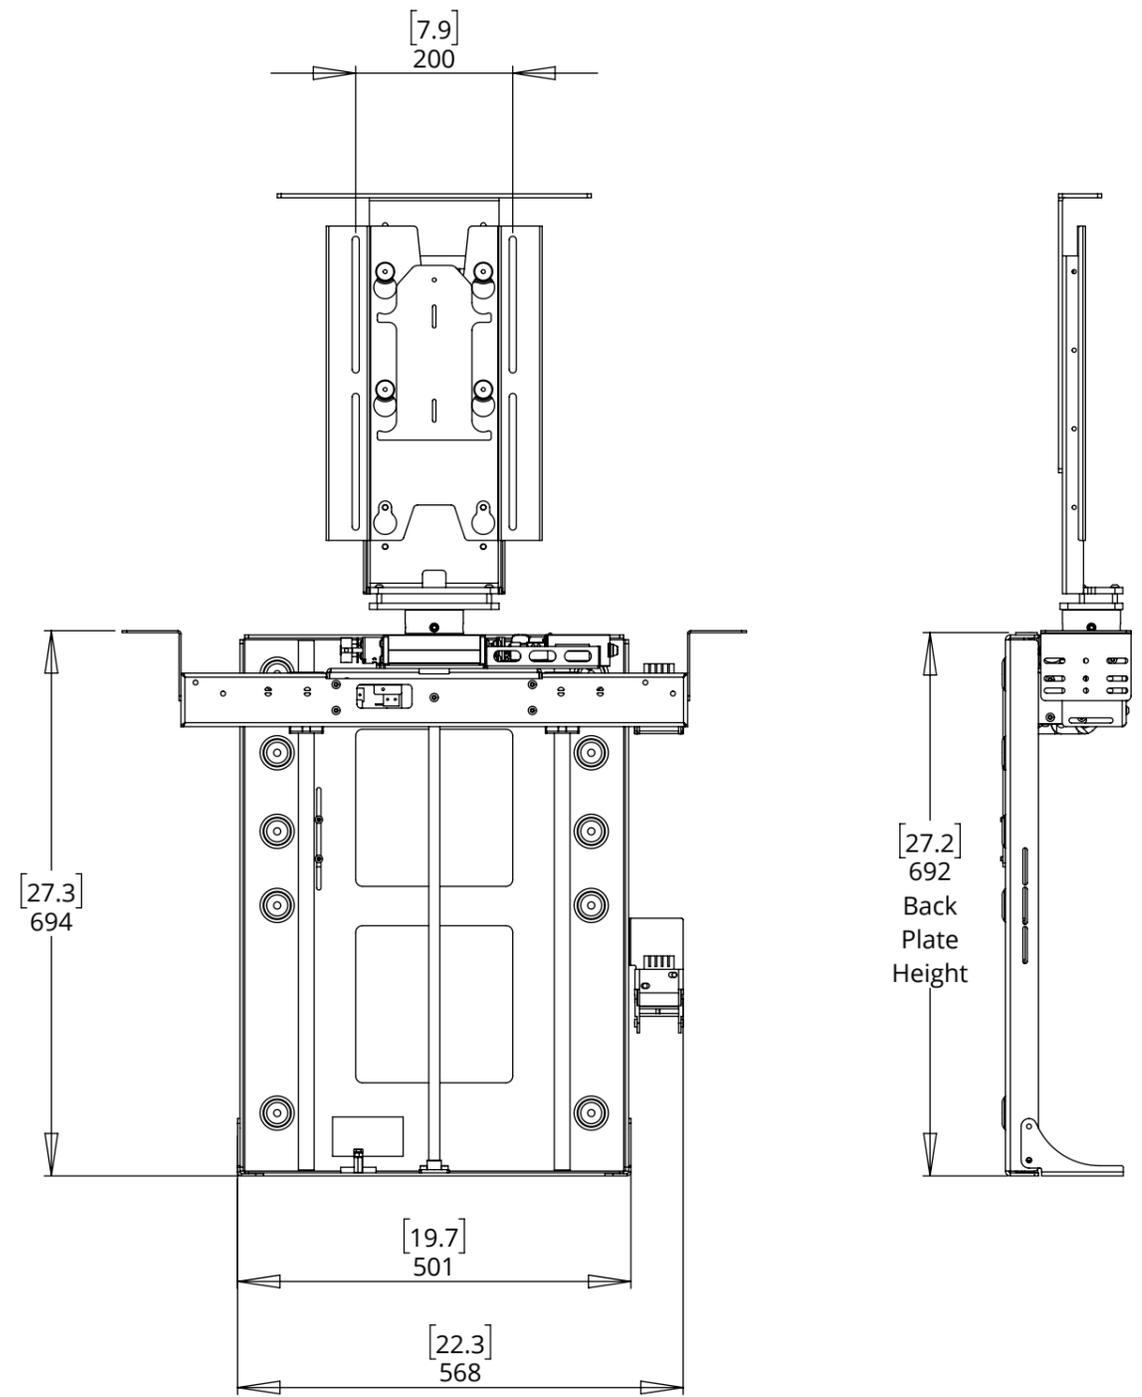

MECHANISM - DOWN POSITION

